



CY241V08A-01,04
CY241V8A-01

MPEG Clock Generator with VCXO


Features

- Integrated phase-locked loop (PLL)
- Low-jitter, high-accuracy outputs
- VCXO with analog adjust
- 3.3V operation
- Compatible with MK3727 (–1, –4)
- Application compatibility for a wide variety of designs
- Enables design compatibility
- Lower drive strength settings (CY241V08A–04)

Benefits


- Digital VCXO control
- Second source for existing designs
- Highest-performance PLL tailored for multimedia applications
- Meets critical timing requirements in complex system designs

CY241V08A-01,-04 Logic Block Diagram

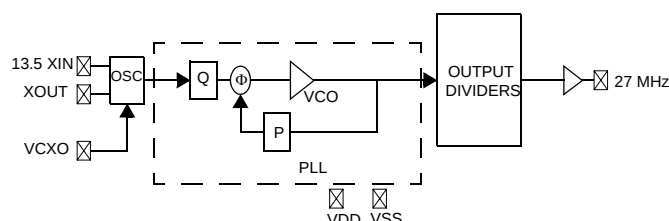

Pin Configurations

CY241V08A-01,-04 8-pin SOIC



Part Number	Outputs	Input Frequency Range	Output Frequencies	VCXO Control Curve	Other Features
CY241V08A-01	1	13.5-MHz pullable crystal input per Cypress specification	1 copy of 27 MHz	linear	Compatible with MK3727
CY241V08A-04	1	13.5-MHz pullable crystal input per Cypress specification	1 copy of 27 MHz	linear	Same as CY241V08A-01 except lower drive strength settings

Pin Description

Name	Pin Number	Description
XIN	1	Reference crystal input
VDD	2	Voltage supply
VCXO	3	Input analog control for VCXO
VSS	4	Ground
27 MHz	5	27-MHz clock output
NC/VDD	6	No connect or voltage supply
NC/VSS	7	No connect or ground
XOUT	8	Reference crystal output



Absolute Maximum Conditions

(Above which the useful life may be impaired. For user guidelines, not tested.)

Supply Voltage (V_{DD}) -0.5 to +7.0V
DC Input Voltage -0.5V to $V_{DD} + 0.5$

Storage Temperature (Non-condensing) -55°C to +125°C
Junction Temperature -40°C to +125°C
Data Retention @ $T_j = 125^\circ\text{C}$ > 10 years
Package Power Dissipation 350 mW
ESD (Human Body Model) MIL-STD-883 > 2000V

Pullable Crystal Specifications^[1]

Parameter	Description	Comments	Min.	Typ.	Max.	Unit
F_{NOM}	Nominal crystal frequency	Parallel resonance, fundamental mode, AT cut	–	13.5	–	MHz
C_{LNOM}	Nominal load capacitance		–	14	–	pF
R_1	Equivalent series resistance (ESR)	Fundamental mode	–	–	25	Ω
R_3/R_1	Ratio of third overtone mode ESR to fundamental mode ESR	Ratio used because typical R_1 values are much less than the maximum spec	3	–	–	–
DL	Crystal drive level	No external series resistor assumed	150	–	–	μW
F_{3SEPHI}	Third overtone separation from $3 \cdot F_{NOM}$	High side	300	–	–	ppm
F_{3SEPLO}	Third overtone separation from $3 \cdot F_{NOM}$	Low side	–	–	–150	ppm
C_0	Crystal shunt capacitance		–	–	7	pF
C_0/C_1	Ratio of shunt to motional capacitance		180	–	250	–
C_1	Crystal motional capacitance		14.4	18	21.6	fF

Recommended Operating Conditions

Parameter	Description	Min.	Typ.	Max.	Unit
VDD	Operating Voltage	3.135	3.3	3.465	V
T_A	Ambient Temperature	0	–	70	$^\circ\text{C}$
C_{LOAD}	Max. Load Capacitance	–	–	15	pF
t_{PU}	Power-up time for all VDD pins to reach minimum specified voltage (power ramps must be monotonic)	0.05	–	500	ms

DC Electrical Specifications

Parameter	Name	Description	Min.	Typ.	Max.	Unit
I_{OH}	Output HIGH Current	$V_{OH} = V_{DD} - 0.5V$, $V_{DD} = 3.3V$	12	24	–	mA
I_{OL}	Output LOW Current	$V_{OL} = 0.5V$, $V_{DD} = 3.3V$	12	24	–	mA
C_{IN}	Input Capacitance	Except XIN, XOUT pins	–	–	7	pF
V_{VCXO}	VCXO Input Range		0	–	V_{DD}	V
$f_{\Delta XO}^{[2]}$	VCXO Pullability Range	Low Side	–	–	–115	ppm
		High Side	115	–	–	ppm
I_{VDD}	Supply Current		–	30	35	mA

Notes:

- Crystals that meet this specification includes: Ecliptek ECX-5788-13.500M, Siward XTL001050A-13.5-14-400, Raltron A-13.500-14-CL, PDI HA13500XFSA14XC.
- 115/+115 ppm assumes 2.5pF of additional board level load capacitance. This range will be shifted down with more board capacitance or shifted up with less board capacitance.

AC Electrical Specifications ($V_{DD} = 3.3V$) ^[3]

Parameter ^[3]	Name	Description	Min.	Typ.	Max.	Unit
DC	Output Duty Cycle	Duty Cycle is defined in <i>Figure 1</i> , 50% of V_{DD}	45	50	55	%
ER _{OR}	Rising Edge Rate –01	Output Clock Edge Rate, Measured from 20% to 80% of V_{DD} , CLOAD = 15 pF See <i>Figure 2</i> .	0.8	1.4	–	V/ns
ER _{OF}	Falling Edge Rate –01	Output Clock Edge Rate, Measured from 80% to 20% of V_{DD} , CLOAD = 15 pF See <i>Figure 2</i> .	0.8	1.4	–	V/ns
ER _{OR}	Rising Edge Rate –04	Output Clock Edge Rate, Measured from 20% to 80% of V_{DD} , CLOAD = 15 pF See <i>Figure 2</i> .	0.7	1.1	–	V/ns
ER _{OF}	Falling Edge Rate –04	Output Clock Edge Rate, Measured from 80% to 20% of V_{DD} , CLOAD = 15 pF See <i>Figure 2</i> .	0.7	1.1	–	V/ns
t ₉	Clock Jitter	Peak-to-peak period jitter	–	–	100	ps
t ₁₀	PLL Lock Time		–	–	3	ms



Test and Measurement Set-up

Voltage and Timing Definitions


Figure 1. Duty Cycle Definition




Figure 2. ER = $(0.6 \times V_{DD})/t_3$, EF = $(0.6 \times V_{DD})/t_4$

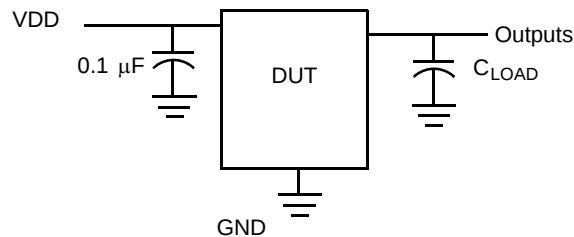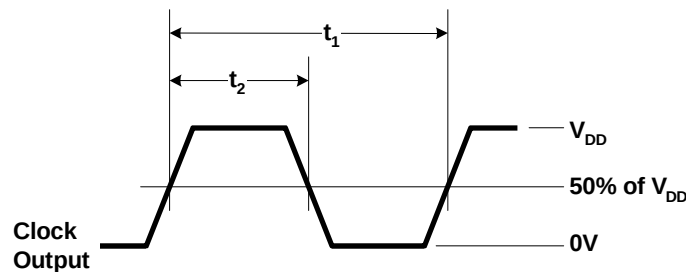
Note:
3. Not 100% tested.

Ordering Information

Ordering Code	Package Type	Operating Range	Operating Voltage	Features
CY241V08ASC-01	8-pin SOIC	Commercial	3.3V	Linear VCXO control curve
CY241V08ASC-01T	8-pin SOIC – Tape and Reel	Commercial	3.3V	Linear VCXO control curve
CY241V08ASC-04	8-pin SOIC	Commercial	3.3V	Linear VCXO control curve
CY241V08ASC-04T	8-pin SOIC – Tape and Reel	Commercial	3.3V	Linear VCXO control curve
Lead-free				
CY241V8ASXC-01	8-pin SOIC	Commercial	3.3V	Linear VCXO control curve
CY241V8ASXC-01T	8-pin SOIC - Tape and Reel	Commercial	3.3V	Linear VCXO control curve

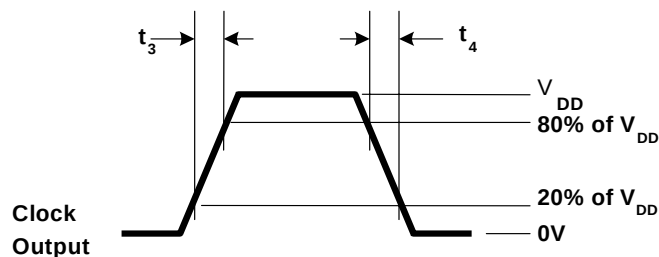Package Drawing and Dimensions

8-lead (150-Mil) SOIC S8

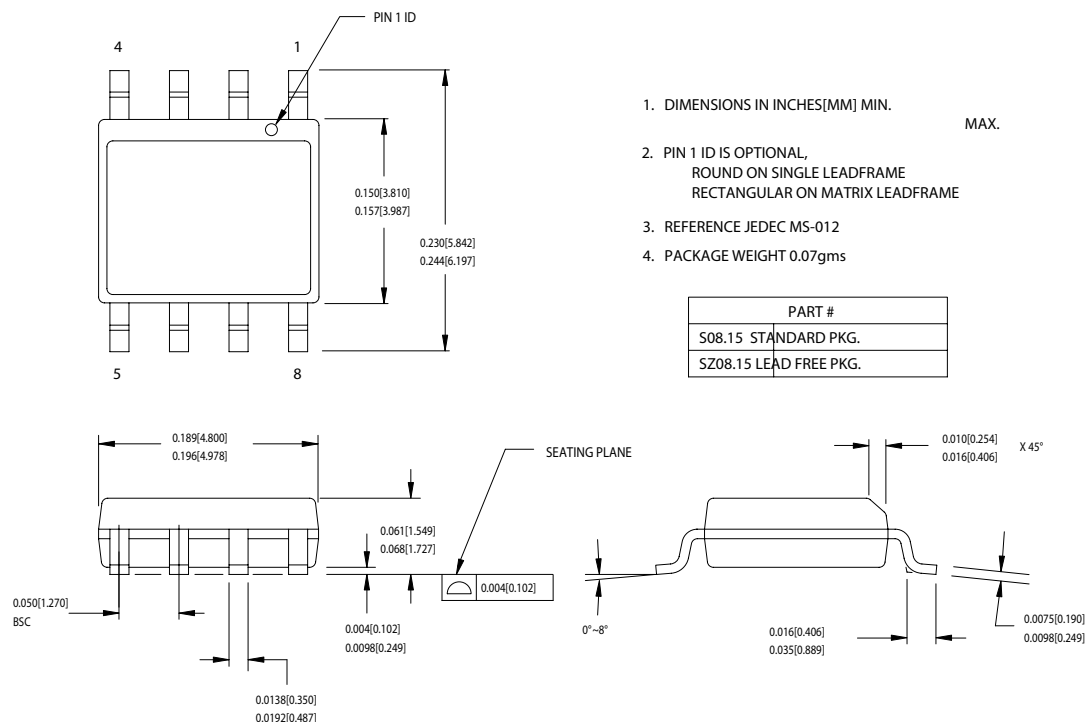

51-85066-°C

All product or company names mentioned in this document may be the trademarks of their respective holders.

Document History Page

Document Title: CY241V08A-01,04/ CY241V8A-01MPEG Clock Generator with VCXO Document Number: 38-07656				
REV.	ECN NO.	Issue Date	Orig. of Change	Description of Change
**	214069	See ECN	RGL	New Data Sheet
*A	220404	See ECN	RGL	Minor Change: To post on web
*B	393122	See ECN	RGL	Added Lead-free device for -01 Added the CY241V8A-01 in the title
*C	414184	See ECN	RGL	Minor Change: Deleted unnecessary text in the benefit section