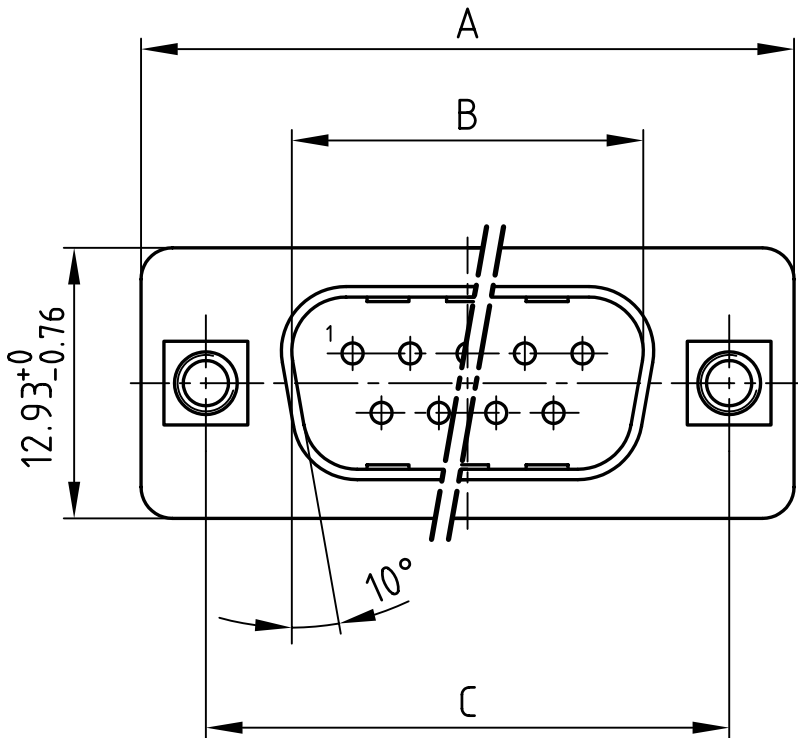
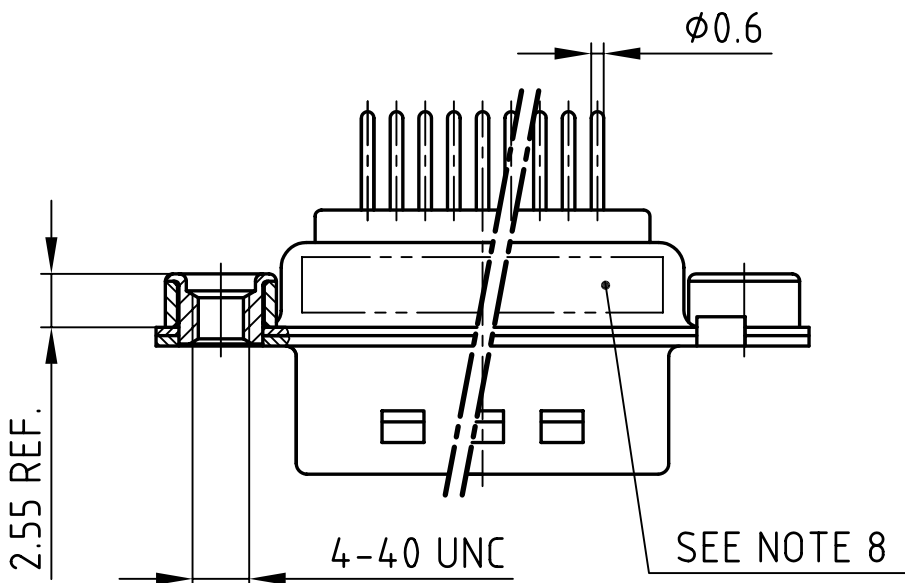
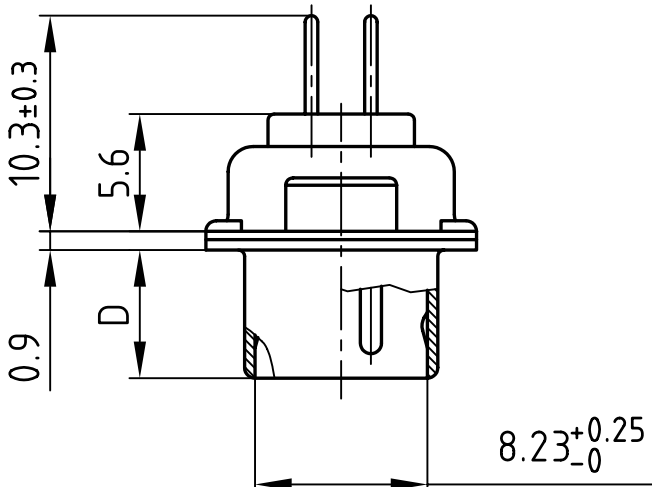


4		3		2		1																																																																																																																			
				used for:		D-SUB																																																																																																																			
F				<table><tr><th>POS.</th><th>A_{-0.76}</th><th>B_{+0.25}</th><th>C</th><th>D_{-0.3}</th><th>PART NO.</th></tr><tr><td>9</td><td>31.19</td><td>16.79</td><td>25.00^{+0.12/-0.13}</td><td>6.12</td><td>163A11369X</td></tr><tr><td>15</td><td>39.52</td><td>25.12</td><td>33.30^{+0.15/-0.1}</td><td>6.12</td><td>163A11379X</td></tr><tr><td>25</td><td>53.42</td><td>38.84</td><td>47.04^{±0.13}</td><td>5.99</td><td>163A11389X</td></tr><tr><td>37</td><td>69.70</td><td>55.30</td><td>63.50^{±0.13}</td><td>5.99</td><td>163A11399X</td></tr></table>		POS.	A _{-0.76}	B _{+0.25}	C	D _{-0.3}	PART NO.	9	31.19	16.79	25.00 ^{+0.12/-0.13}	6.12	163A11369X	15	39.52	25.12	33.30 ^{+0.15/-0.1}	6.12	163A11379X	25	53.42	38.84	47.04 ^{±0.13}	5.99	163A11389X	37	69.70	55.30	63.50 ^{±0.13}	5.99	163A11399X	F																																																																																					
POS.	A _{-0.76}	B _{+0.25}	C	D _{-0.3}	PART NO.																																																																																																																				
9	31.19	16.79	25.00 ^{+0.12/-0.13}	6.12	163A11369X																																																																																																																				
15	39.52	25.12	33.30 ^{+0.15/-0.1}	6.12	163A11379X																																																																																																																				
25	53.42	38.84	47.04 ^{±0.13}	5.99	163A11389X																																																																																																																				
37	69.70	55.30	63.50 ^{±0.13}	5.99	163A11399X																																																																																																																				
E						E																																																																																																																			
D						D																																																																																																																			
C						C																																																																																																																			
B		Directive 2002/95/EC „RoHS“ Compliant <table><tr><td colspan="4">APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL</td></tr><tr><td colspan="4">CUSTOMER APPROVAL DATE:</td></tr><tr><td colspan="2">NAME:</td><td colspan="2">TITLE:</td></tr><tr><td colspan="4">COMPANY NAME:</td></tr><tr><td colspan="4">APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL</td></tr></table>		APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL				CUSTOMER APPROVAL DATE:				NAME:		TITLE:		COMPANY NAME:				APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL				NOTES: 1. METALSHELLS: STEEL; min. 320µin TIN 2. INSULATORS: PBT GF UL 94 V-0, BLACK 3. CONTACTS: COPPER ALLOY PLATING: min. 8µin HARD GOLD over min. 50µin NICKEL 4. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL 5. COLLAR: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL 6. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K11IUA 7. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB 8. CONNECTOR IS PART MARKED: <table><tr><td>PART-NO.</td><td>CONEC</td><td>ABC</td></tr></table>		PART-NO.	CONEC	ABC	B																																																																																												
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL																																																																																																																									
CUSTOMER APPROVAL DATE:																																																																																																																									
NAME:		TITLE:																																																																																																																							
COMPANY NAME:																																																																																																																									
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL																																																																																																																									
PART-NO.	CONEC	ABC																																																																																																																							
A		THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND <table><tr><td colspan="4"></td><td colspan="2">tolerance</td><td colspan="2"></td><td colspan="2">scale: 2:1</td></tr><tr><td colspan="4"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2">material: SEE NOTES</td></tr><tr><td colspan="4"></td><td colspan="2">2002</td><td colspan="2">date</td><td colspan="2">name</td></tr><tr><td colspan="4"></td><td colspan="2">drawn</td><td colspan="2">28.06.</td><td colspan="2">Parei</td></tr><tr><td colspan="4"></td><td colspan="2">appd.</td><td colspan="2">28.06.</td><td colspan="2">E. Mickenbecker</td></tr><tr><td colspan="4"></td><td colspan="2">norm</td><td colspan="2">DIN 41652</td><td colspan="2"></td></tr><tr><td colspan="4"></td><td colspan="2">d-old</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="4"></td><td colspan="2">a</td><td colspan="2">Origin</td><td colspan="2"></td></tr><tr><td colspan="2">rev.</td><td colspan="2">description</td><td colspan="2">date</td><td colspan="2">name</td><td colspan="2"></td></tr></table>						tolerance				scale: 2:1										material: SEE NOTES						2002		date		name						drawn		28.06.		Parei						appd.		28.06.		E. Mickenbecker						norm		DIN 41652								d-old										a		Origin				rev.		description		date		name				<table><tr><td colspan="2">title:</td></tr><tr><td colspan="2">D-SUB MALE</td></tr><tr><td colspan="2">9-37pos. SOLDER PIN STRAIGHT</td></tr><tr><td colspan="2">with threaded insert</td></tr><tr><td colspan="2">dwg no:</td></tr><tr><td colspan="2">AutoCAD 2000</td></tr><tr><td colspan="2">DIN-A</td></tr><tr><td colspan="2">16K1A696</td></tr><tr><td colspan="2">4</td></tr><tr><td colspan="2">sh: 1/1</td></tr><tr><td colspan="2">part no:</td></tr><tr><td colspan="2">SEE TABLE</td></tr></table>		title:		D-SUB MALE		9-37pos. SOLDER PIN STRAIGHT		with threaded insert		dwg no:		AutoCAD 2000		DIN-A		16K1A696		4		sh: 1/1		part no:		SEE TABLE		A	
				tolerance				scale: 2:1																																																																																																																	
								material: SEE NOTES																																																																																																																	
				2002		date		name																																																																																																																	
				drawn		28.06.		Parei																																																																																																																	
				appd.		28.06.		E. Mickenbecker																																																																																																																	
				norm		DIN 41652																																																																																																																			
				d-old																																																																																																																					
				a		Origin																																																																																																																			
rev.		description		date		name																																																																																																																			
title:																																																																																																																									
D-SUB MALE																																																																																																																									
9-37pos. SOLDER PIN STRAIGHT																																																																																																																									
with threaded insert																																																																																																																									
dwg no:																																																																																																																									
AutoCAD 2000																																																																																																																									
DIN-A																																																																																																																									
16K1A696																																																																																																																									
4																																																																																																																									
sh: 1/1																																																																																																																									
part no:																																																																																																																									
SEE TABLE																																																																																																																									
4		3		2		1																																																																																																																			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[163A11369X](#) [163A11389X](#)