


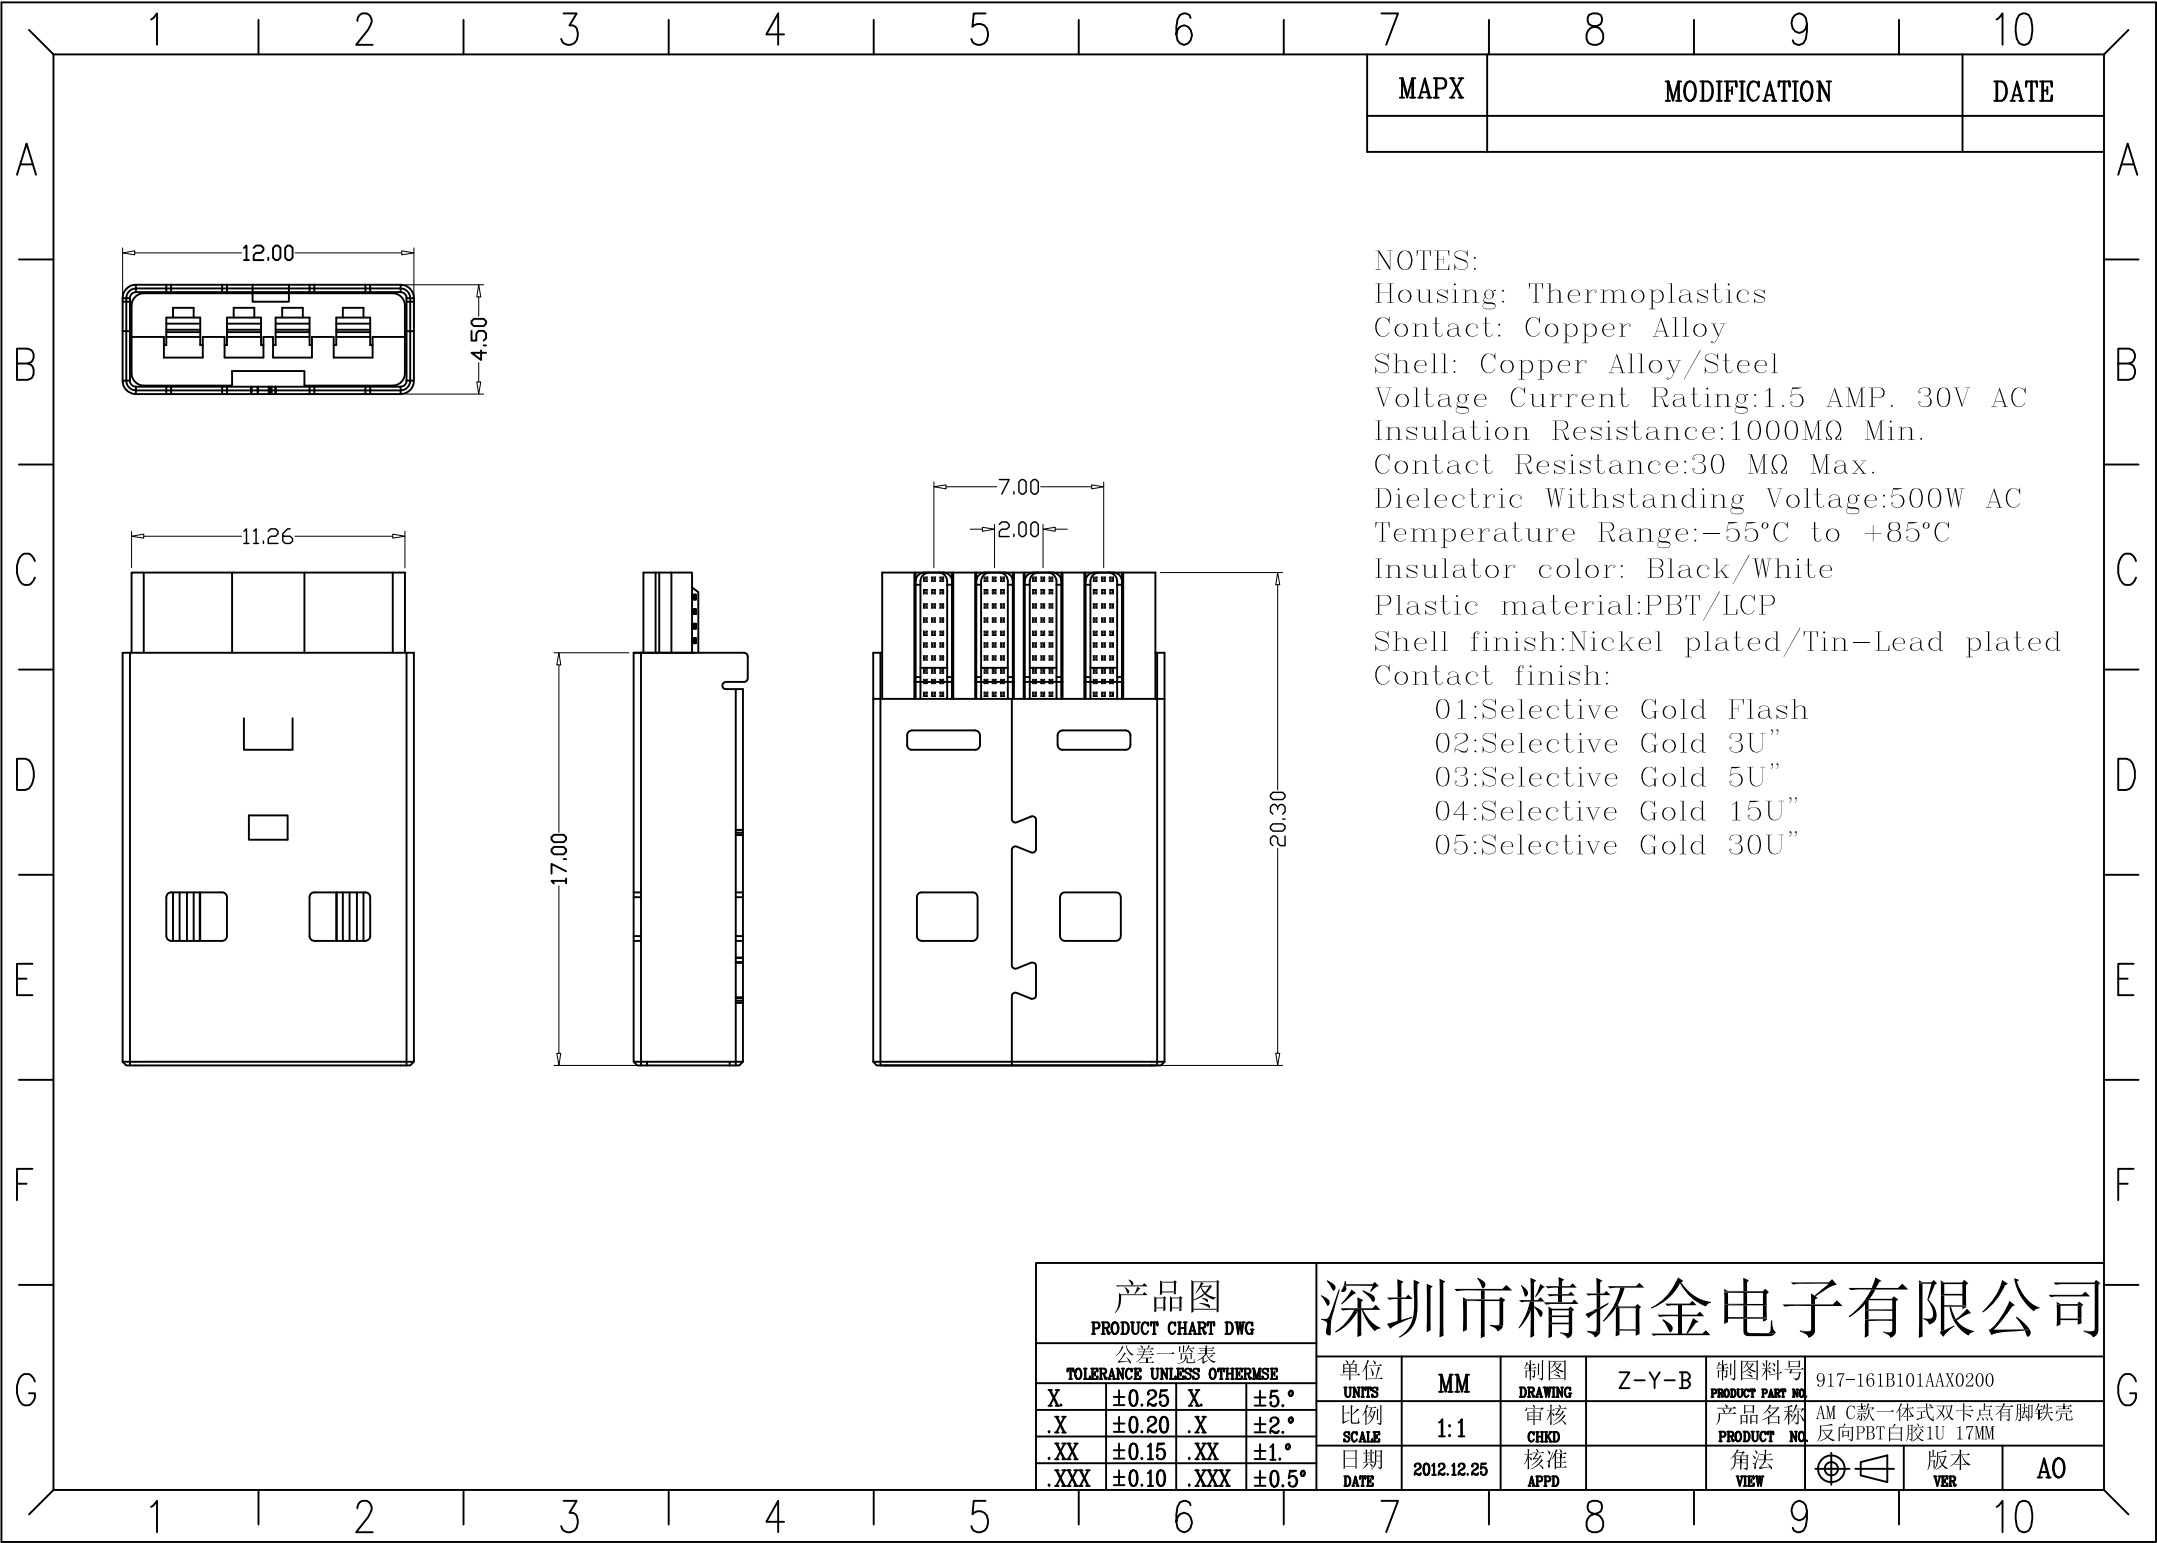

MAPX	MODIFICATION	DATE

NOTES:
Housing: Thermoplastics
Contact: Copper Alloy
Shell: Copper Alloy/Steel
Voltage Current Rating:1.5 AMP. 30V AC
Insulation Resistance:1000MΩ Min.
Contact Resistance:30 MΩ Max.
Dielectric Withstanding Voltage:500W AC
Temperature Range:-55°C to +85°C
Insulator color: Black/White
Plastic material:PBT/LCP
Shell finish:Nickel plated/Tin-Lead plated
Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	917-161B101AAX0200
X	±0.25	X	±5.°	比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AM C款一体式双卡点有脚铁壳 反向PBT白胶1U 17MM
.X	±0.20	.X	±2.°	日期 DATE	2012.12.25	核准 APPD		角法 VIEW	
.XX	±0.15	.XX	±1.°					版本 VER	A0
.XXX	±0.10	.XXX	±0.5°						