



PART NO.		MATERIAL:	"A" REF.	"B" REF.	"C" REF.	PANEL THICKNESS RANGE	"GAP" REF.
SOLID LENGTHS	SERRATED LENGTHS						
*NGSG-2	SNGSG-2	NYLON (RMS-88)	.172 (4.4)	.031 (0.8)	.109 (2.8)	.037-.071 (0.9-1.8)	.037 (0.9)
*NGSG-2.5	*SNGSG-2.5					.072-.105 (1.8-2.7)	.060 (1.5)
*NGSG-3	*SNGSG-3		.188 (4.8)	.047 (1.2)	.156 (4.0)	.106-.164 (2.7-4.2)	.106 (2.7)
PGSG-2	SPGSG-2	POLYETHYLENE (RMS-418)	.172 (4.4)	.031 (0.8)	.109 (2.8)	.037-.071 (0.9-1.8)	.037 (0.9)
PGSG-2.5	SPGSG-2.5					.072-.105 (1.8-2.7)	.060 (1.5)
PGSG-3	SPGSG-3		.188 (4.8)	.047 (1.2)	.156 (4.0)	.106-.164 (2.7-4.2)	.106 (2.7)
PGSG-6	*SPGSG-6		.160 (4.1)	.025 (0.6)	.060 (1.5)	.037-.071 (0.9-1.8)	.037 (0.9)
**PGSG-7	*SPGSG-7		.188 (4.8)	.035 (0.9)	.100 (2.5)	.072-.105 (1.8-2.7)	.060 (1.5)
**PGSG-8	*SPGSG-8		.188 (4.8)	.035 (0.9)	.156 (4.0)	.106-.164 (2.7-4.2)	.106 (2.7)

*P/N: ...-6 & ...-7 & ...-8 EXTRA FLEXIBLE

*BLACK PARTS AVAILABLE BY SPECIAL ORDER ONLY

** PARTS AVAILABLE BY SPECIAL ORDER IN BOTH COLORS

PRESSURE-SENSITIVE
ADHESIVE (RMS-96)

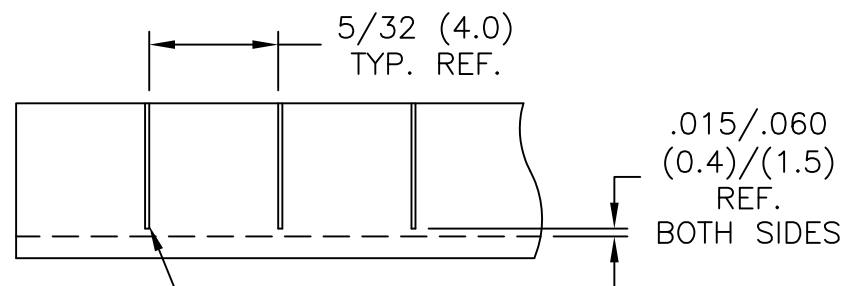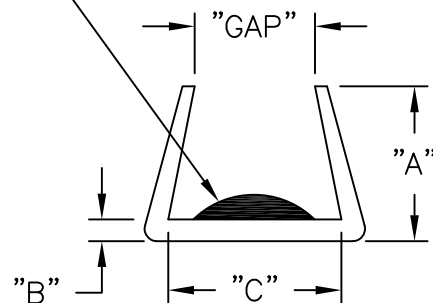

SERRATED GROMMETS ONLY

NOTES:

- COLOR: NATURAL OR BLACK;
ADD SUFFIX "B" FOR BLACK
- LENGTH: 100 FT. (3048 cm)

TITLE: GROMMET STRIP W/ADHESIVE					DWG IN IN (MM)			
M	SEE CO 200633 FOR CHANGES	SK 03.04.11	TOLERANCES UNLESS NOTED .XX=±.020 .XXX=±.015 FRAC=±1/32 ANG=±1°	FILE # NGSG	DWN: MO	APP:	FINAL	
L	SEE CO 200604 FOR CHANGES	SK 12.01.10		MAT'L: SEE NOTES	DT: 1/4/99	DT:	PART #	
K	RMS-21 CHANGED TO RMS-88,CO 200536	DK 06.02.10		RE: RICHCO, INC. RICHCO INC. PO BOX 804238,CHICAGO,60680 (773) 539-4060		SEE TABLE		PRINT TYPE CA
J	SEE CO 200035 FOR CHANGES	SK 09.26.07						
I	SEE ECN #1087	SK 10.26.05						
-	SEE ENGINEERING FOR REV. A - H	-						
REV	DESCRIPTION	ENGR DATE						

TOLERANCES
UNLESS NOTED
.XX=±.020
.XXX=±.015
FRAC=±1/32
ANG=±1°

FILE # NGSG
MAT'L: SEE NOTES
RE: RICHCO, INC.

DWN: MO
DT: 1/4/99
APP:
DT:
RICHCO INC.
PO BOX 804238, CHICAGO, 60680
(773) 539-4060