


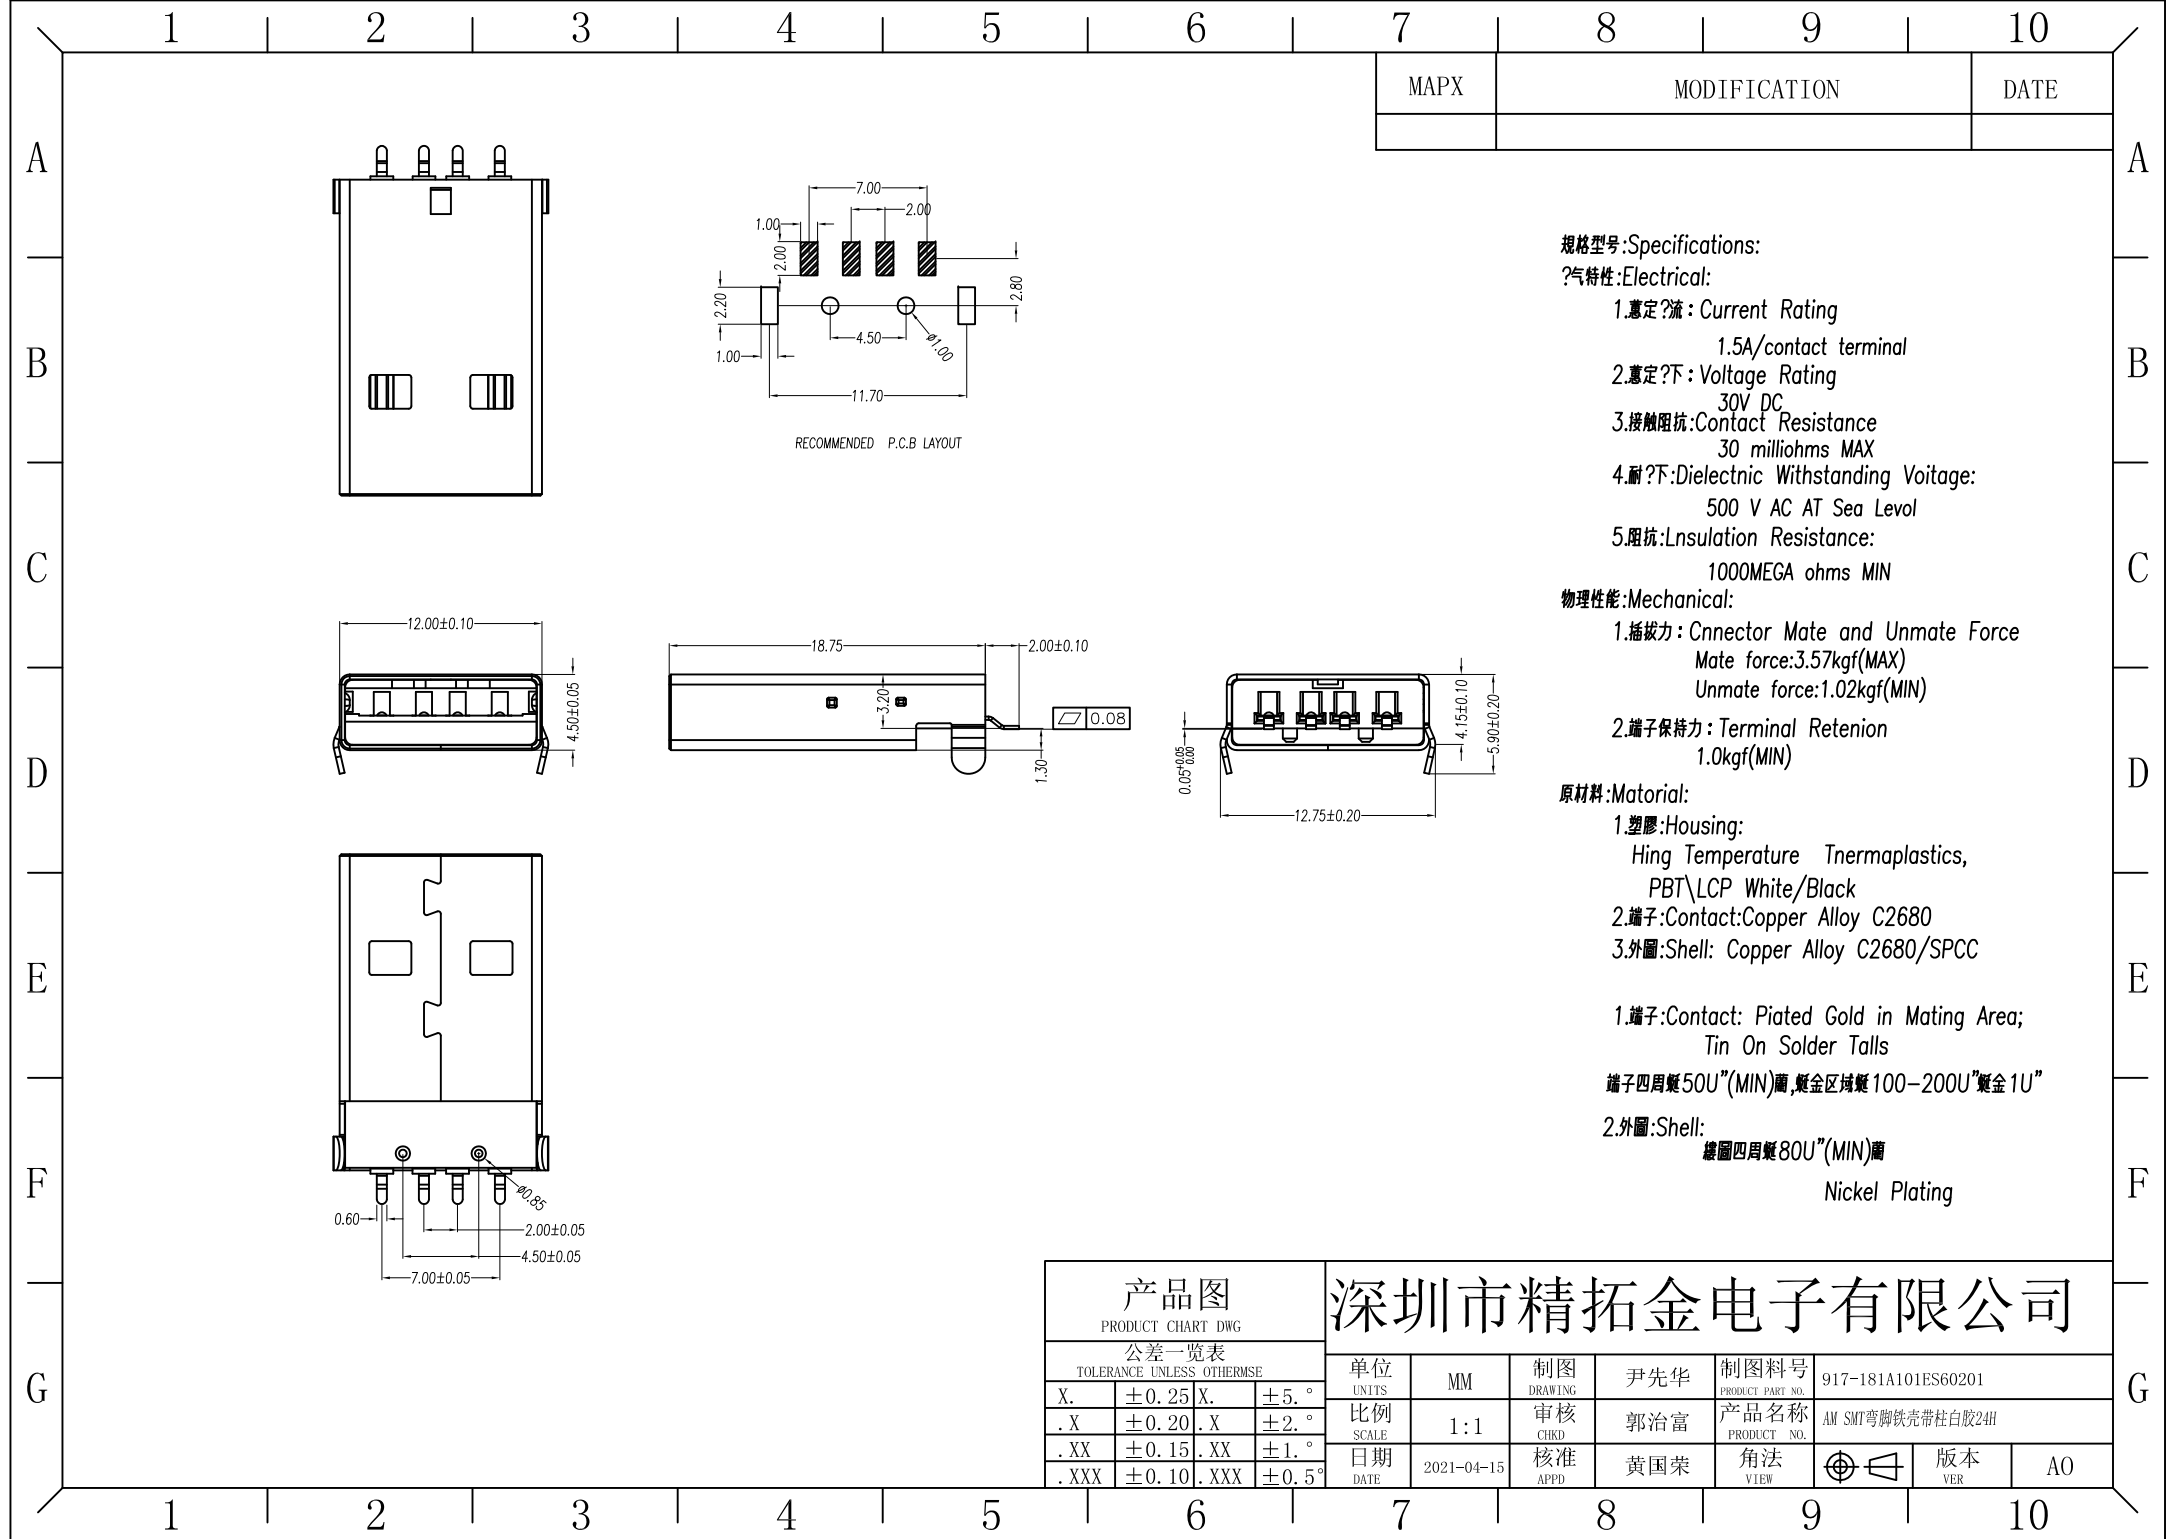

规格型号:Specifications:
?气特性:Electrical:
1.惠定?流: Current Rating
1.5A/contact terminal
2.惠定?下: Voltage Rating
30V DC
3.接触阻抗:Contact Resistance
30 milliohms MAX
4.耐?下:Dielectric Withstanding Voitage:
500 V AC AT Sea Level
5.阻抗:Lnsulation Resistance:
1000MEGA ohms MIN
物理性能:Mechanical:
1.插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
2.端子保持力: Terminal Retenion
1.0kgf(MIN)
原材料:Material:
1.塑膠:Housing:
Hing Temperature Tnermaplastics,
PBT\LCP White/Black
2.端子:Contact:Copper Alloy C2680
3.外圖:Shell: Copper Alloy C2680/SPCC

1.端子:Contact: Plated Gold in Mating Area;
Tin On Solder Tails
端子四周鍍50U”(MIN)圖,鍍金区域鍍100–200U”鍍金1U”
2.外圖:Shell:
鍍圖四周鍍80U”(MIN)圖
Nickel Plating

产品图				深圳市精拓金电子有限公司							
PRODUCT CHART DWG				单位	MM	制图	尹先华	制图料号	917-181A101ES60201		
公差一览表				UNITS		DRAWING		PRODUCT PART NO.			
TOLERANCE UNLESS OTHERWISE				比例	1:1	审核	郭治富	产品名称	AM SMT弯脚铁壳带柱白胶24H		
				SCALE		CHKD		PRODUCT NO.			
				日期	2021-04-15	核准	黄国荣	角法			
				DATE		APPD		VIEW	版本	VER	AO
X.	±0.25	X.	±5.°								
.X	±0.20	.X	±2.°								
.XX	±0.15	.XX	±1.°								
.XXX	±0.10	.XXX	±0.5°								