


IND CONDUCTIVITY HYG ASE-V



FCM

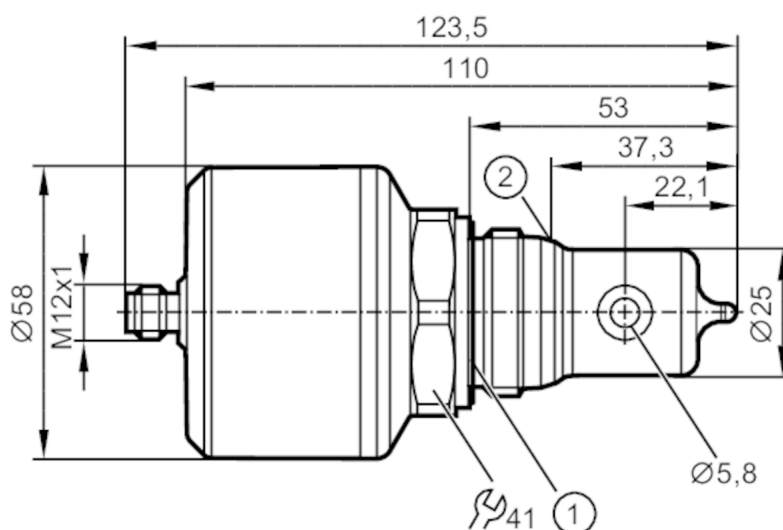

IO-Link



LDL200



Inductive conductivity sensor

IND CONDUCTIVITY HYG ASF-V

Outputs			
Total number of outputs		1	
Output signal		analogue signal; IO-Link	
Output function		analogue output; scalable; selectable conductivity / temperature	
Number of analogue outputs		1	
Analogue current output [mA]		4...20	
Max. load [Ω]		500	
Measuring/setting range			
Conductivity measurement			
Measuring range [μS/cm]		100...1000000	
Resolution [μS/cm]		0...10.000	1
		10.000...100.000	10
		100.000...1.000.000	100
Temperature measurement			
Measuring range [°C]		-25...150	
Accuracy / deviations			
Conductivity measurement			
Accuracy (in the measuring range)		2 % MW ± 25 μS/cm	
Drift [%/K]		0,1 %/K MW ± 25 μS/cm	
Repeatability		1 % MW ± 25 μS/cm	
Long-term stability		0,5 % MW ± 25 μS/cm	
Temperature measurement			
Accuracy [K]		20...50 °C: < ± 0,2 K; -25...150 °C: < ± 1,5 K	
Repeatability [K]		0,2	
Resolution [K]		0.1	
Response times			
Conductivity measurement			
Response time [s]		< 2; (T09; Damping = 0)	
Temperature measurement			
Response time [s]		< 40; (T09)	
Interfaces			
Communication interface		IO-Link	
Transmission type		COM2 (38,4 kBaud)	
IO-Link revision		1.1	
SDCI standard		IEC 61131-9	
Profiles		Measuring Sensor, Identification and Diagnosis	
SIO mode		no	
Required master port type		A	
Process data analogue		1	
Min. process cycle time [ms]		5.6	
Supported DeviceIDs		Type of operation	DeviceID
		default	922

LDL200



Inductive conductivity sensor

IND CONDUCTIVITY HYG ASF-V


Operating conditions		
Ambient temperature	[°C]	-40...60
Storage temperature	[°C]	-40...85
Protection		IP 68; IP 69K; (7 days / 3 m water depth / 0.3 bar: IP 68)
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	129
Mechanical data		
Weight	[g]	692.6
Materials		stainless steel (316L/1.4404); PEEK; PEI; FKM
Materials (wetted parts)		PEEK
Process connection		G 1 external thread Aseptoflex Vario
Remarks		
Remarks		MW = measured value
Notes		Digital meets analogue: integrating modern IO-Link sensors the analogue way. The EIO104 allows you to realise two analogue signals from intelligent IO-Link sensors with several process values.
Pack quantity		1 pcs.
Electrical connection		
Connector: 1 x M12 (EN 61067-2-101); coding: A; Contacts: gold-plated		
		



Inductive conductivity sensor

IND CONDUCTIVITY HYG ASF-V

Connection

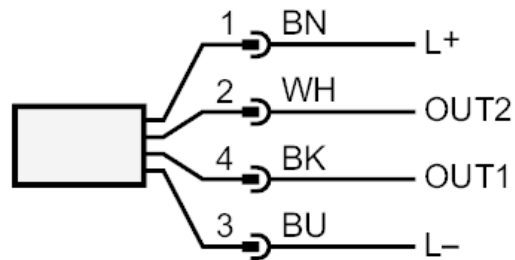

OUT1	IO-Link
OUT2	analogue output
	colours to DIN EN 60947-5-2
	Core colours :
BK =	black
BN =	brown
BU =	blue
WH =	white