


REL NO. 48536-381		REVISIONS		
CHG NO.	SYM	DESCRIPTION	DATE	APPROVED
	A ₁			
56525-75	A ₂	WAS .098+.004-.000	1-6-75 Randall	KL Hayes
70397-5	B	(CLII) WAS 9-2335, 9-2357, SEE NOTES 3 & 4 (PRCS SPEC BLK); REM NOTE 4	9-4-79 P. Wilkinson	C Bowker

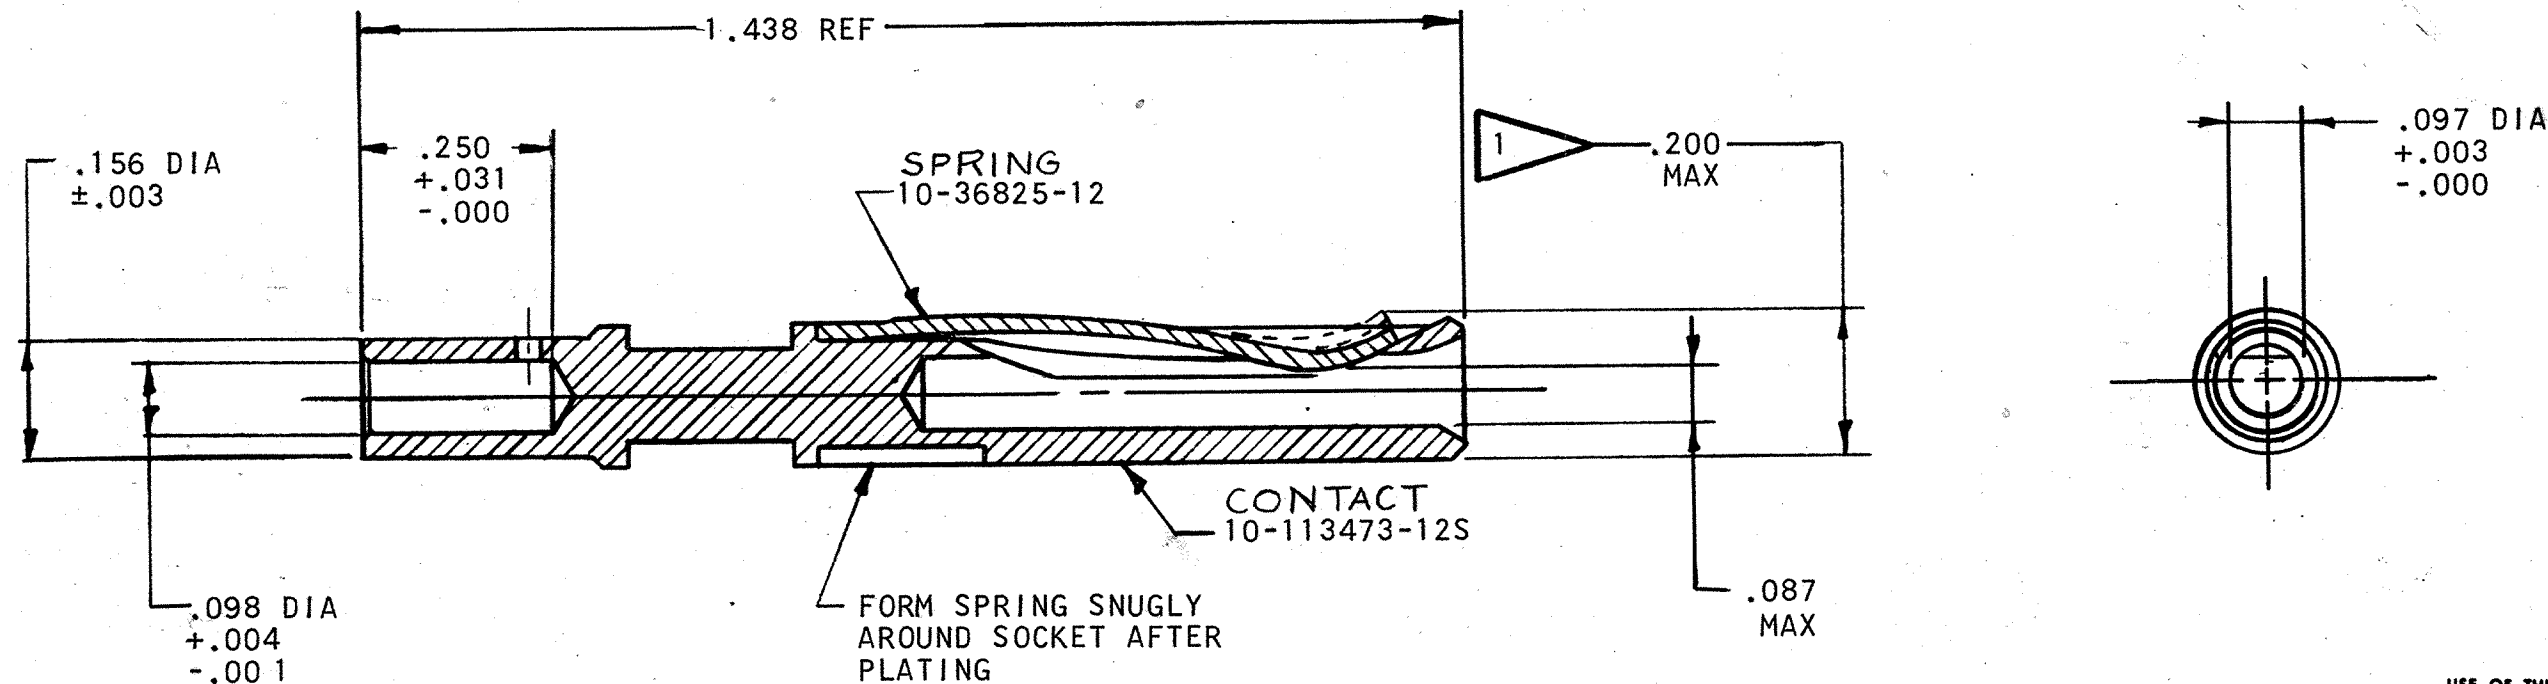

USE OF THIS DOCUMENT IS UNLIMITED. DOCUMENTS REFERENCED HEREON CONTAIN LIMITED RIGHTS DATA.

4.

3. MEAN SURFACE AREA 1.027 SQ IN.

2. A .0930+.0002-.0000 DIA STEEL PIN MUST ENGAGE & DISENGAGE SOCKET WITH A FORCE NOT GREATER THAN 2.5 LB & NOT LESS THAN .5 LB. PIN TO HAVE A FINISH OF 3/ & ENGAGE .594.

1. THIS DIMENSION TO BE .200 MAX OVER END OF SPRING WHEN A .0950+.0002-.0000 DIA PIN IS ENGAGED WITH SOCKET.

NOTES: REF SYMBOL



ITEM NO.	QTY REQD	DESCRIPTION	PART NUMBER	CODE IDENT	ZONE
10-470640/59 & OTHERS					
NEXT ASSEMBLY					
PARTS LIST					
UNLESS OTHERWISE SPECIFIED		DRAWN: AXTELL		DATE: 8-21-68	
LINEAR DIMENSIONS ARE IN INCHES. TOLERANCES: 3 PLACES ±.010; 2 PLACES ±.03; 1 PLACE ±.1; ANGLES ± 2°. OTHER STANDARDS PER SCINTILLA SPEC 9-3800 AND MIL-STD 8.		CHECKED: Baydon		DATE: 8-26-68	
MATERIAL SPEC		MATERIAL: Pomeroy 8-26-68		TITLE:	
PROCESS SPEC		STANDARDS: Baydon		CONTACT, SOCKET, ELECTRICAL CONNECTOR, SIZE 12, SOLDERLESS, ASSEMBLY OF	
9-6800-4 SEE NOTE 3		DRAFTING: [Signature]		CODE IDENT NO. 77820	
		ENGINEERING: [Signature]		SIZE B	
		DEVELOPMENT: R. W. Tyler		10-229193-124	
		SCALE 4/1		WT	
		REF 10-40560		SHEET	

SCINTILLA DIVISION
SIDNEY, NEW YORK, U.S.A.

THE Bendix CORPORATION

R