
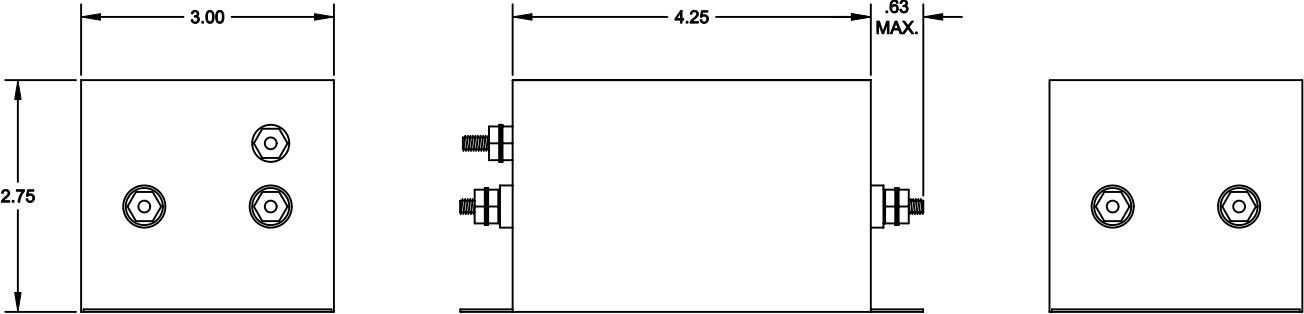


SPECIFICATIONS


- 1. CASE:
22 GA. (.030) CRS, TIN PLATED
- 2. RATED CURRENT:
5A
- 3. RATED VOLTAGE:
250VAC, 50/60Hz
125VAC, 400Hz
- 4. TEST VOLTAGE:
LINE TO LINE: 1.2KVDC
LINE TO GROUND: 2.2KVDC
- 5. LEAKAGE CURRENT:
1.8mA @ 250VAC, 50Hz
- 6. WEIGHT: 3.15LB

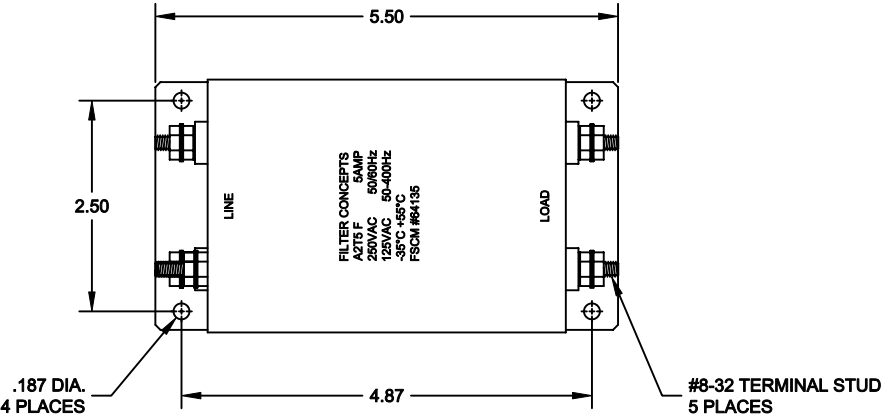

INSERTION LOSS (50Ω TYPICAL)

	.02 MHz	.05 MHz	.15 MHz	1.5 MHz	5.0 MHz	50 MHz
L/L	20 db	40 db	65 db	65 db	65 db	60 db
L/G	30 db	60 db	65 db	65 db	65 db	50 db

SCHEMATIC



NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± XXX ±.010	CONTRACT NO.	
	APPROVALS	DATE
	DRAWN MG	10-25-90
	CHECKED	
MATERIAL		
FINISH		

FILTER CONCEPTS INC.		
APPLICATION DRAWING A2T5 F FILTER		
SIZE B	CODE IDENT NO.	DRAWING NO. 7147
SCALE 2/3		SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Astrodyne TDI:](#)

[A2T5 F](#)