
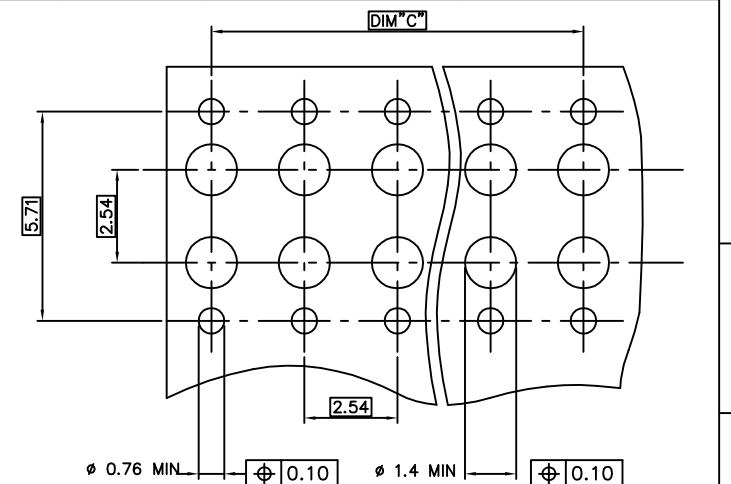


CONTACT PLACED IN CAVITY (ACCORDING TO "F" VIEW)																			
X	X	X				X	X	X	X	X	X	X	X				X	X	X
X	X	X				X	X	X	X	X	X	X	X				X	X	X
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20

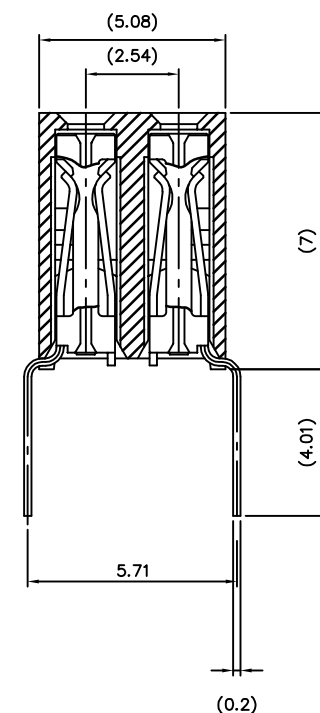

NOTES:

- 1 - MATERIAL HOUSING: THERMOPLASTIC POLYESTER 30% GLASS FILLED, COLOUR BLUE.
FLAME RETARDANT PER UL-94 CATEGORY VO.
- 2 - MATERIAL TERMINAL: PHOSPHOR BRONZE EXTRA HARD.
- 3 - MATERIAL HOUSING VERSION HIGH TEMPERATURE:
PCT 30% GLASS FILLED, COLOUR GREY.
FLAME RETARDANT PER UL-94 CATEGORY VO.
- 4 - THE DASH "H" AT THE END OF THE P/N
TO INDICATE A HIGH TEMPERATURE HOUSING.
- 5 - CONNECTOR MEANT TO BE USED FOR PC BOARD
WITH NONE PLATED THROUGH HOLES.
- 6 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE,
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.
 - b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C ±5°C SOLDER BATH TEMPERATURE FOR
5 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - c - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - d - LEGAL STATEMENT: SEE GS-47-0004
- 7 - END STAND-OFFS FOR 2x2 UP TO 2x4 POS
NO END STAND-OFFS FOR 2x5 UP TO 2x50 POS

mat'l. code SEE NOTES				surface ISO 1302		tolerance ISO 406 ISO 1001		projection 10:1		product family DX VCC DR	
ltr	ecn no	dr	date	tolerances unless otherwise specified		angles		mm		title	
H	F11-0043	JCO	12.02.22	linear		±0.3				DUAL ENTRY	
J	B-19124	AMA	14.10.21							OFF SET LEGS 5.71mm	
K	F-24429	AMA	18.07.01	±2°				scale 10:1		dwg no	
			dr	P.NIZZI		06.05.29				sheet 1 of 1	
			eng	J.M.PHAWAN		06.05.29				size	
			chr	P.NIZZI		06.05.29				A2	
			app	J.M.P		06.05.29				type	
			revision sheet							CUSTOMER Drawing	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[95257-301HLF](#)