

Tyco/Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: RXE375

DOCUMENT: SCD 21875
 PCN: 229579
 REV LETTER: I
 REV DATE: JANUARY 3, 2002
 PAGE NO.: 1 OF 1

Specification Status: RELEASED

Electrical Rating

Voltage: 72V MAX
Current: 40A MAX

Insulating Material:
 Cured, Flame Retarded Epoxy Polymer
 meets UL94 V-0 Requirements

Lead Material:
 20 AWG Tin Lead Plated Copper

Marking:

Raychem Logo and Voltage
 X 72
 X 375 — Part Identification
 □□□□ — Lot Identification
 (can be on back)

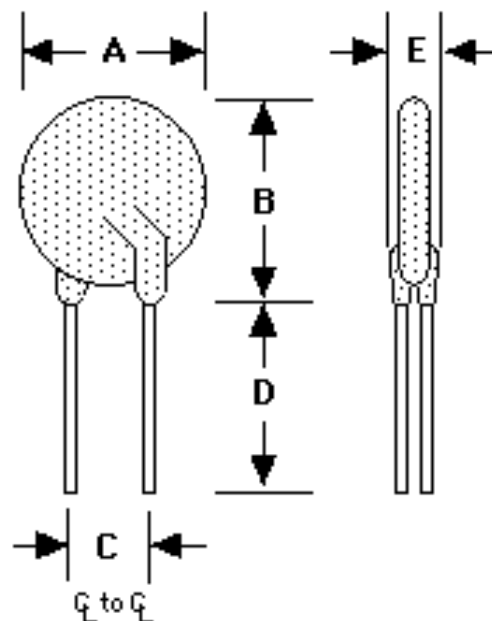


TABLE I. DIMENSIONS:

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	27.2	--	31.8	9.4	10.9	7.6	--	--	3.0
in*:	--	(1.07)	--	(1.25)	(0.37)	(0.43)	(0.30)	--	--	(0.12)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I _H RATED CURRENT	CURRENT RATINGS							TIME TO TRIP	INITIAL RESISTANCE VALUES		ONE-HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED- STATE POWER DISSIPATION
	AMPERES 20°C HOLD	AMPERES AT 0°C HOLD	AMPERES AT 0°C TRIP	AMPERES AT 20°C HOLD	AMPERES AT 20°C TRIP	AMPERES AT 60°C HOLD	AMPERES AT 60°C TRIP		OHMS AT 20°C MIN	OHMS AT 20°C MAX		
3.75		4.50	9.00	3.75	7.50	2.44	4.88	24.0	0.03	0.05	0.08	3.2

Recognitions: UL, CSA and TUV approved.
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.