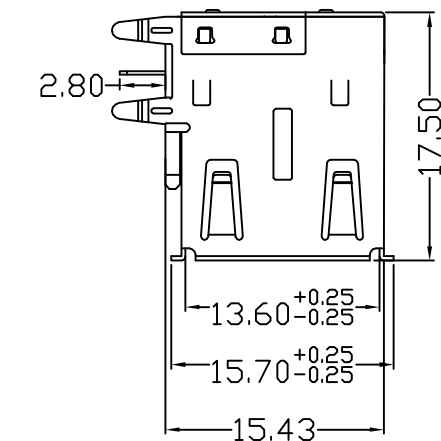


规格说明:Specifications:

电气特性:Electrical:


1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.0kgf (MIN)

原材料:Material:

1. 塑胶: Housing:
Hing Temperature Thermoplastics,
PBT White/Black
2. 端子: Contact: Copper Alloy C2680
Plated Gold in Mating Area;
Tin On Solder Tails
3. 外壳: Shell: Copper Alloy SPCC
Nickel Plating

 深圳市万骏达电子有限公司 http://www.wanjunda.com	图号 (DWG NO)		单位 (UNIT): MM
	版本 (REV)		比例 (SCALE) 1:1
品名 (ITEM NO)	USB A母双层有后盖弯角(15.4)有边	口期 (DATE)	
料号 (PART NO)	2USB2.0-AF-WCS-JB-17.5	设计 (DESIGN)	未注公差 TOLERANCE UNSPECIFIED
模号 (MODEL NO)		审核 (CHECKED)	X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X° ±5° X.X° ±2°
		核准 (APPROVED)	