

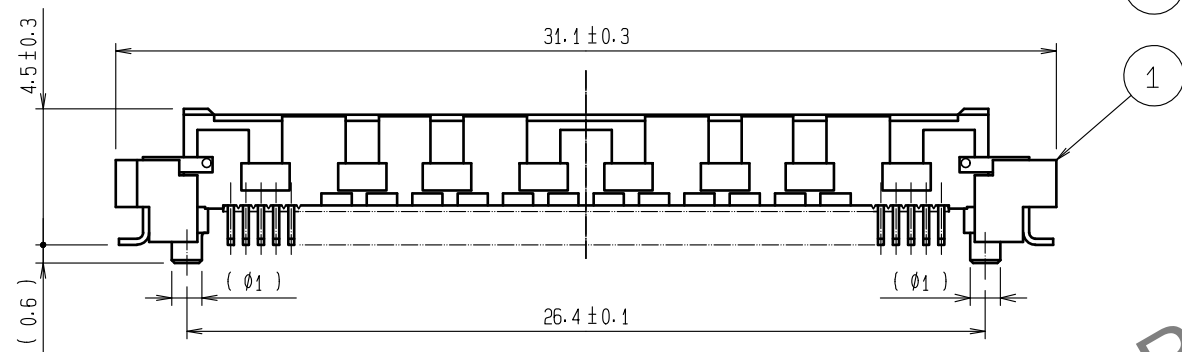


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

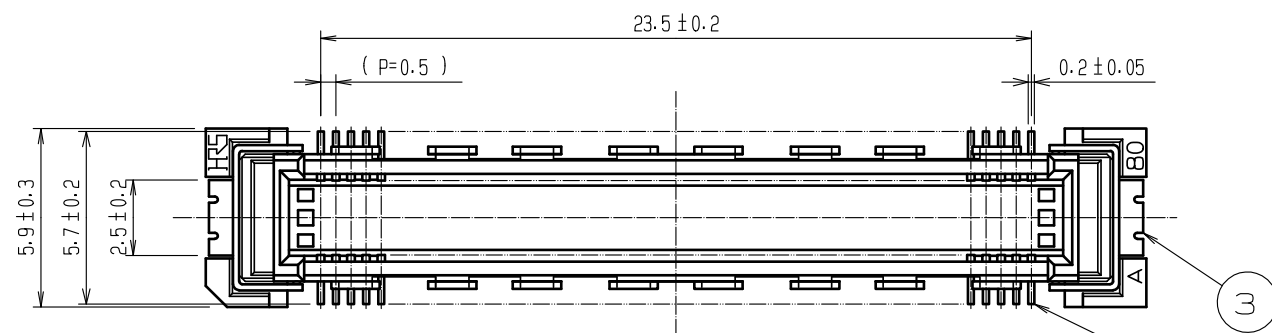


RECOMMENDED LAND PATTERN

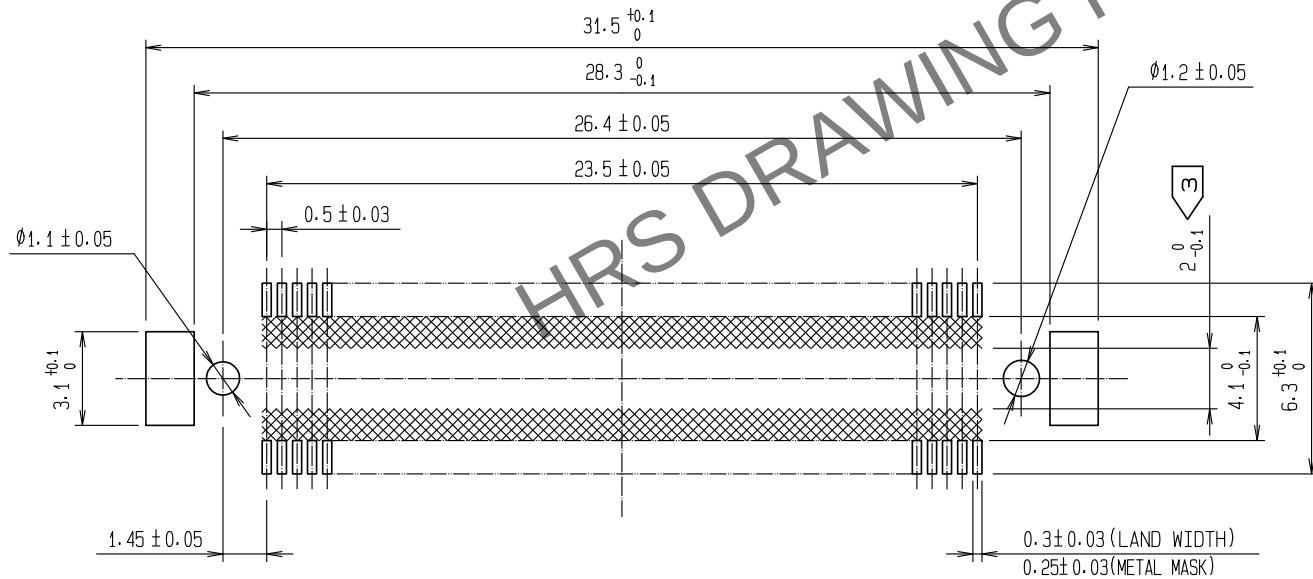


NOTES

- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
- 2 THIS PRODUCT HAS NO POLARITY TO MOUNT ON THE RECOMMENDED LAND PATTERN.
- 3 NO PATTERN SHALL BE DESIGNED IN THIS AREA , TO PREVENT CONTACTS FROM BEING TOUCHED WITH PATTERN.
- 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

CROSS-CUT SECTION (10:1) ¹

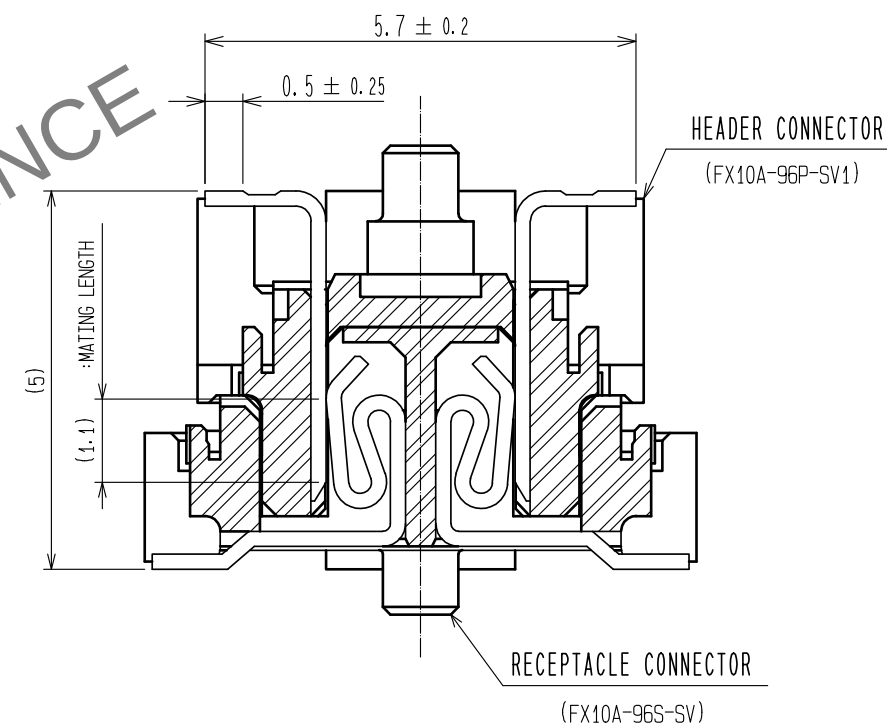

				3		PHOSPHOR BRONZE	TIN-PLATING			
				2		PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min.			
							LEAD AREA : TIN-PLATING 1μm min.			
							UNDER PLATING : NICKEL 1μm min.			
1	LCP		BEIGE		UL94V-0					
NO.	MATERIAL		FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS			
UNITS mm			SCALE 4 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00012901		DESIGNED SY. KUDO	CHECKED HT. YAMAGUCHI	DATE 20220218
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		20060418		DRAWING NO. EDC3-151968-25				
		CHECKED : HS. OZAWA		20060418		PART NO. FX10A-96P-SV1(71)				
		DESIGNED : KT. DOI		20060417		CODE NO. CL0570-0141-4-71				
		DRAWN : KT. DOI		20060417		 				