

A

B




C

D

E

F

G

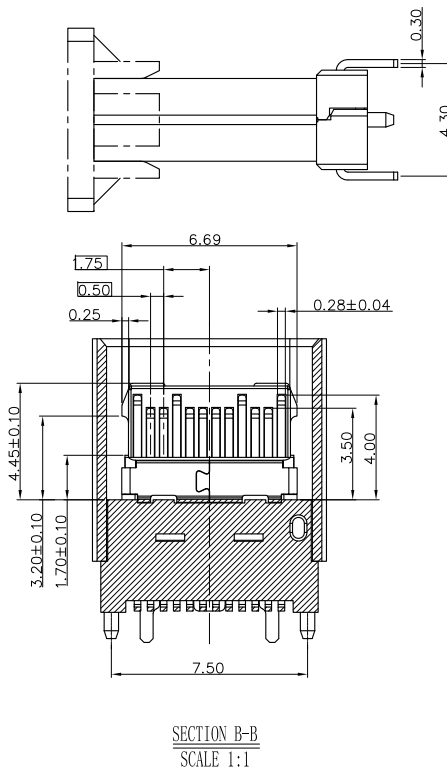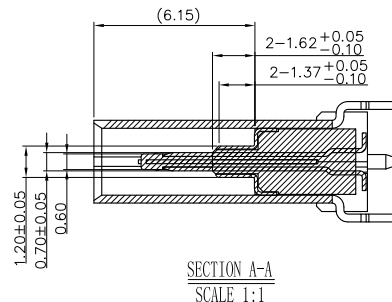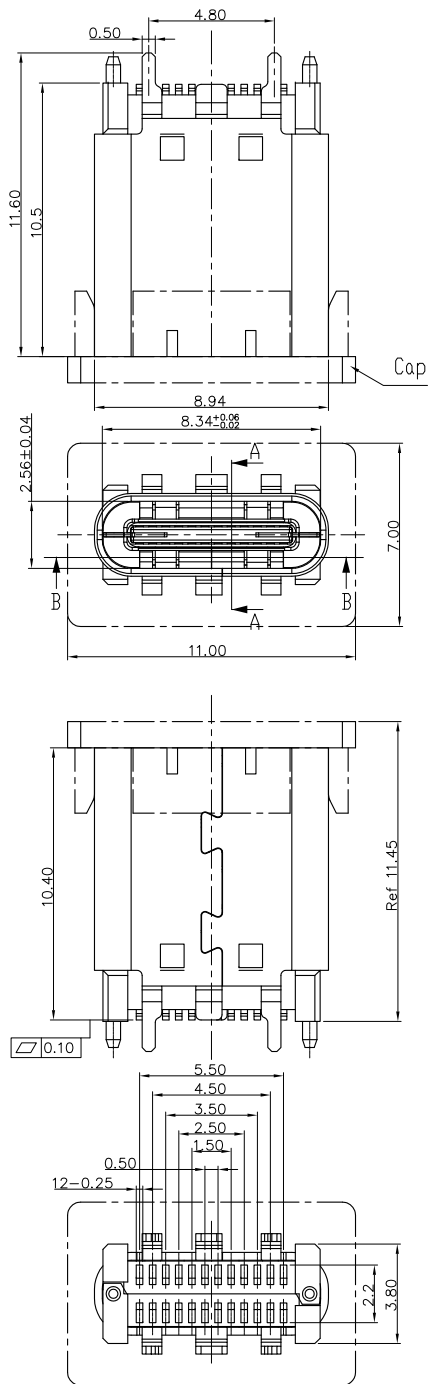

MAPX

MODIFICATION

DATE

NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0

CONTACT: COPPER ALLOY.

GOLD PLATED 30u" Min ON CONTACT AREA, 100u"

Min TIN (LEAD FREE) ON SOLDER AREA,

SHELL: SUS304-H, T=0.30±0.03mm

50u" NICKEL PLATING OVER ALL.

SHIELD: SUS304-H, T=0.12±0.03mm

2.MECHANICAL:

INSERTION: 5~20N.

EXTRACTION: 8~20N.

DURABILITY: 10000 CYCLES

3.ELECTRICAL:

CURRENT: 5A MIN FOR VBUS;

0.25A MIN FOR OTHER.

VOLTAGE: 5VAC MAX

WITHSTANDING VOLTAGE: 100V AC.

CONTACT RESISTANCE: 40mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL

TEMPERATURE RANGE -55°C ~ +85°C

产品图

PRODUCT CHART DWG


公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	918-418K2022Y40003
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	TYPE-C3.1母座无边180度贴片10.5LCP黑胶24PIN
日期 DATE	2014.05.15	核准 APPD		角法 VIEW	版本 VER
					AO

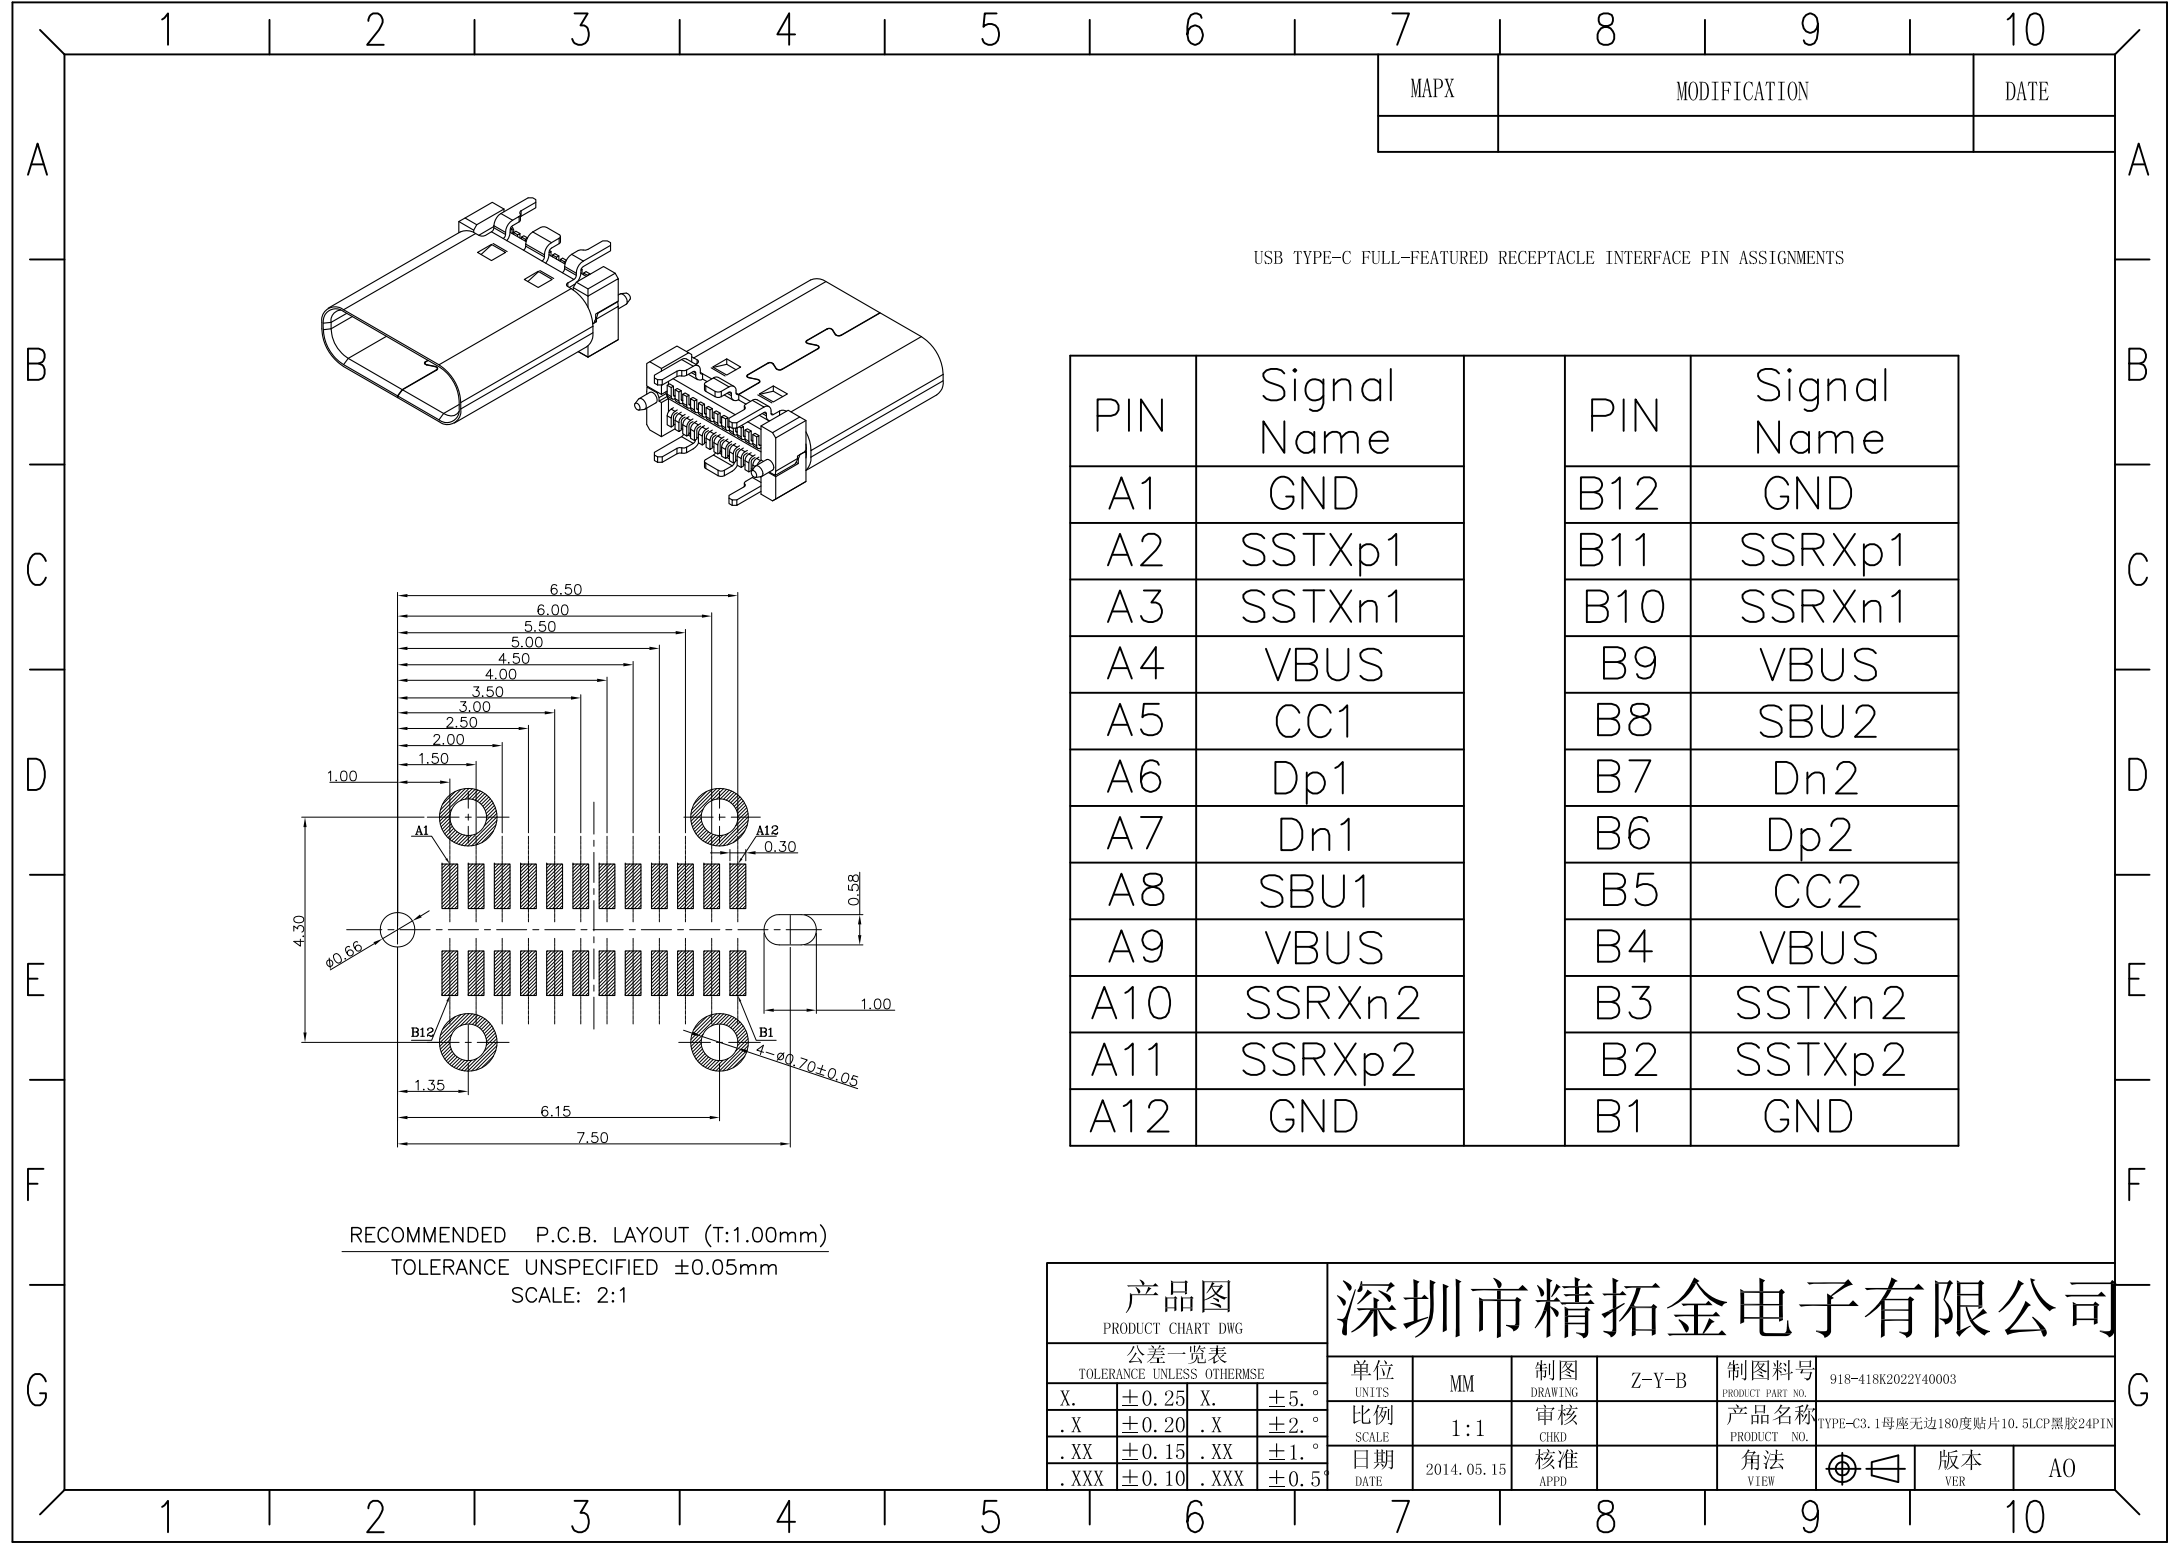


MAPX	MODIFICATION	DATE

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS


PIN	Signal Name		PIN	Signal Name
A1	GND		B12	GND
A2	SSTXp1		B11	SSRXp1
A3	SSTXn1		B10	SSRXn1
A4	VBUS		B9	VBUS
A5	CC1		B8	SBU2
A6	Dp1		B7	Dn2
A7	Dn1		B6	Dp2
A8	SBU1		B5	CC2
A9	VBUS		B4	VBUS
A10	SSRXn2		B3	SSTXn2
A11	SSRXp2		B2	SSTXp2
A12	GND		B1	GND

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm
SCALE: 2:1

产品图 PRODUCT CHART DWG		深圳市精拓金电子有限公司							
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	918-418K2022Y40003		
X.	±0.25	X.	±5.°	比例 SCALE	1:1	审核 CHKD	产品名称 PRODUCT NO.	TYPE-C3.1母座无边180度贴片10. 5LCP黑胶24PIN	
.X	±0.20	.X	±2.°	日期 DATE	2014. 05. 15	核准 APPD	角法 VIEW	版本 VER	AO
.XX	±0.15	.XX	±1.°						
.XXX	±0.10	.XXX	±0.5°						

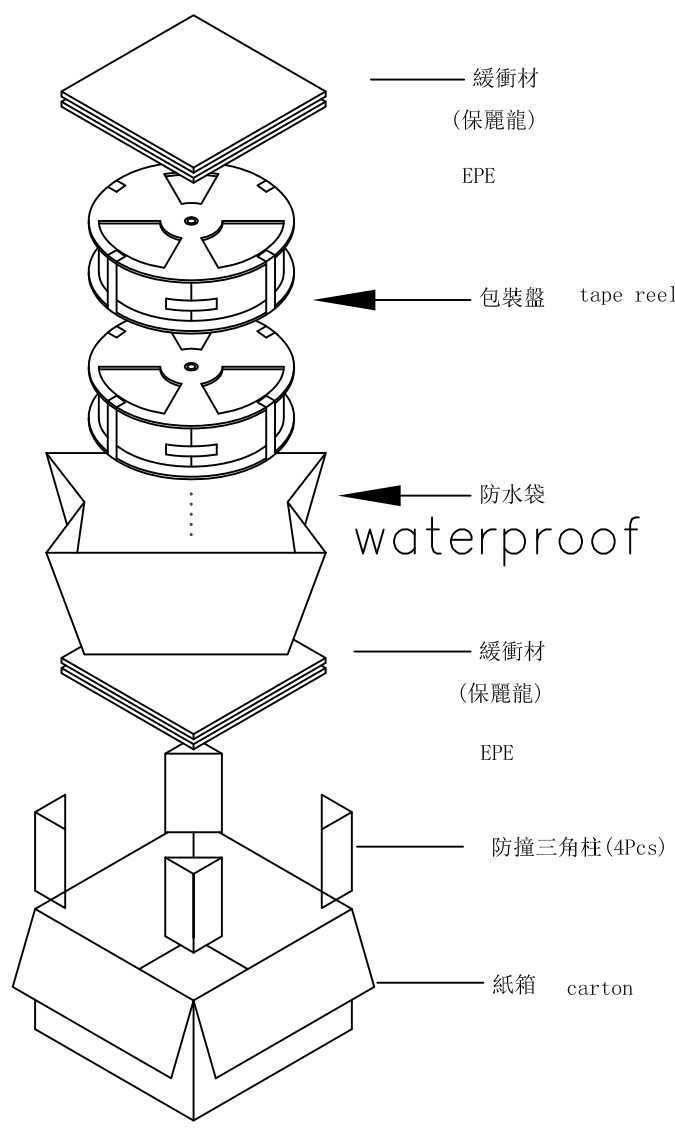

at small positioning hole of the carrier tape side).
標籤黏貼處 (朝捲裝包材的小定位孔一側)
Location of label sticking (label

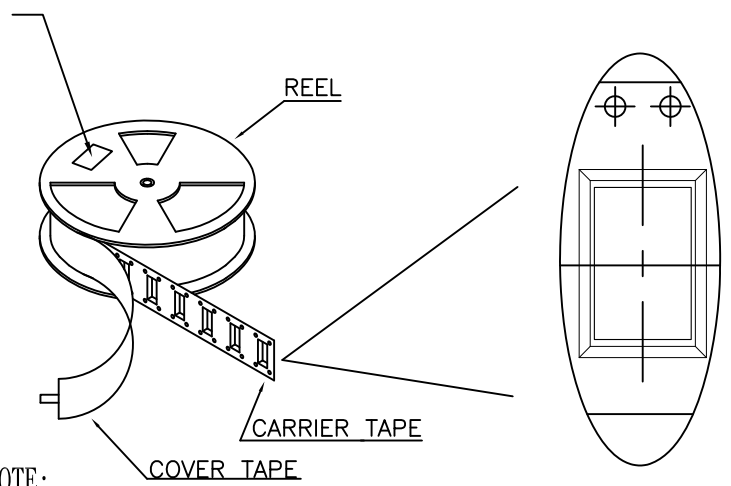

- NOTE:
1. 潘 婦規 講摯藩眊規眊 講 xó恒桶跡.
{Packing q'ty of each reel & carton as below
{table shown.
 2. 眊舂糯 葡企恒婦規 ?婦規 婦規
Use cover tape to cover and hot melt
machine to seal up.
 3. 藩??眊溫??逆紮證
Every carton use 2pcs EPE.
 4. 規 家 腔橙屨溫 ?眊甜眊糯 猾諸
Put reels in the carton and use
adhesive tape to seal up.

家 躑? (PRODUCT No.)	婦 規 講 (PACKING CAPACITY)			零 講 WEIGHT (Kg)		
	PCS/REEL	REELS/CARTON	PCS/CARTON	N.W./PCS	N.W./BOX	G.W./BOX
FUCR-244X-14XR	400	7	2800			

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	918-418K2022Y40003
X.	±0.25	X.	±5.°	比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	TYPE-C3.1母座无边180度贴片10.5LCP黑胶24PIN
.X	±0.20	.X	±2.°	日期 DATE	2014.05.15	核准 APPD		角法 VIEW	
.XX	±0.15	.XX	±1.°					版本 VER	AO
.XXX	±0.10	.XXX	±0.5°						