


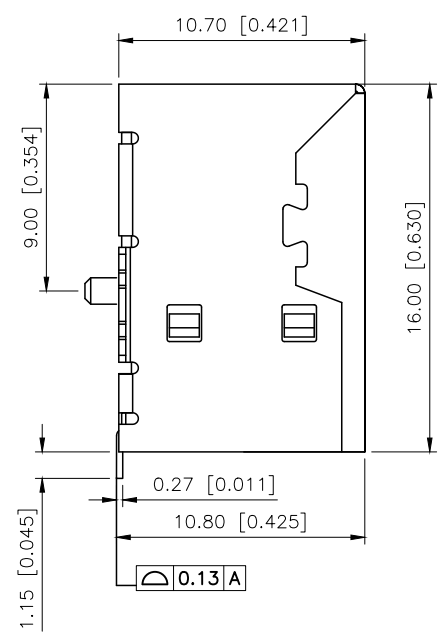
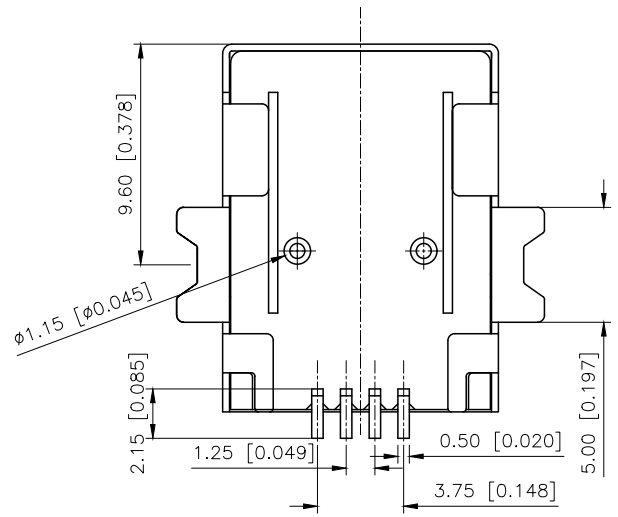


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.05.06	阿树

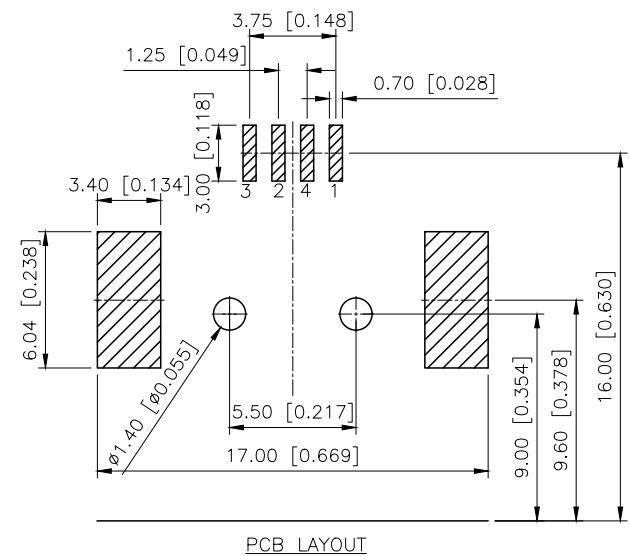

Specifications:
Current Rating:1.0A AC,DC
Voltage Rating:30V AC,DC
Contact Resistance:30m Ohm Max
Insulation Resistance:1,000M Ohm Min
Withstanding Voltage:500V AC/Minute
Operating Temperature Range:-40°C to +105°C
Materials:
Insulator:Nylon 9T UL94V-0, COLRO: Nature
Contact:Phosphor Bronze
Plating: Au Plated on Contact Area,
Tin Plated on Solder Tail.
Ni Plated on Under overall.
Shell:Brass, Nickel Plated

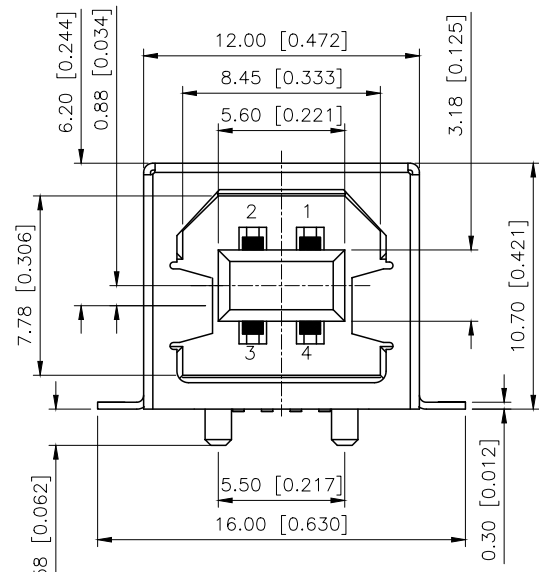

U241-04XN-2XS1-002
1:Au 1U" MIN
2:Au 15U" MIN
3:Au 30U" MIN
1:PBT
2:LCP
3:PA
1:WITH
2:WITHOUT
B:BLACK
U:BLUE
W:WHITE
C:CREAM-COLOR

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	USB 2.0
CHECKED		UNIT:	mm/in	PART NO.:	U241-04XN-2XS1-002
APPROVED		SIZE:	A4	DWG NO.:	