



PennEngineering
Corporate Headquarters – Danboro, PA

5190 Old Easton Rd.

Danboro, PA 18916

Phone: 215-766-8853

Toll-Free Phone: 1-800-237-4736 (U.S. only)


Email: info@pemnet.com

Website: www.pemnet.com

Part # SL-0518-2ZI, TRI-DENT® Locknuts - Type SL - Unified

Type SL self-locking nuts are designed with a unique and economical TRI-DENT® locking feature, which meets demanding locking performance requirements.

- 3 cycle locking performance. Achieved using steel socket head cap screws, 180 ksi / property

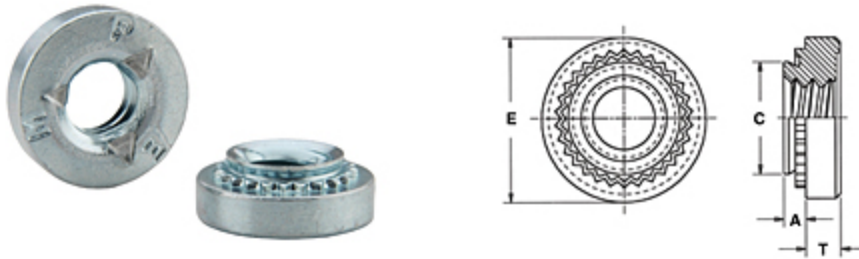


Specifications

Thread Size .313-18 (5/16-18)

Thread Code 0518

Shank Code 2

A (Shank) Max. .087 in



Min. Sheet Thickness .091 in

Hole Size in Sheet + .003 - .000 .413 in

C Max. .412 in

E ± .010 .500 in

T ± .010 .230 in

Min. Dist. Hole C/L to Edge .38 in

For Use in Sheet Hardness HRB 80 / HB 150 or less

Thread Specification Internal, ASME B1.1, 2B

Fastener Material Heat-Treated Carbon Steel

Standard Finish	Zinc plated per ASTM B633,	SC1 (5µm), Type III, colorless
CAD Supplier	PennEngineering® (PEM®)	