

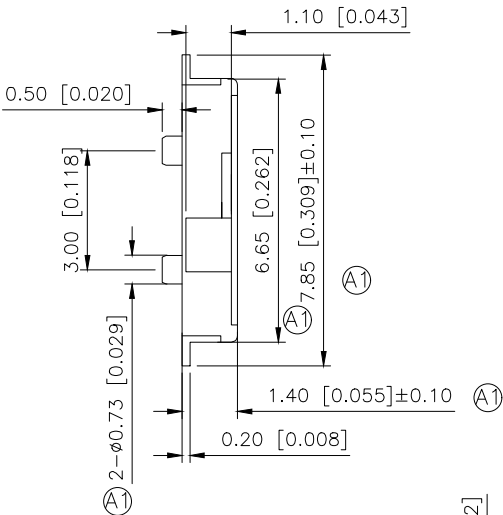
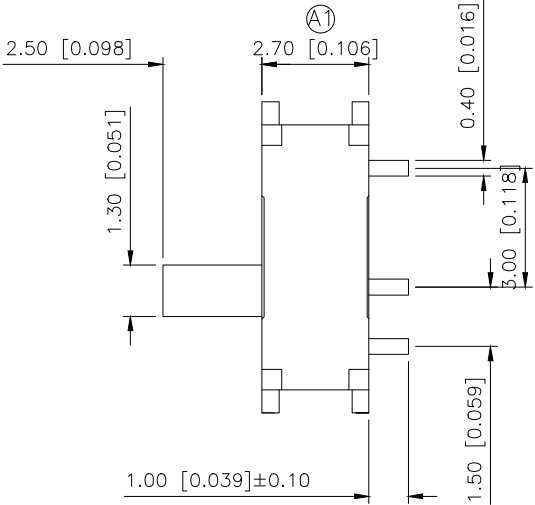


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	(A1)X5	脚位序号修正, 图面升级整理图面	2025.05.29	阿树

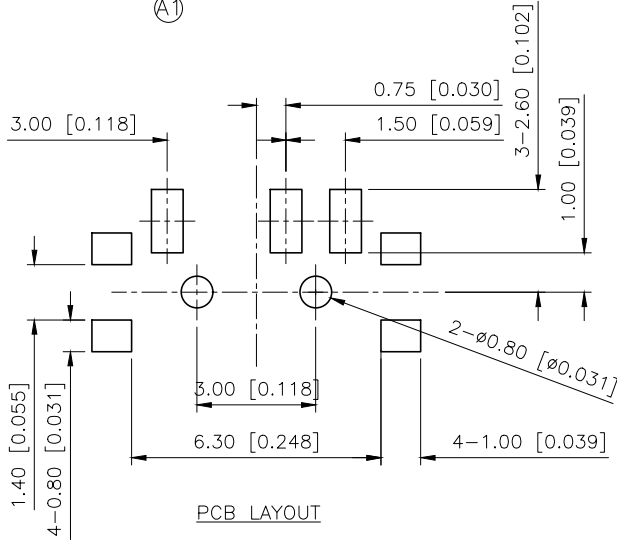

PAPT NO	L
SK-3296S-01-L1	1.5
SK-3296S-01-L2	2.0
SK-3296S-01-L3	2.5

耐电压 Rate voltage	250V AC1mA
绝缘电阻 Insulated resistance	100MΩ min(DC 250V)
接触电阻 Contact resistance	100mΩ min(DC 100V)
使用温度 Temperature range	-25℃~+70℃
寿命 life	10,000 cycles
操作力度: Operating force	250±100gf



5	Shrapnel	1	Sus	Grey
4	Contact spring	1	Beryllium bronze	silvery white
3	Cover	1	Brass	silvery white
2	Base	1	LCP	Ag Plated-Black
1	Push handle	1	PA46	Black/White
ITEM	PAPT NAME	QTY	MATERIAL	PLATED/COLOR

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	SLIDE SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	SK-3296S-01-X
APPROVED		SIZE:	A4	DWG NO.:	