


Part No	Pin	A	B	C	D	E
FPC-0.3FX-11PWBH10	11	4.80	2.40	3.00	3.65	4.30
FPC-0.3FX-13PWBH10	13	5.40	3.00	3.60	4.25	4.90
FPC-0.3FX-15PWBH10	15	6.00	3.60	4.20	4.85	5.50
FPC-0.3FX-17PWBH10	17	6.60	4.20	4.80	5.45	6.10
FPC-0.3FX-19PWBH10	19	7.20	4.80	5.40	6.05	6.70
FPC-0.3FX-21PWBH10	21	7.80	5.40	6.00	6.65	7.30
FPC-0.3FX-23PWBH10	23	8.40	6.00	6.60	7.25	7.90
FPC-0.3FX-25PWBH10	25	9.00	6.60	7.20	7.85	8.50
FPC-0.3FX-27PWBH10	27	9.60	7.20	7.80	8.45	9.10
FPC-0.3FX-29PWBH10	29	10.20	7.80	8.40	9.05	9.70
FPC-0.3FX-31PWBH10	31	10.80	8.40	9.00	9.65	10.30
FPC-0.3FX-33PWBH10	33	11.40	9.00	9.60	10.25	10.90
FPC-0.3FX-35PWBH10	35	12.00	9.60	10.20	10.85	11.50
FPC-0.3FX-37PWBH10	37	12.60	10.20	10.80	11.45	12.10
FPC-0.3FX-39PWBH10	39	13.20	10.80	11.40	12.05	12.70
FPC-0.3FX-41PWBH10	41	13.80	11.40	12.00	12.65	13.30
FPC-0.3FX-45PWBH10	45	15.00	12.60	13.20	13.85	14.50
FPC-0.3FX-49PWBH10	49	16.20	13.80	14.40	15.05	15.70
FPC-0.3FX-51PWBH10	51	16.80	14.40	15.00	15.65	16.30

Note:


- 1.Material
 - 1.1: Housing: LCP UL94-V0 Color:Natural.
 - 1.2: Actuator: High Temperture UL94-V0 Color:Black
 - 1.3: Contact: Phosphor Bronze.
 - 1.4: LEG: Phosphor Bronze.
- 2.Plating
 - 2.1: Contact: See Part Number.
 - 2.2: LEG: Matte Tin Plating Over Nickel.
- 3.Rating:
 - 3.1: Operating Voltage: 30V AC/DC.
 - 3.2: Current Rating: 0.2A AC/DC.
 - 3.3: Operating Temperature:-55°C~+85°C.

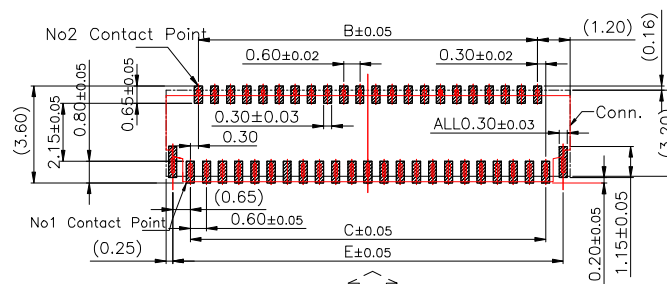



FPC/FFC Insert Direction
Recommended P.C.B Layout 

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:FPC 0.3Pitch 1.0H ZIF R/A Connector	
			PAR	FPC—0.3FX—NPWBH10
DWN				
CHKD				
APVD				
DECIMALS:	ANGLES:	SCALE1:1	UNIT:MM	
.X:±0.30	.X":±5°			
.XX:±0.20	.XX":±2°			
.XXX:±0.05	.XXX":±1°	CUSTOMER COPY	SIZE:A4	SHEET:1F1 REV:A


EMBOSED TAPE PACKING 0.3mm Pitch FPC Connector, ZIF R/A SMT Type

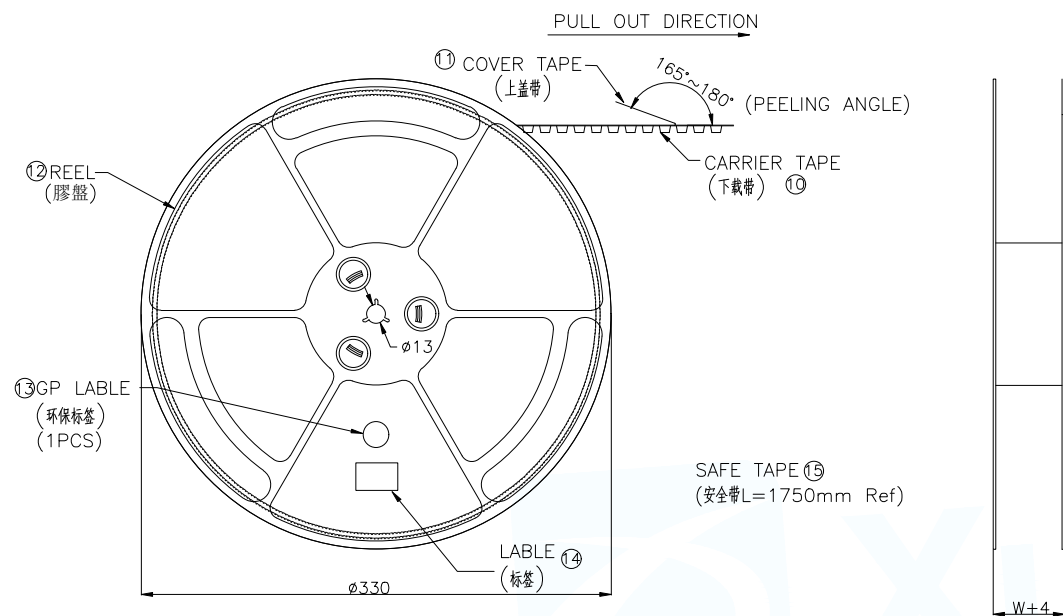

SCALE 1:4

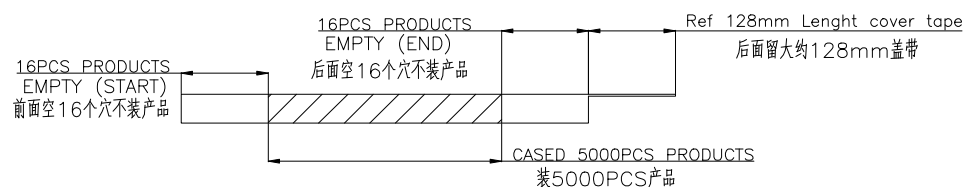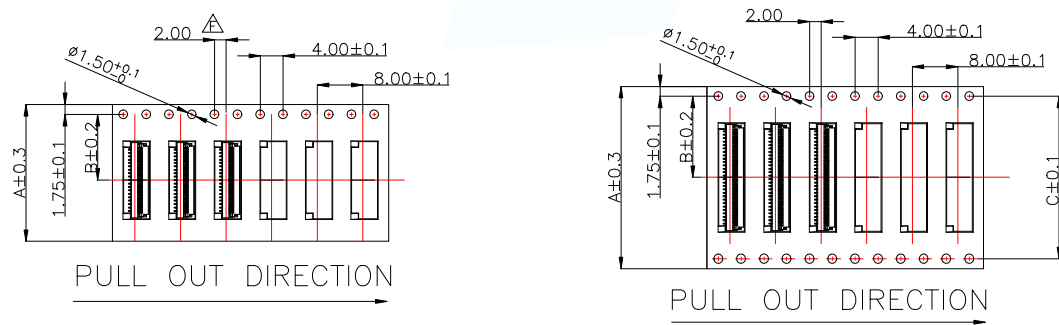

PIN NO.	W	A	B	C	PCS /REEL	REEL/CARTON	SUM(PCS)
13PIN~25PIN	20.5	16	7.50	—	5000	13	65000
27PIN~49PIN	28.5	24	11.5	—	5000	10	50000
51PIN~61PIN	36.5	32	14.2	28.4	5000	8	40000
67~73PIN	48.5	44	20.2	40.4	5000	6	30000

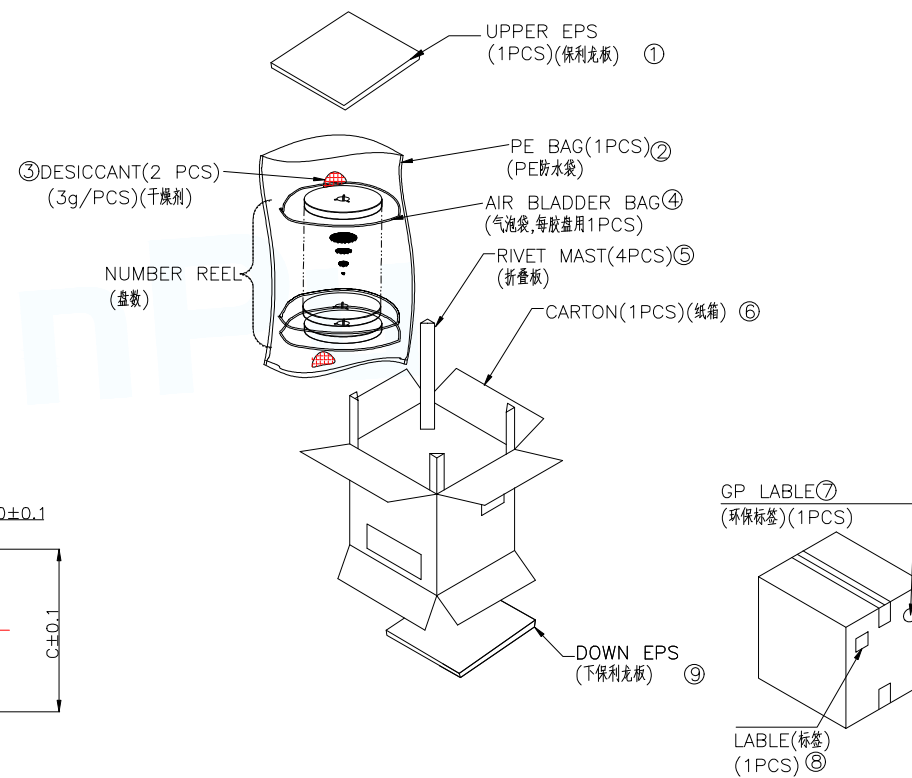

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:FPC 0.3Pitch 1.0H ZIF R/A Connector
DECIMALS:	ANGLES:		PAR FPC-0.3FX-NPWBH10
.X:±0.30	.X':±5°		DWN
.XX:±0.20	.XX':±2°		CHKD
.XXX:±0.05	.XXX':±1°	CUSTOMER COPY	APVD
		SCALE:1:1	UNIT:MM
		SIZE:A4	UNIT:MM
		SHEET:1F1	REV:A