
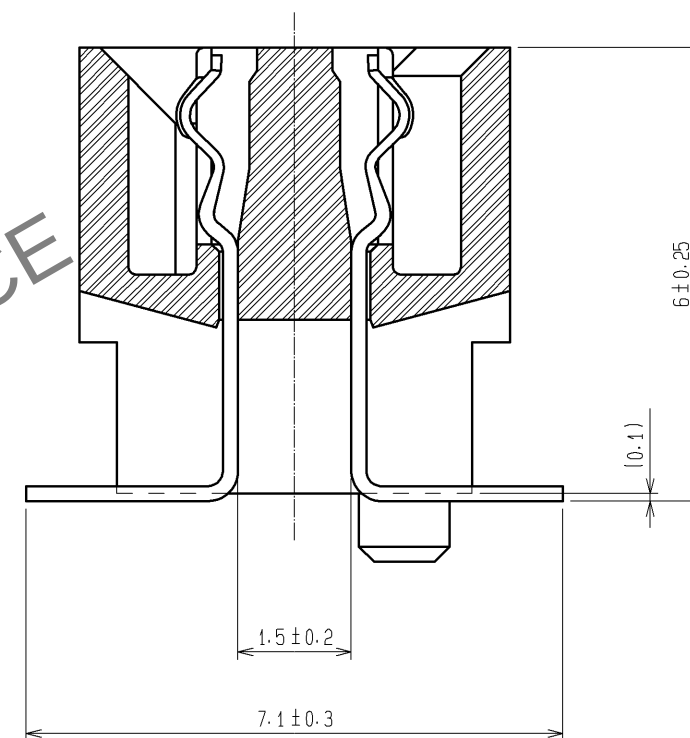


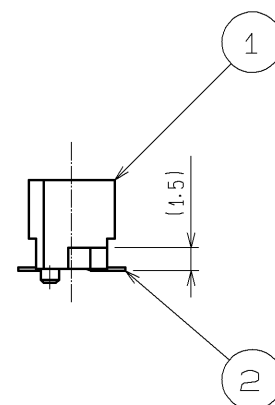

Technical drawing of a rectangular component with dimensions and tolerances. The drawing shows a top view of the component with a central horizontal slot. The overall width is 35.2 ± 0.05 . The distance from the left edge to the center of the slot is 31.2 ± 0.05 . The distance from the right edge to the center of the slot is 2 ± 0.05 . The distance from the left edge to the center of the slot is 0.8 ± 0.05 . The distance from the right edge to the center of the slot is 1.45 ± 0.05 . The distance from the left edge to the center of the slot is 1.5 ± 0.05 . The distance from the right edge to the center of the slot is 0.5 ± 0.03 . The distance from the left edge to the center of the slot is 6.1 ± 0.1 . The distance from the right edge to the center of the slot is 0.1 ± 0.05 . The distance from the left edge to the center of the slot is $\phi 1 \pm 0.05$. The distance from the right edge to the center of the slot is $\phi 1.3 \pm 0.05$. The text "POSITION OF POLARIZATION MARK" is located at the bottom right of the drawing.

- NOTE 1 HRS MARK SHALL BE OPTIONAL.
- 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
- 3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.
- 4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
- 5 FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
- 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.				
					LEAD AREA:TIN-PLATING 1μm min.				
					UNDER PLATING:NICKEL 2μm min.				
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	07. 06. 20	DRAWING NO.	EDC3-084984-23				
		CHECED : HS. OZAWA	07. 06. 20	PART NO.	FX6-80S-0. 8SV2(93)				
		DESIGNED : KT. DOI	07. 06. 20	CODE NO.	CL576-0127-1-93				
		DRAWN : TS. MIYAKI	07. 06. 14						

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

