

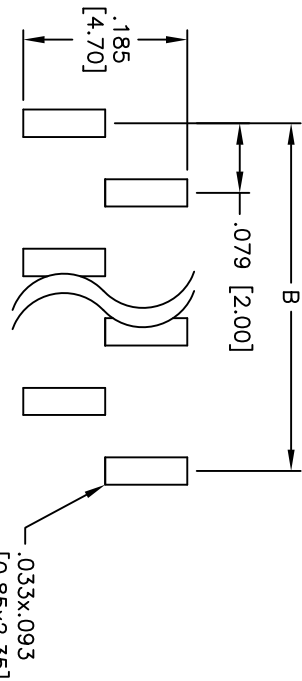
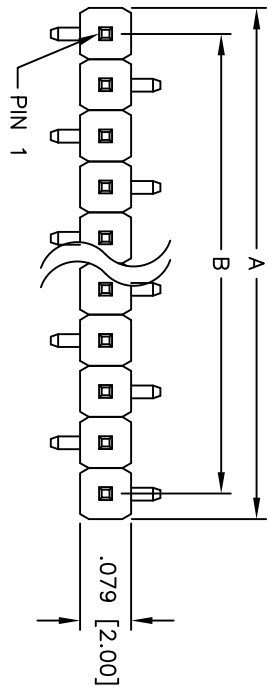


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/14/09	
A		REVISED DIM.	11/6/13	AY/GC



RECOMMENDED PCB LAYOUT

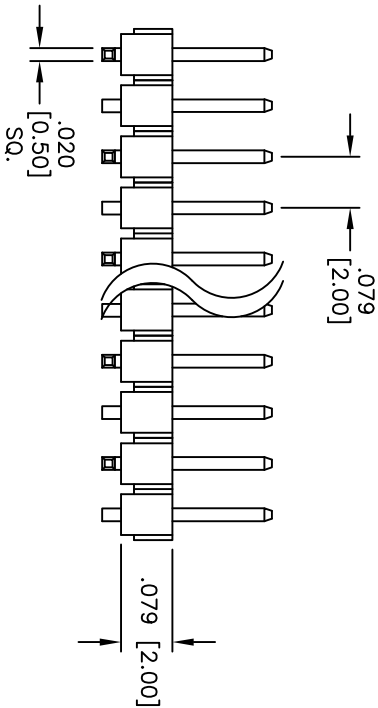

SPECIFICATIONS:

Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Gold flash over Nickel underplate overall
Electrical: Current rating: 1 Amp max
Contact resistance: 20 mohms max
Insulation resistance: 5,000 Mohms min @ 500 VDC
Temperature Rating: Operating temperature: -40°C to +105°C
Environmental: Lead free, RoHS compliant

Positions: 2 thru 40
A = .079 [2.00] x No. of Positions
B = .079 [2.00] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.079 [2.00] SINGLE ROW PIN HEADER
SURFACE MOUNT, TYPE B

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE			
.X	± .10	ØX	± .10	909 Rahway Avenue, Union, NJ 07083			
.XX	± .020	ØXX	± .015	Phone: 908-687-5000 Fax: 908-687-5710			
.XXX	± .015	ØXXX	± .010	.079 [2.00] SINGLE ROW PIN HEADER			
APPROVALS				SURFACE MOUNT, TYPE B			
DRAWN	DRY	7/14/09		ADAM TECH			
CHECKED				909 Rahway Avenue, Union, NJ 07083			
APPROVED				Phone: 908-687-5000 Fax: 908-687-5710			

ROHS
COMPLIANT