


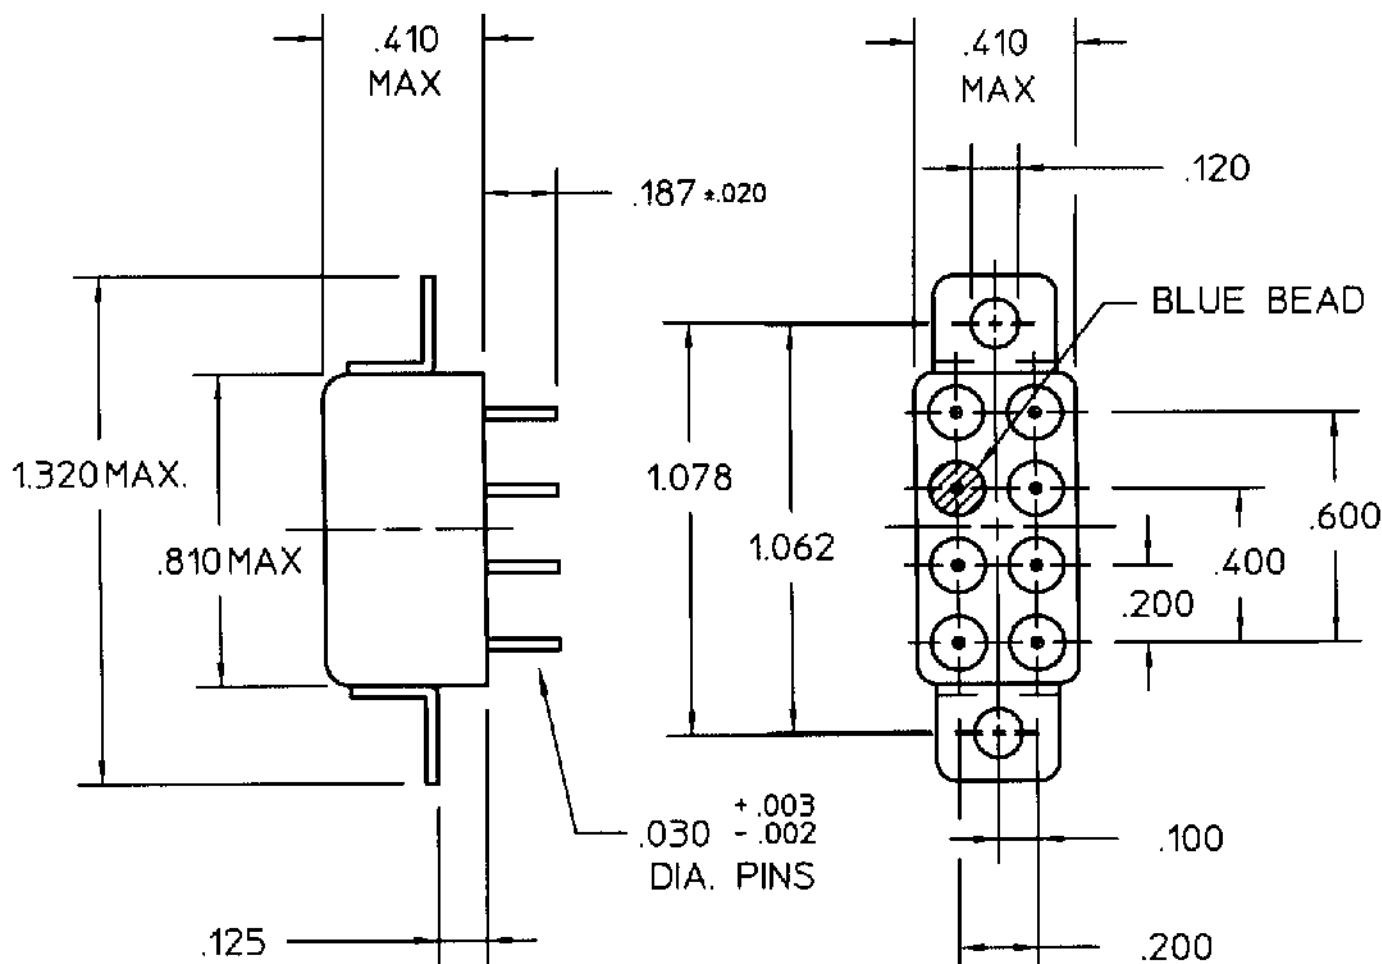

REV. 0
DCO 16204


COIL: @ 25°C
RESISTANCE 700 OHMS $\pm$ 10%
NOMINAL VOLTAGE 26.5 VDC
MUST OPERATE 13.5 VDC
8.0 VDC MAX, 1.5 VDC MIN.

MUST RELEASE _____

ENVIRONMENT: 10 3000 30
VIBRATION 100 CPS TO 6 CPS @ g's
SHOCK g's MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

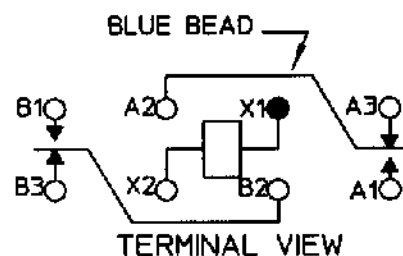

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 9/29/93 CK. *[Signature]*

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/6-205 REV. _____
"HFW" RELAY

HFW1230K07

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HFW1230K07](#)