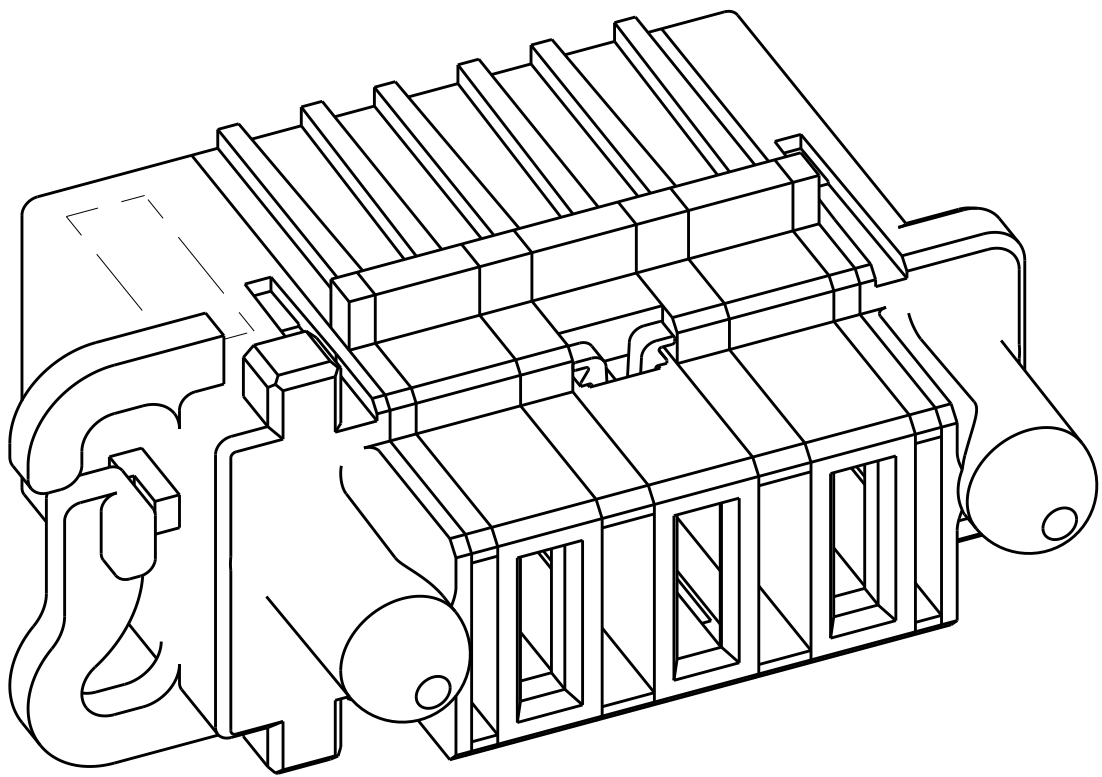
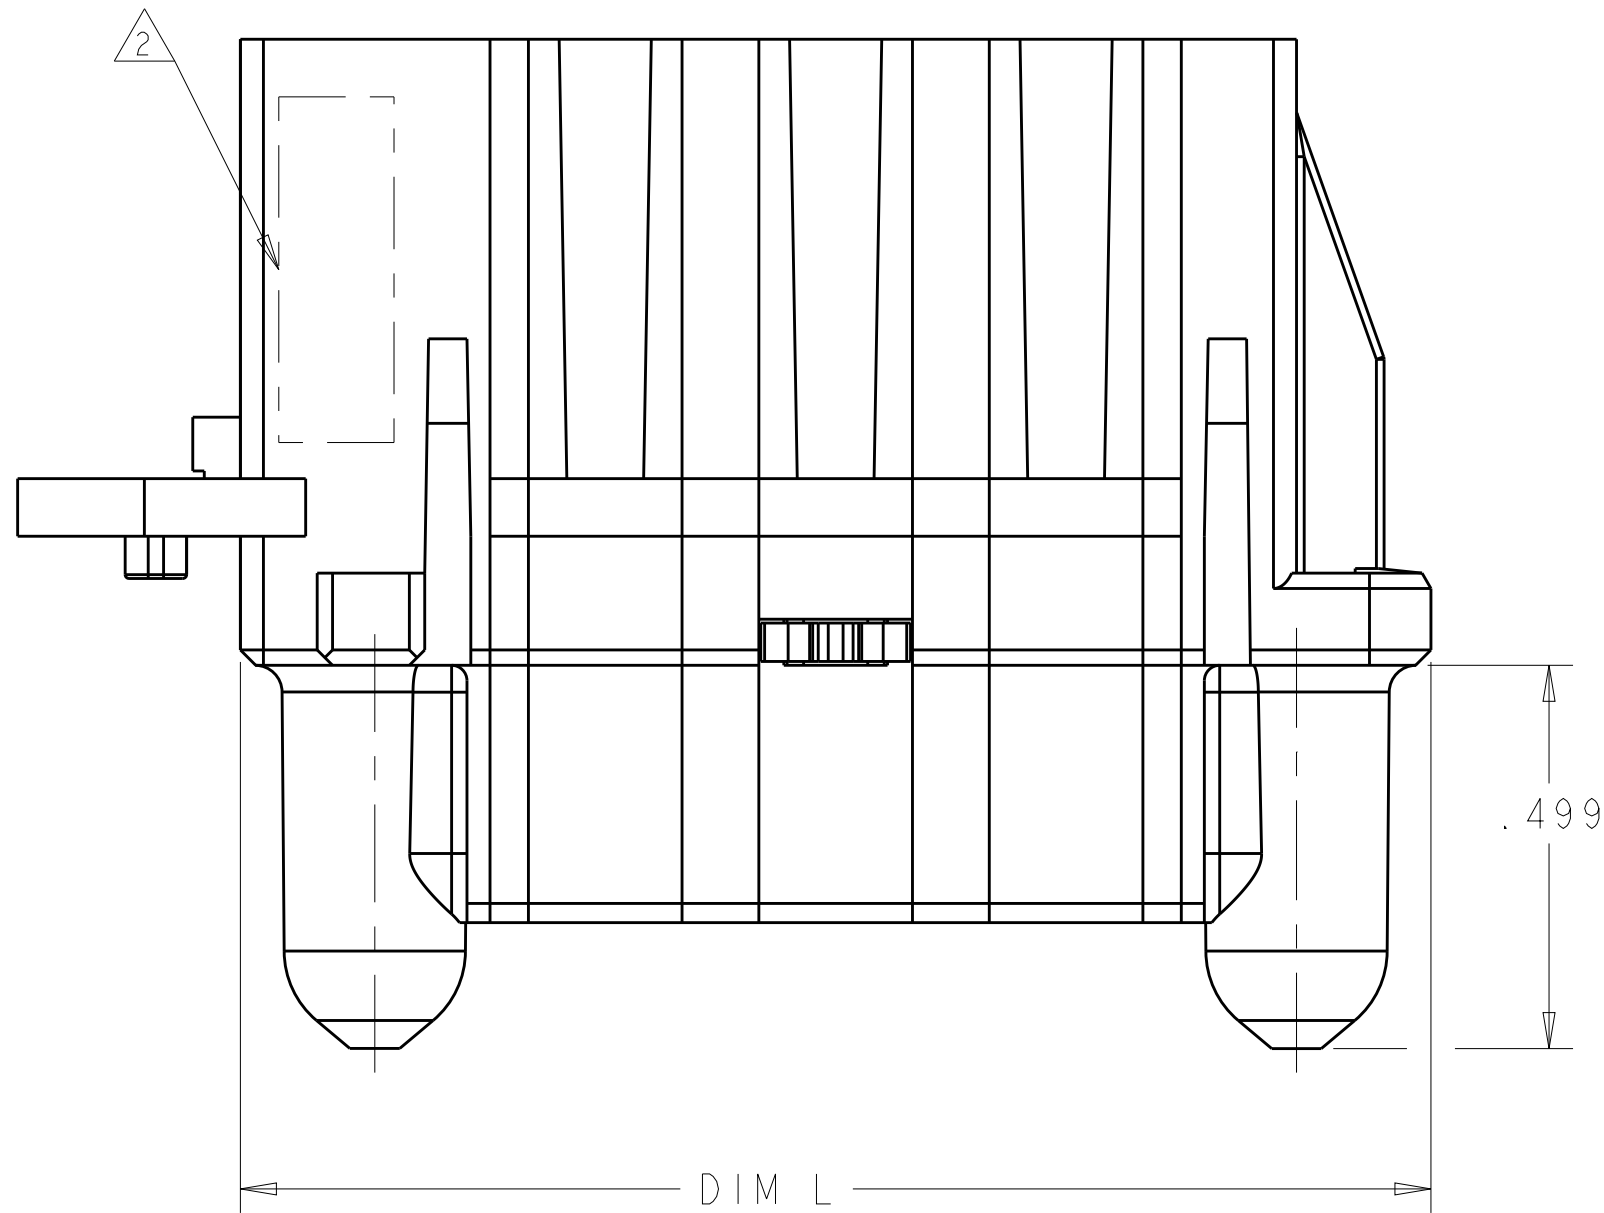


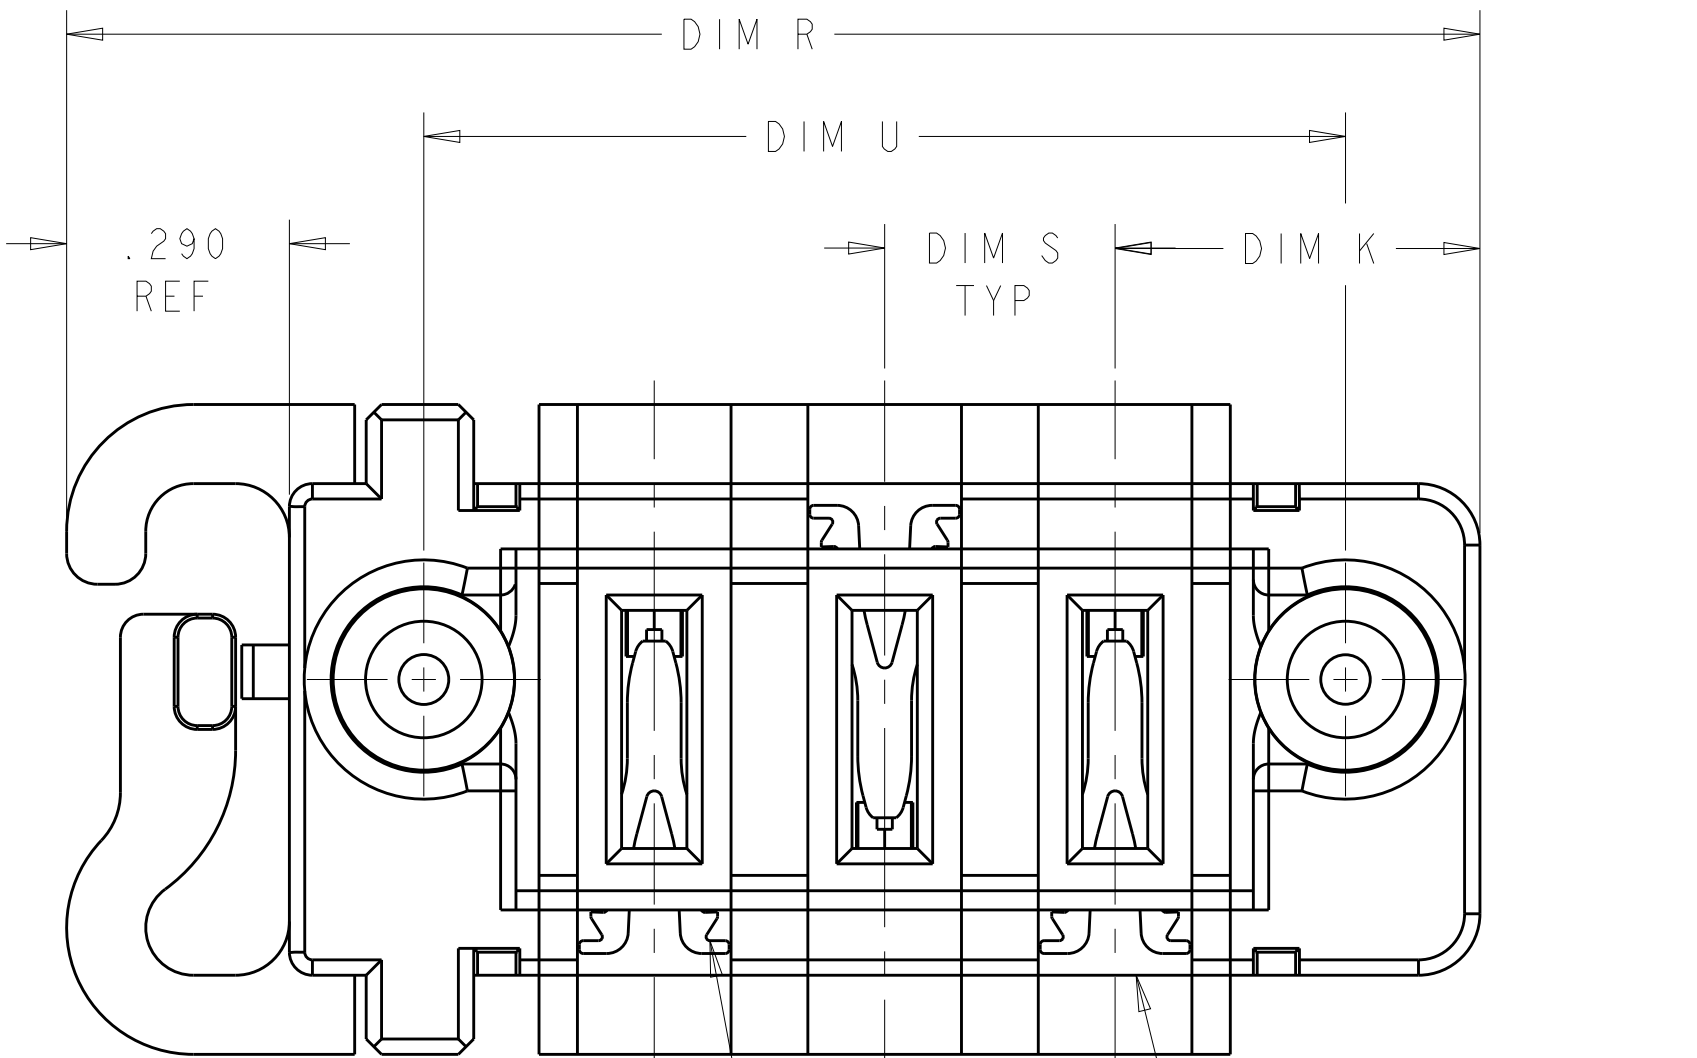
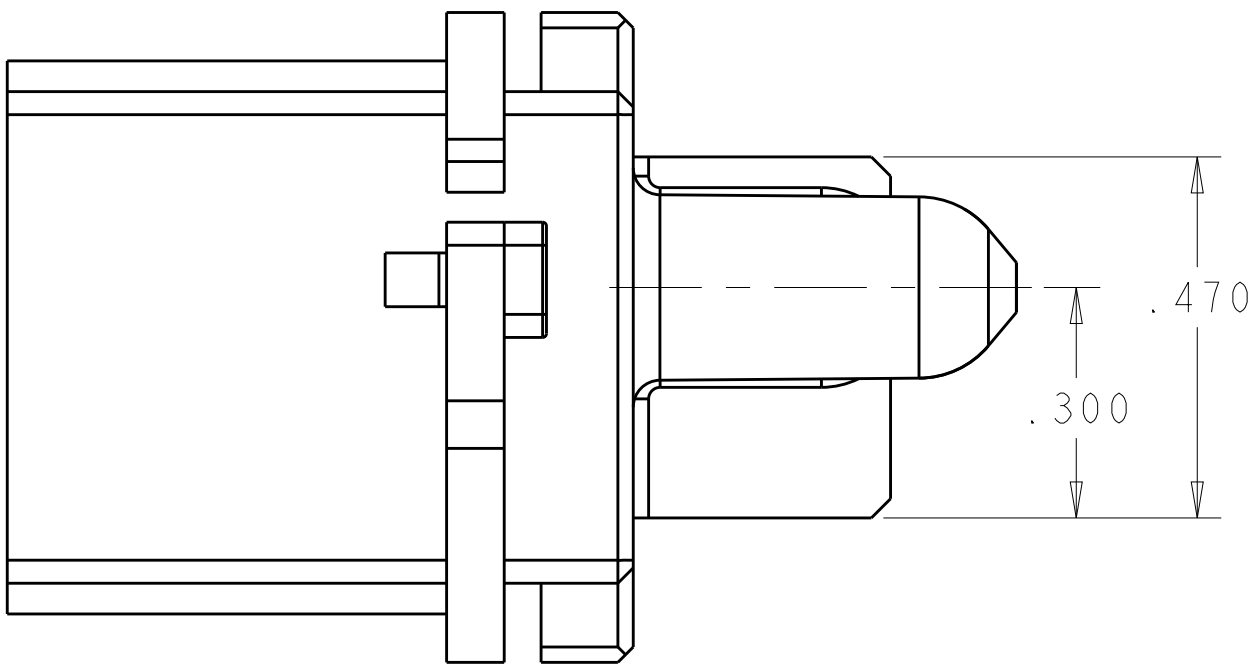
LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		D9		ADD NEW DASH NUMBER -19	09AUG2012	ML	SZ	
		d9						



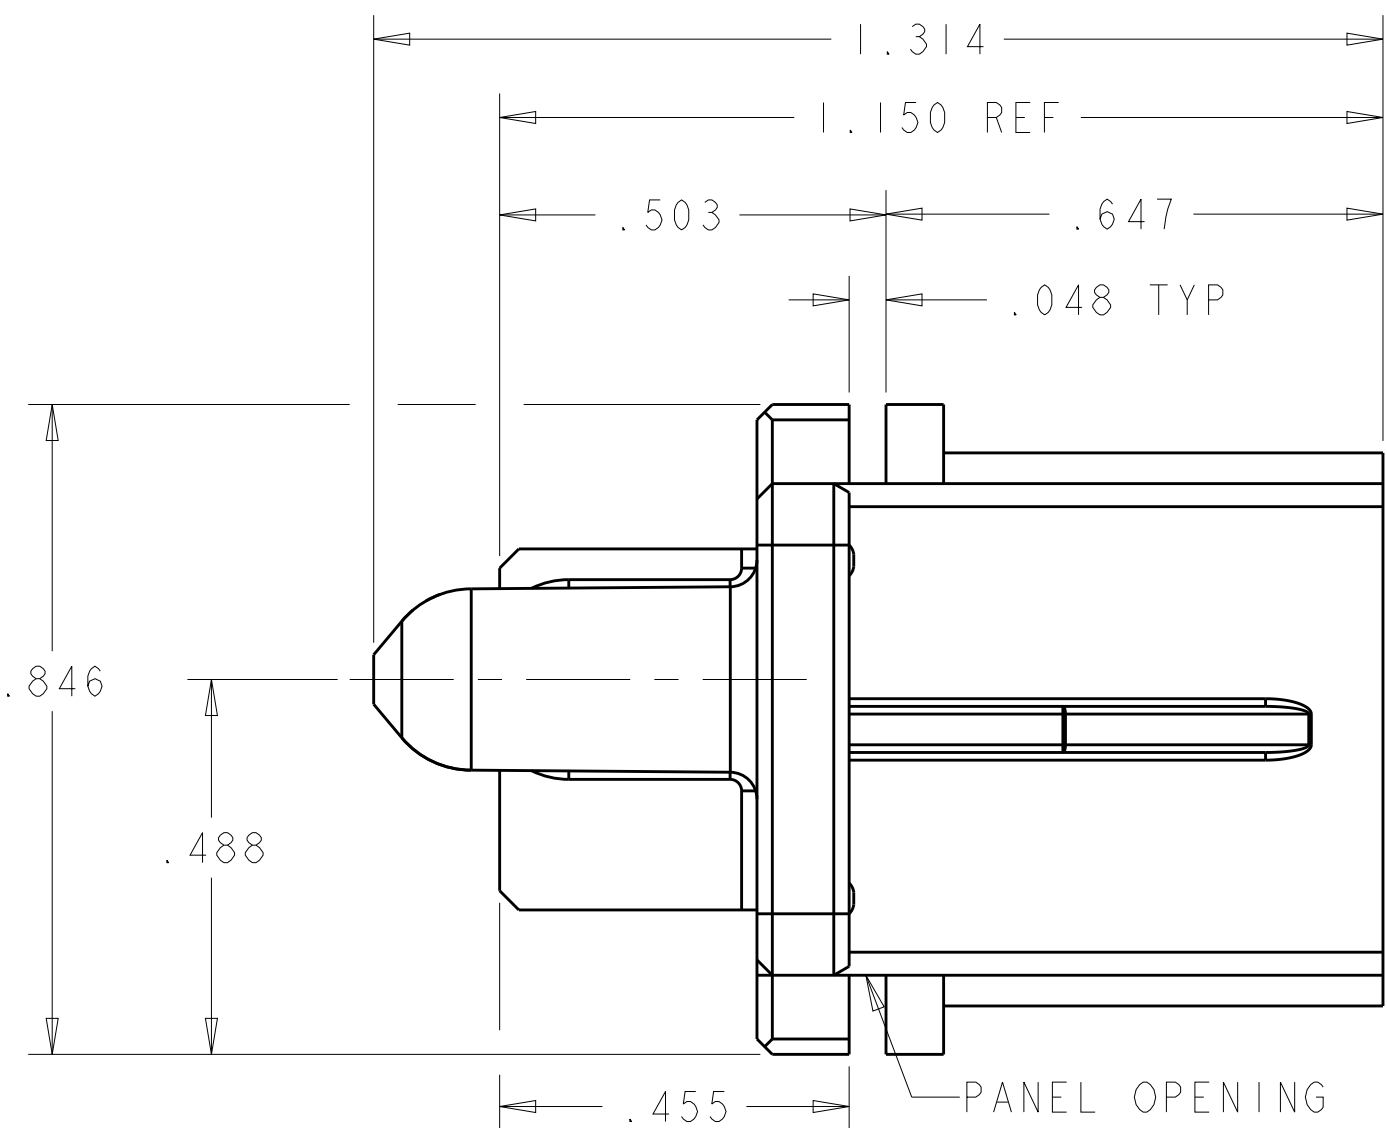
ISOMETRIC VIEW



- 1 MATERIAL: THERMO PLASTIC, UL94 V-0.
- 2 COMPANY TRADEMARK, PART NUMBER, AND DATE CODE TO BE MARKED IN AREA SHOWN.
- 3 PANEL THICKNESS = .040±.005
- 4 CONNECTOR KEEP OUT ZONE.
- 5 POWER CONTACT REFERENCE:
PART NUMBER: 1600960 & 1600961
MATERIAL: COPPER ALLOY
FINISH (INTERFACE):.0000030 Au OVER .0000050 Ni
- 6 DASH NUMBERS INDICATED ARE NOT RELEASED FOR PRODUCTION.
- 7 VARIABLE DIMENSION SHOW ON THE TABLE.



REF:
POWER SECONDARY LOCK
PART NUMBER: 1600903-1



D9	3.465	7	2.825	3.175	.525	6ACP(8AWG)	2-292499-0
	1.840	.300	1.200	1.550	.475	3ACP(8AWG)	1-292499-9
	2.365	.375	1.725	2.075	.475	4P(8AWG)	1-292499-8
	2.040	.375	1.400	1.750	.500	3ACP(8AWG)	1-292499-6
D7	2.190	.300	1.550	1.900	.500	4ACP(10AWG)	1-292499-5
	1.940	.200	1.300	1.650	.425	5HDP(12AWG)	1-292499-4
	3.465	7	2.825	3.175	.525	6ACP(10AWG)	1-292499-3
	2.340	.200	1.700	2.050	.425	7HDP(12AWG)	1-292499-2
6	2.440	.300	1.800	2.150	.475	5ACP(8AWG)	1-292499-1
	2.440	.250	1.800	2.150	.450	6P(12AWG)	292499-8
	2.940	.250	2.300	2.650	.450	8P(12AWG)	292499-7
	1.940	.250	1.300	1.650	.450	4P(12AWG)	292499-4
	2.140	.300	1.500	1.850	.475	4ACP(12AWG)	292499-3
	2.440	.300	1.800	2.150	.475	5ACP(12AWG)	292499-2
	1.840	.300	1.200	1.550	.475	3ACP(12AWG)	292499-1
	DIM R REF	DIM S	DIM U	DIM L	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
: 1

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.002
FINISH

Customer Drawing

DWN S.ZHAO 08AUG2006
CHK S.ZHAO 08AUG2006
APVD S.ZHAO -

PRODUCT SPEC
108-2157
APPLICATION SPEC
114-13112
WEIGHT -

Customer Drawing

NAME
SLIDE TO LOCK PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES, MULTI-BEAM XL

SIZE A1
CAGE CODE 00779
DRAWING NO. 292499

RESTRICTED TO
-
REV E

TE Connectivity


SCALE 1:1
SHEET 1 OF 3

LOC		DIST		REVISIONS			
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			
			P3	P2	P1	
292499-1	D					
	C					
	B					
	A					
3ACP						

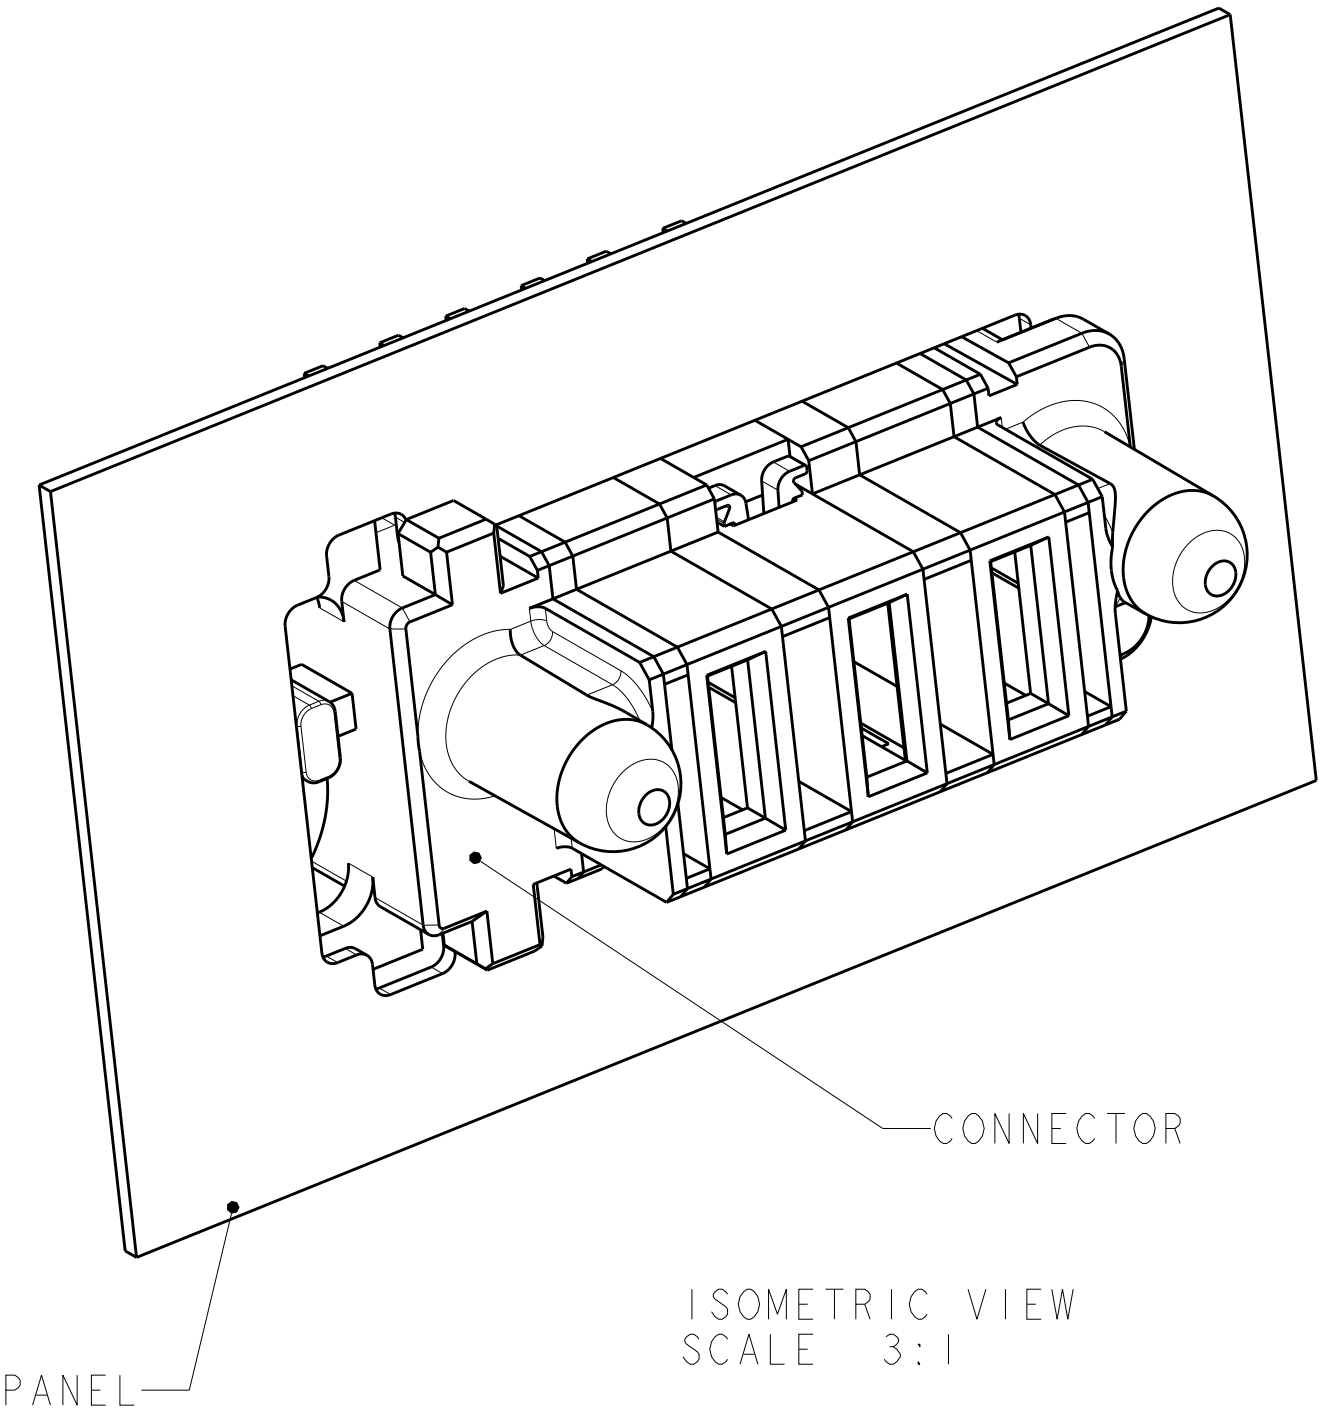
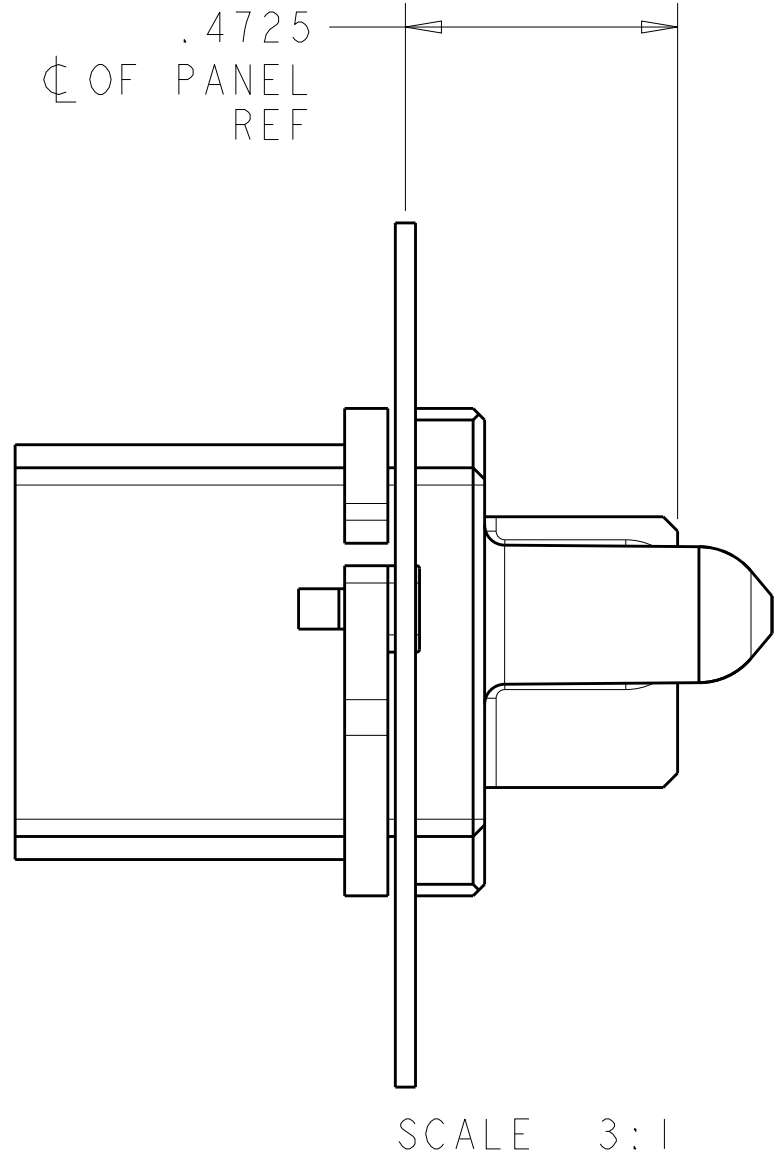
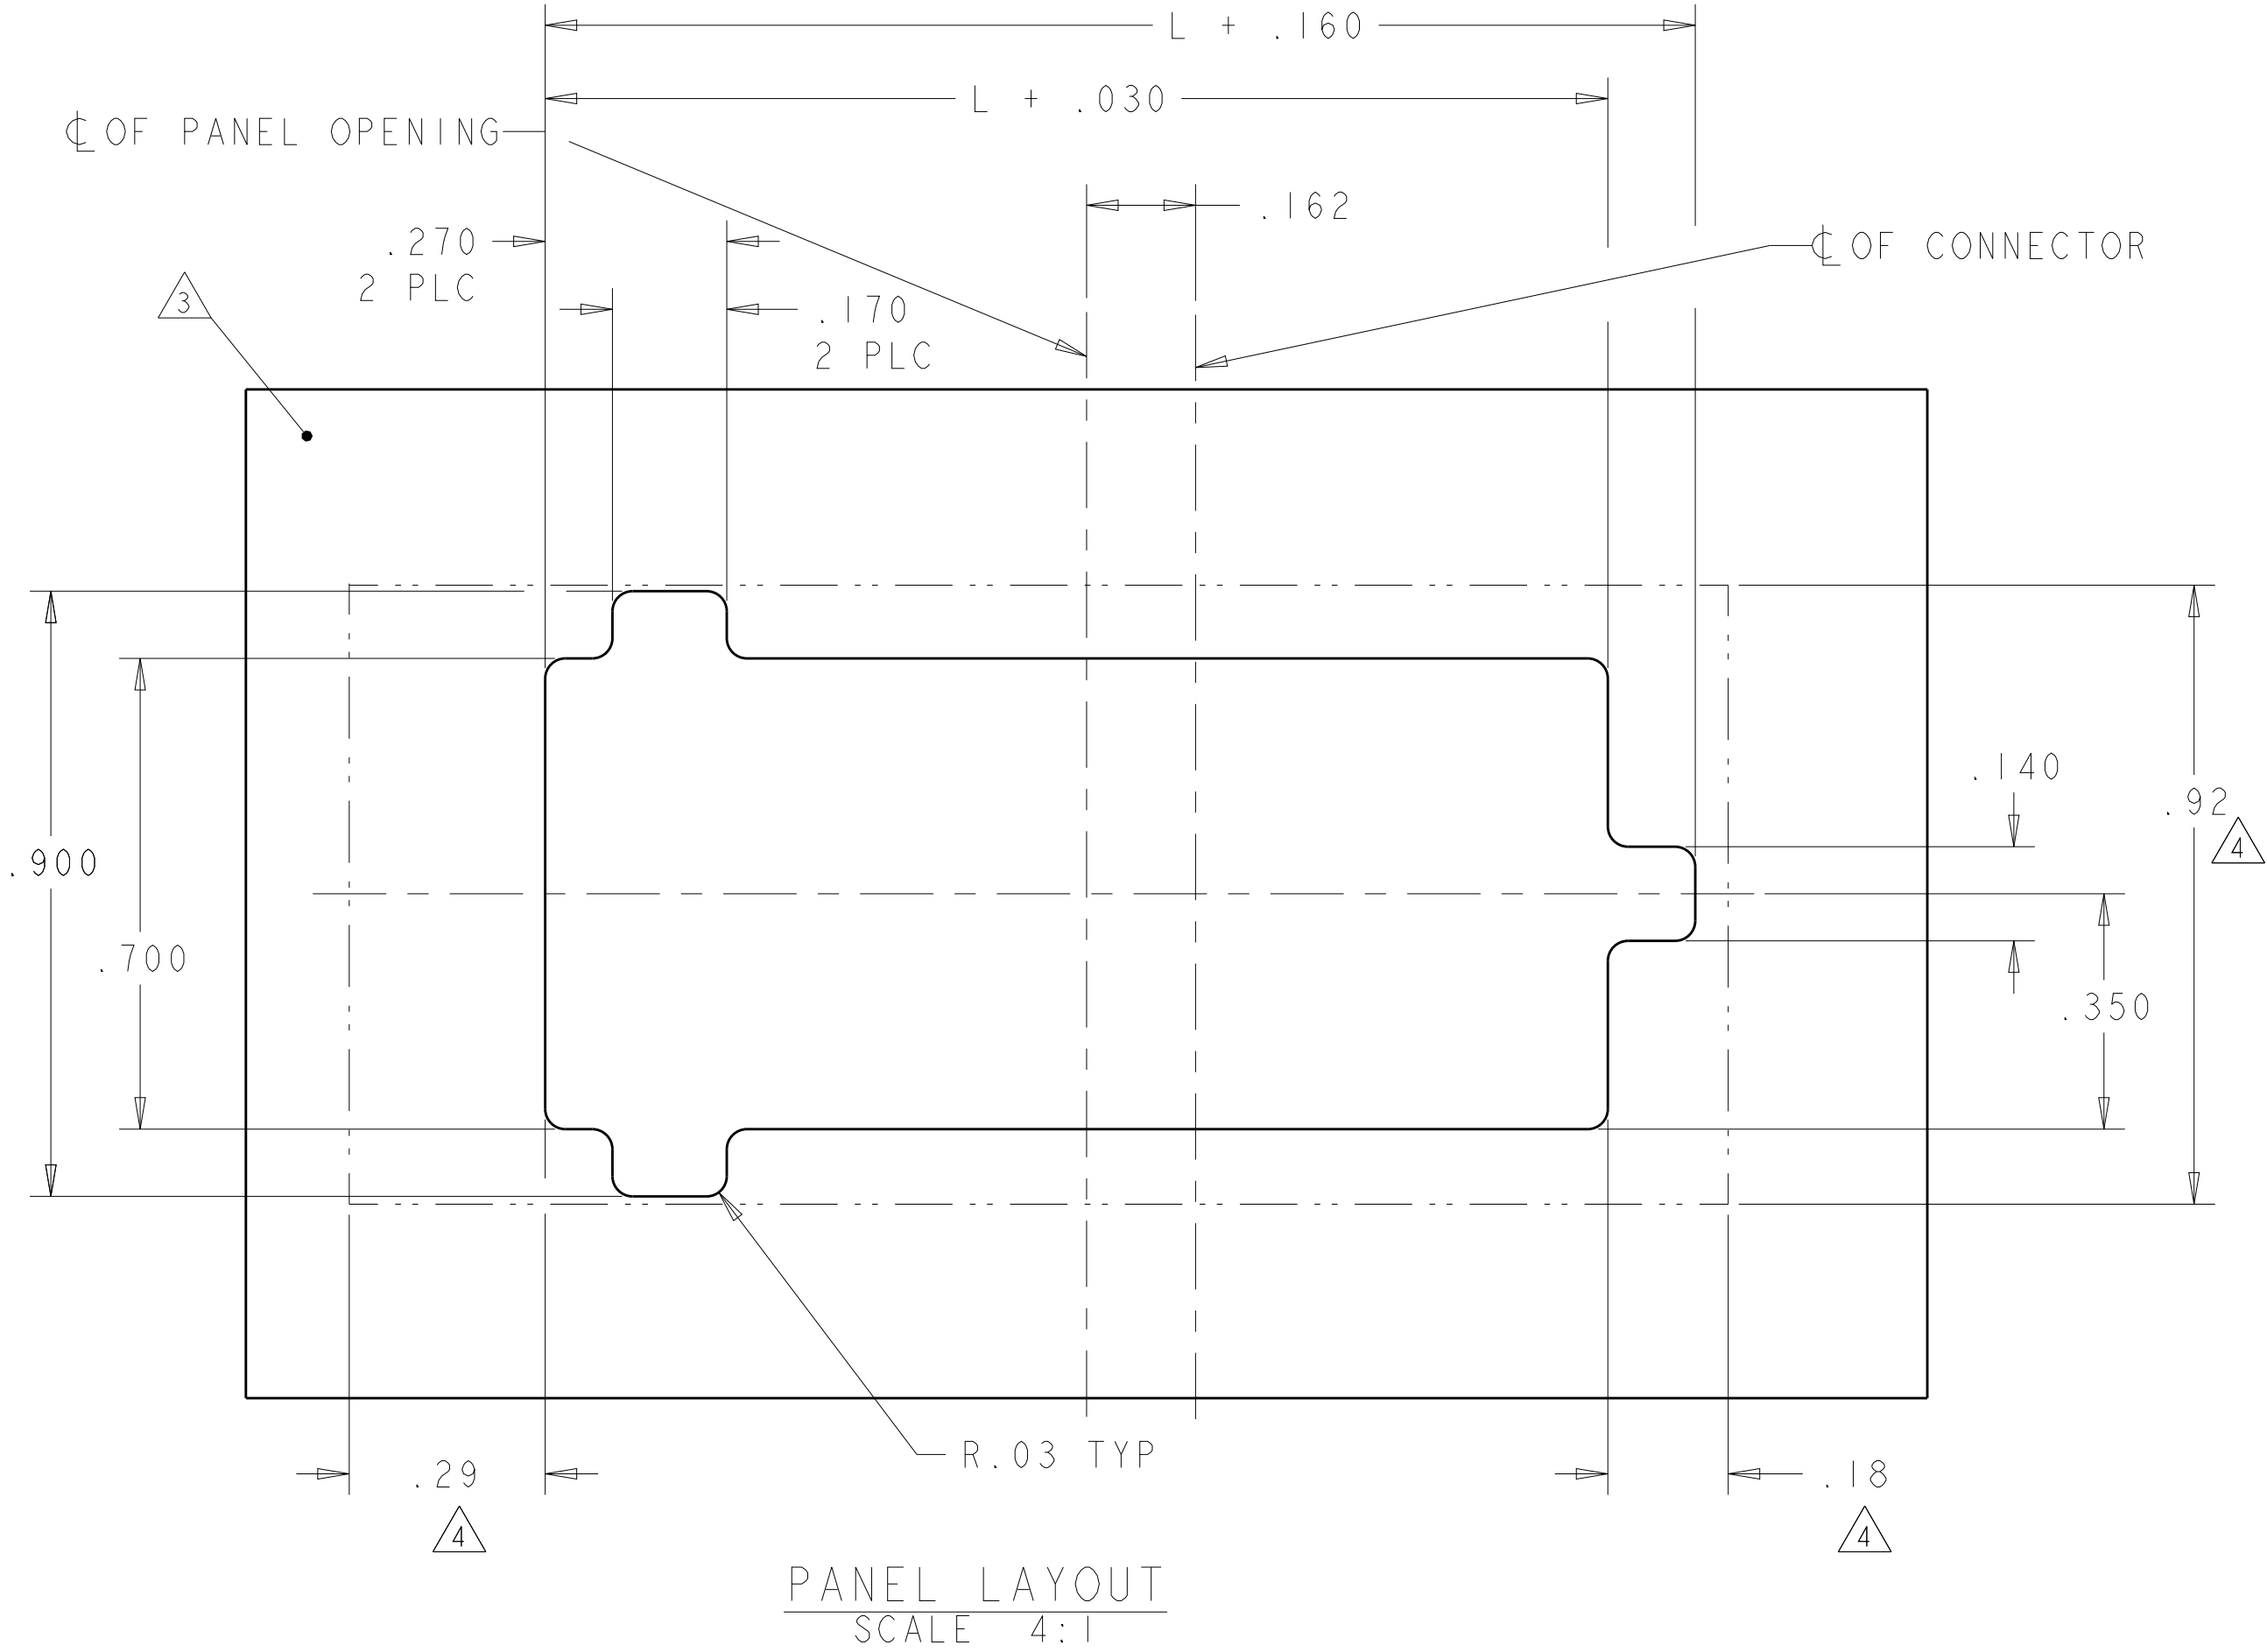
PART NUMBER	ROWS		POWER					
			P5	P4	P3	P2	P1	
292499-2	D							
	C							
	B							
	A							
5ACP								

PART NUMBER	ROWS		POWER				
			P4	P3	P2	P1	
292499-3	D						
	C						
	B						
	A						
4ACP							

PART NUMBER	ROWS		POWER				
			P4	P3	P2	P1	
292499-4	D						
	C						
	B						
	A						
4P							

PART NUMBER	ROWS		POWER								
			P8	P7	P6	P5	P4	P3	P2	P1	
292499-7	D C B A										
8P											



PART NUMBER	ROWS		POWER						
			P6	P5	P4	P3	P2	P1	
292499-8	D C B A								
6P									







RM	STANDARD POWER CONTACT
RA	MFBL POWER CONTACT
CODE	DESCRIPTION
CONTACT TABLE	



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO 08AUG2006	 TE Connectivity	
DIMENSIONS:		CHK S. ZHAO 08AUG2006		
INCHES		APVD S. YAO -		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		SLIDE TO LOCK PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES, MULTI-BEAM XL
0 PLC ±.		PRODUCT SPEC		
1 PLC ±.01		APPLICATION SPEC		
2 PLC ±.005		SIZE		
3 PLC ±.002		CAGE CODE		DRAWING NO
4 PLC ±.002		RESTRICTED TO		
ANGLES ±.002		WEIGHT		A100779
FINISH		Customer Drawing		
MATERIAL		SCALE		1:1
-		SHEET		
-		2 of 3		REV
-		E		

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	SEE SHEET I	-	-	-	



PART NUMBER	ROWS		POWER					
			P5	P4	P3	P2	P1	
I-292499-1	D C B A		RM	RA	RM	RA	RM	
5ACP								

PART NUMBER	ROWS		POWER			
			P3	P2	P1	
I-292499-6	D C B A		RM	RM	RM	
3ACP						



PART NUMBER	ROWS		POWER							
			P7	P6	P5	P4	P3	P2	P1	
I-292499-2	D C B A		RM		RM		RM		RM	
7HDP										



PART NUMBER	ROWS		POWER				
			P4	P3	P2	P1	
I-292499-8	D C B A		RA	RM	RM	RM	
4P							

D7



PART NUMBER	ROWS		POWER						
			P6	P5	P4	P3	P2	P1	
I-292499-3	D C B A		RM	RM	RM	RM	RM	RM	
6ACP									

 .425
5PLC


PART NUMBER	ROWS		POWER			
			P3	P2	P1	
I-292499-9	D C B A		RM	RA	RM	
3ACP						

PART NUMBER	ROWS		POWER						
			P6	P5	P4	P3	P2	P1	
2-292499-0	D C B A		RM	RM	RM	RM	RM	RM	
6ACP									

 .425
5PLC

PART NUMBER	ROWS		POWER					
			P5	P4	P3	P2	P1	
I-292499-4	D C B A		RM		RM		RM	
5HDP								

NO LOACING CONTACT

PART NUMBER	ROWS		POWER				
			P4	P3	P2	P1	
I-292499-5	D C B A		RA	RA	RM	RM	
4ACP							

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
S.ZHAO
08AUG2006

CHK
S.ZHAO
08AUG2006

APVD
S.YAO

NAME
SLIDE TO LOCK PANEL MOUNT CABLE
RECEPTACLE HOUSING, WITH GUIDES,
MULTI-BEAM XL

DIMENSIONS:
INCHES

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±"
±.01
±.005
±.002
±1°
-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

MATERIAL
-

Customer Drawing

SCALE
1:1

SHEET
3 OF 3

REV
E

TE Connectivity

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=292499

RESTRICTED TO
-

4805 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-292499-2](#)