


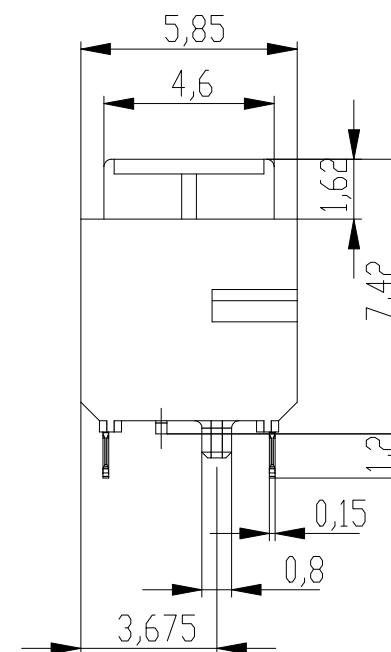


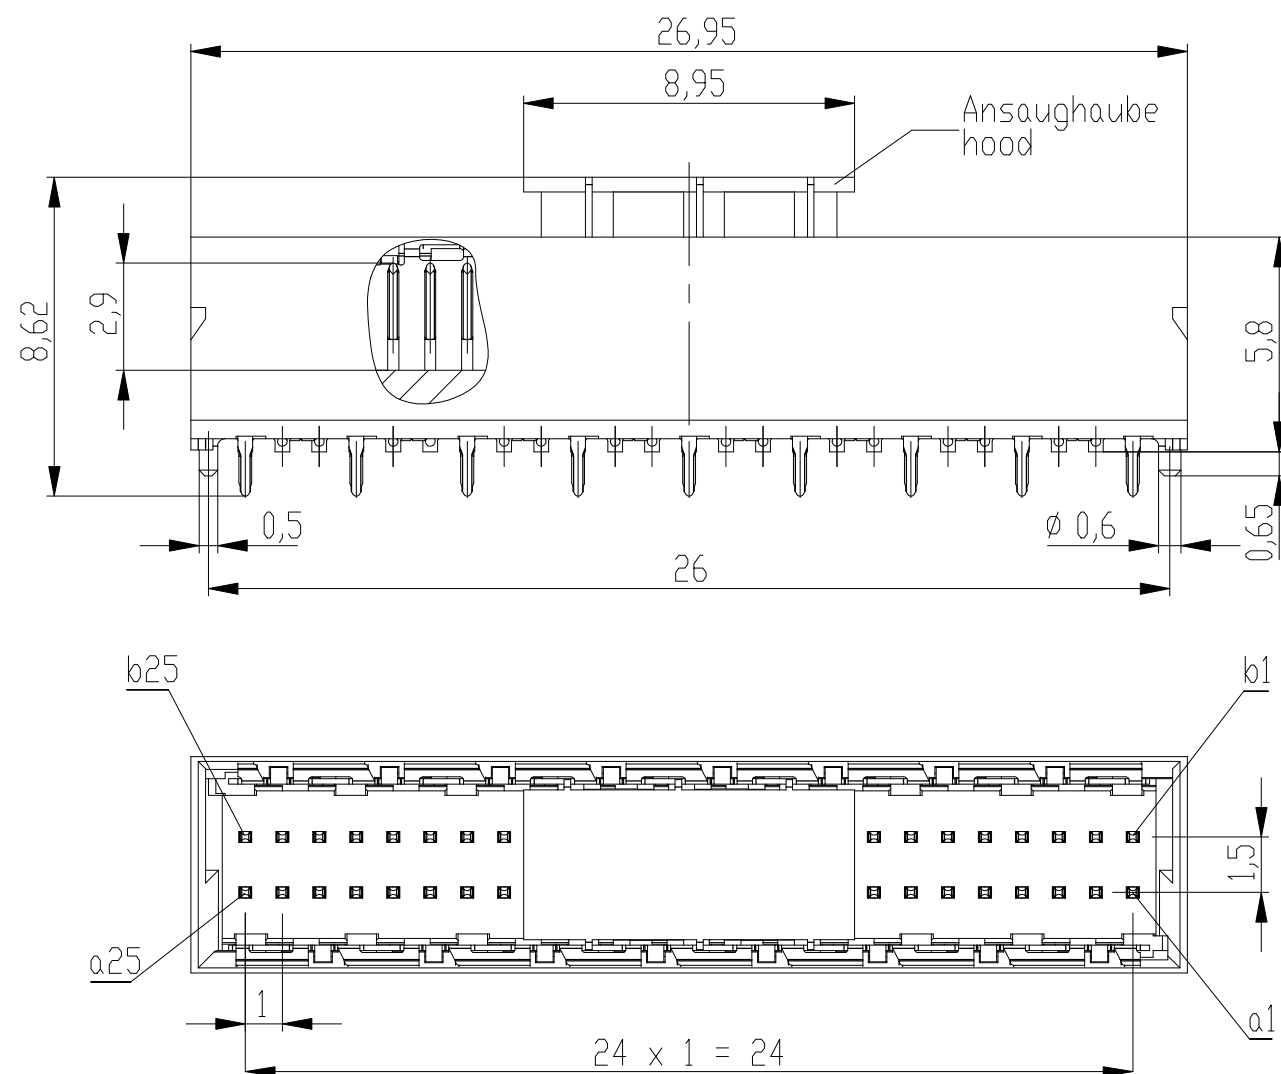


Verpackt im Gurt nach DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 400 Stück
Packaging unit: 400 pcs



Abspulrichtung - Reel off Direction

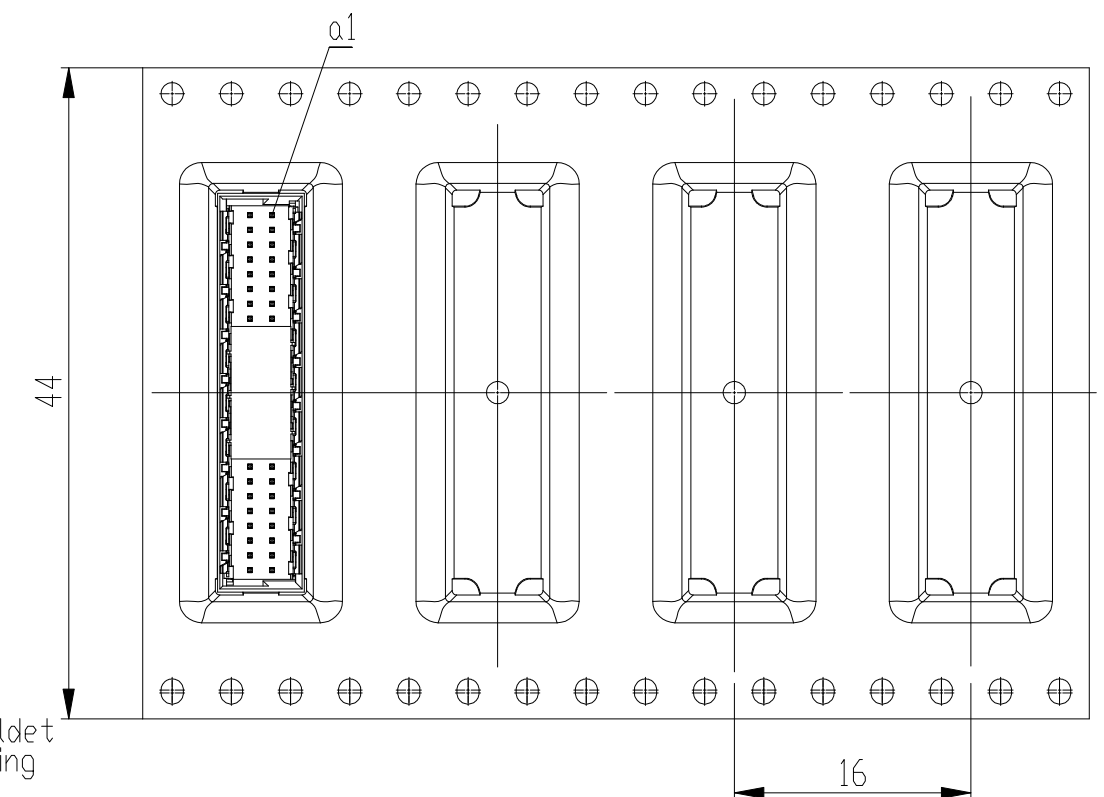

Leiterplatten-Layout Vorschlag / PCB-Layout proposal

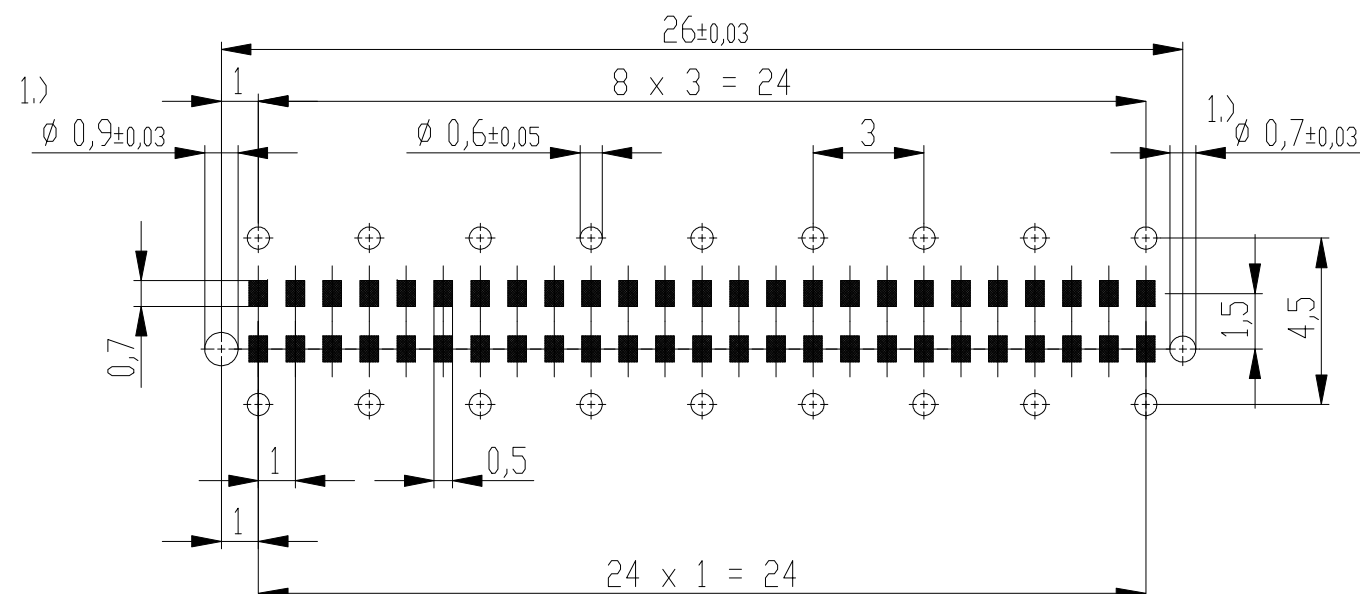

1.) Durchmesser des Bohrers / drill tool

Bedruckungsvorschrift siehe Zeichnung: 354630
prints specification see drawing: 354630


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Copyright by TE GmbH
Proprietary notice pursuant to ISO 6016 to be observed.

Information:			Tolerances Dim. for Information ISO 8015		 All Dimensions in mm		Scale 5:1					
Customer drawing:			THIS DRAWING IS A CONTROLLED DOCUMENT.			Subject to modification without prior notice. Drawing will not be updated.			Designation			
									ERNI-Messerleiste 2mm THR, 50 polig Male 2mm THR, 50 contacts			
j				28.01.2014				 TE Connectivity		C- 224558-E		I
Index				Date				Class		MSPEED		A3

Copyright by TE Connectivity
Proprietary notice pursuant to ISO 16016 to be observed