

SlimFix
VT SF 4/12 MC NE RT V0**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

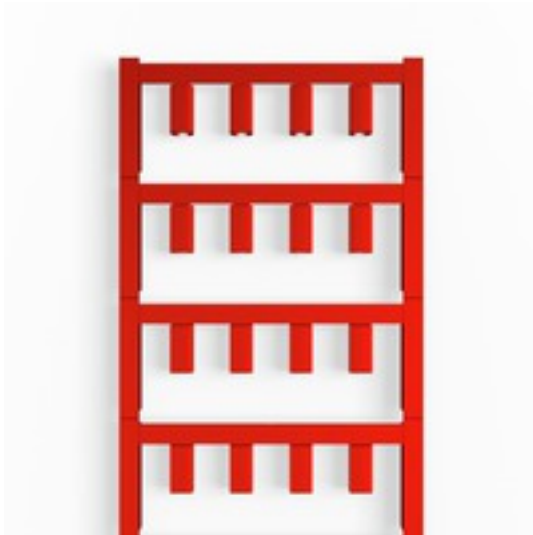

Similar to illustration



SlimFix are conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. They consist of halogen-free material and comply with flammability rating V0/V2. SlimFix is an acknowledged and accredited marker type for traffic engineering applications. The SF tool allows easy installation, even in case of small markers.

- Halogen-free material
- Flammability rating V0/V2
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm²
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	VT SF 4/12 MC NE RT V0
Order No.	1746030003
Version	SlimFix, Conductor and cable markers, 3.6 - 6 mm, 12 x 5.7 mm, Red
GTIN (EAN)	4008190986377
Qty.	192 pc(s).
compatible printer	1324380000
Alternative product	1919610000

SlimFix
VT SF 4/12 MC NE RT V0

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	5.7 mm	Width (inches)	0.224 inch
Height	12 mm	Height (inches)	0.472 inch
Depth	6.1 mm	Depth (inches)	0.24 inch
Net weight	0.64 g		

General data

Colour	Red	Material	Polyamide 66
Material colour according to resistance code	2	Recommended industries	Transportation, Machinery
Size of labelling field	12x5.7 mm	Type of printing	blank
UL 94 flammability rating	V-0	Width	5.7 mm

Conductor and cable markers

Conductor O.D.	3.6 - 6 mm	Conductor O.D., max.	6 mm
Conductor O.D., min.	3.6 mm	Conductor cross-section, max.	4 mm ²
Conductor cross-section, min.	2.5 mm ²	Halogen	No

Classifications

ETIM 3.0	EC001530	ETIM 4.0	EC001530
ETIM 5.0	EC001530	ETIM 6.0	EC001530
UNSPSC	44-12-17-08	eClass 5.1	27-14-91-03
eClass 6.2	27-40-04-01	eClass 7.1	27-14-91-03
eClass 8.1	27-14-91-03	eClass 9.0	27-14-07-08
eClass 9.1	27-40-04-01		

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	EPLAN, WSCAD, Zuken E3.S
Engineering Data	STEP
Software	M-Print PRO configuration file

Data sheet

SlimFix
VT SF 4/12 MC NE RT V0

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings