


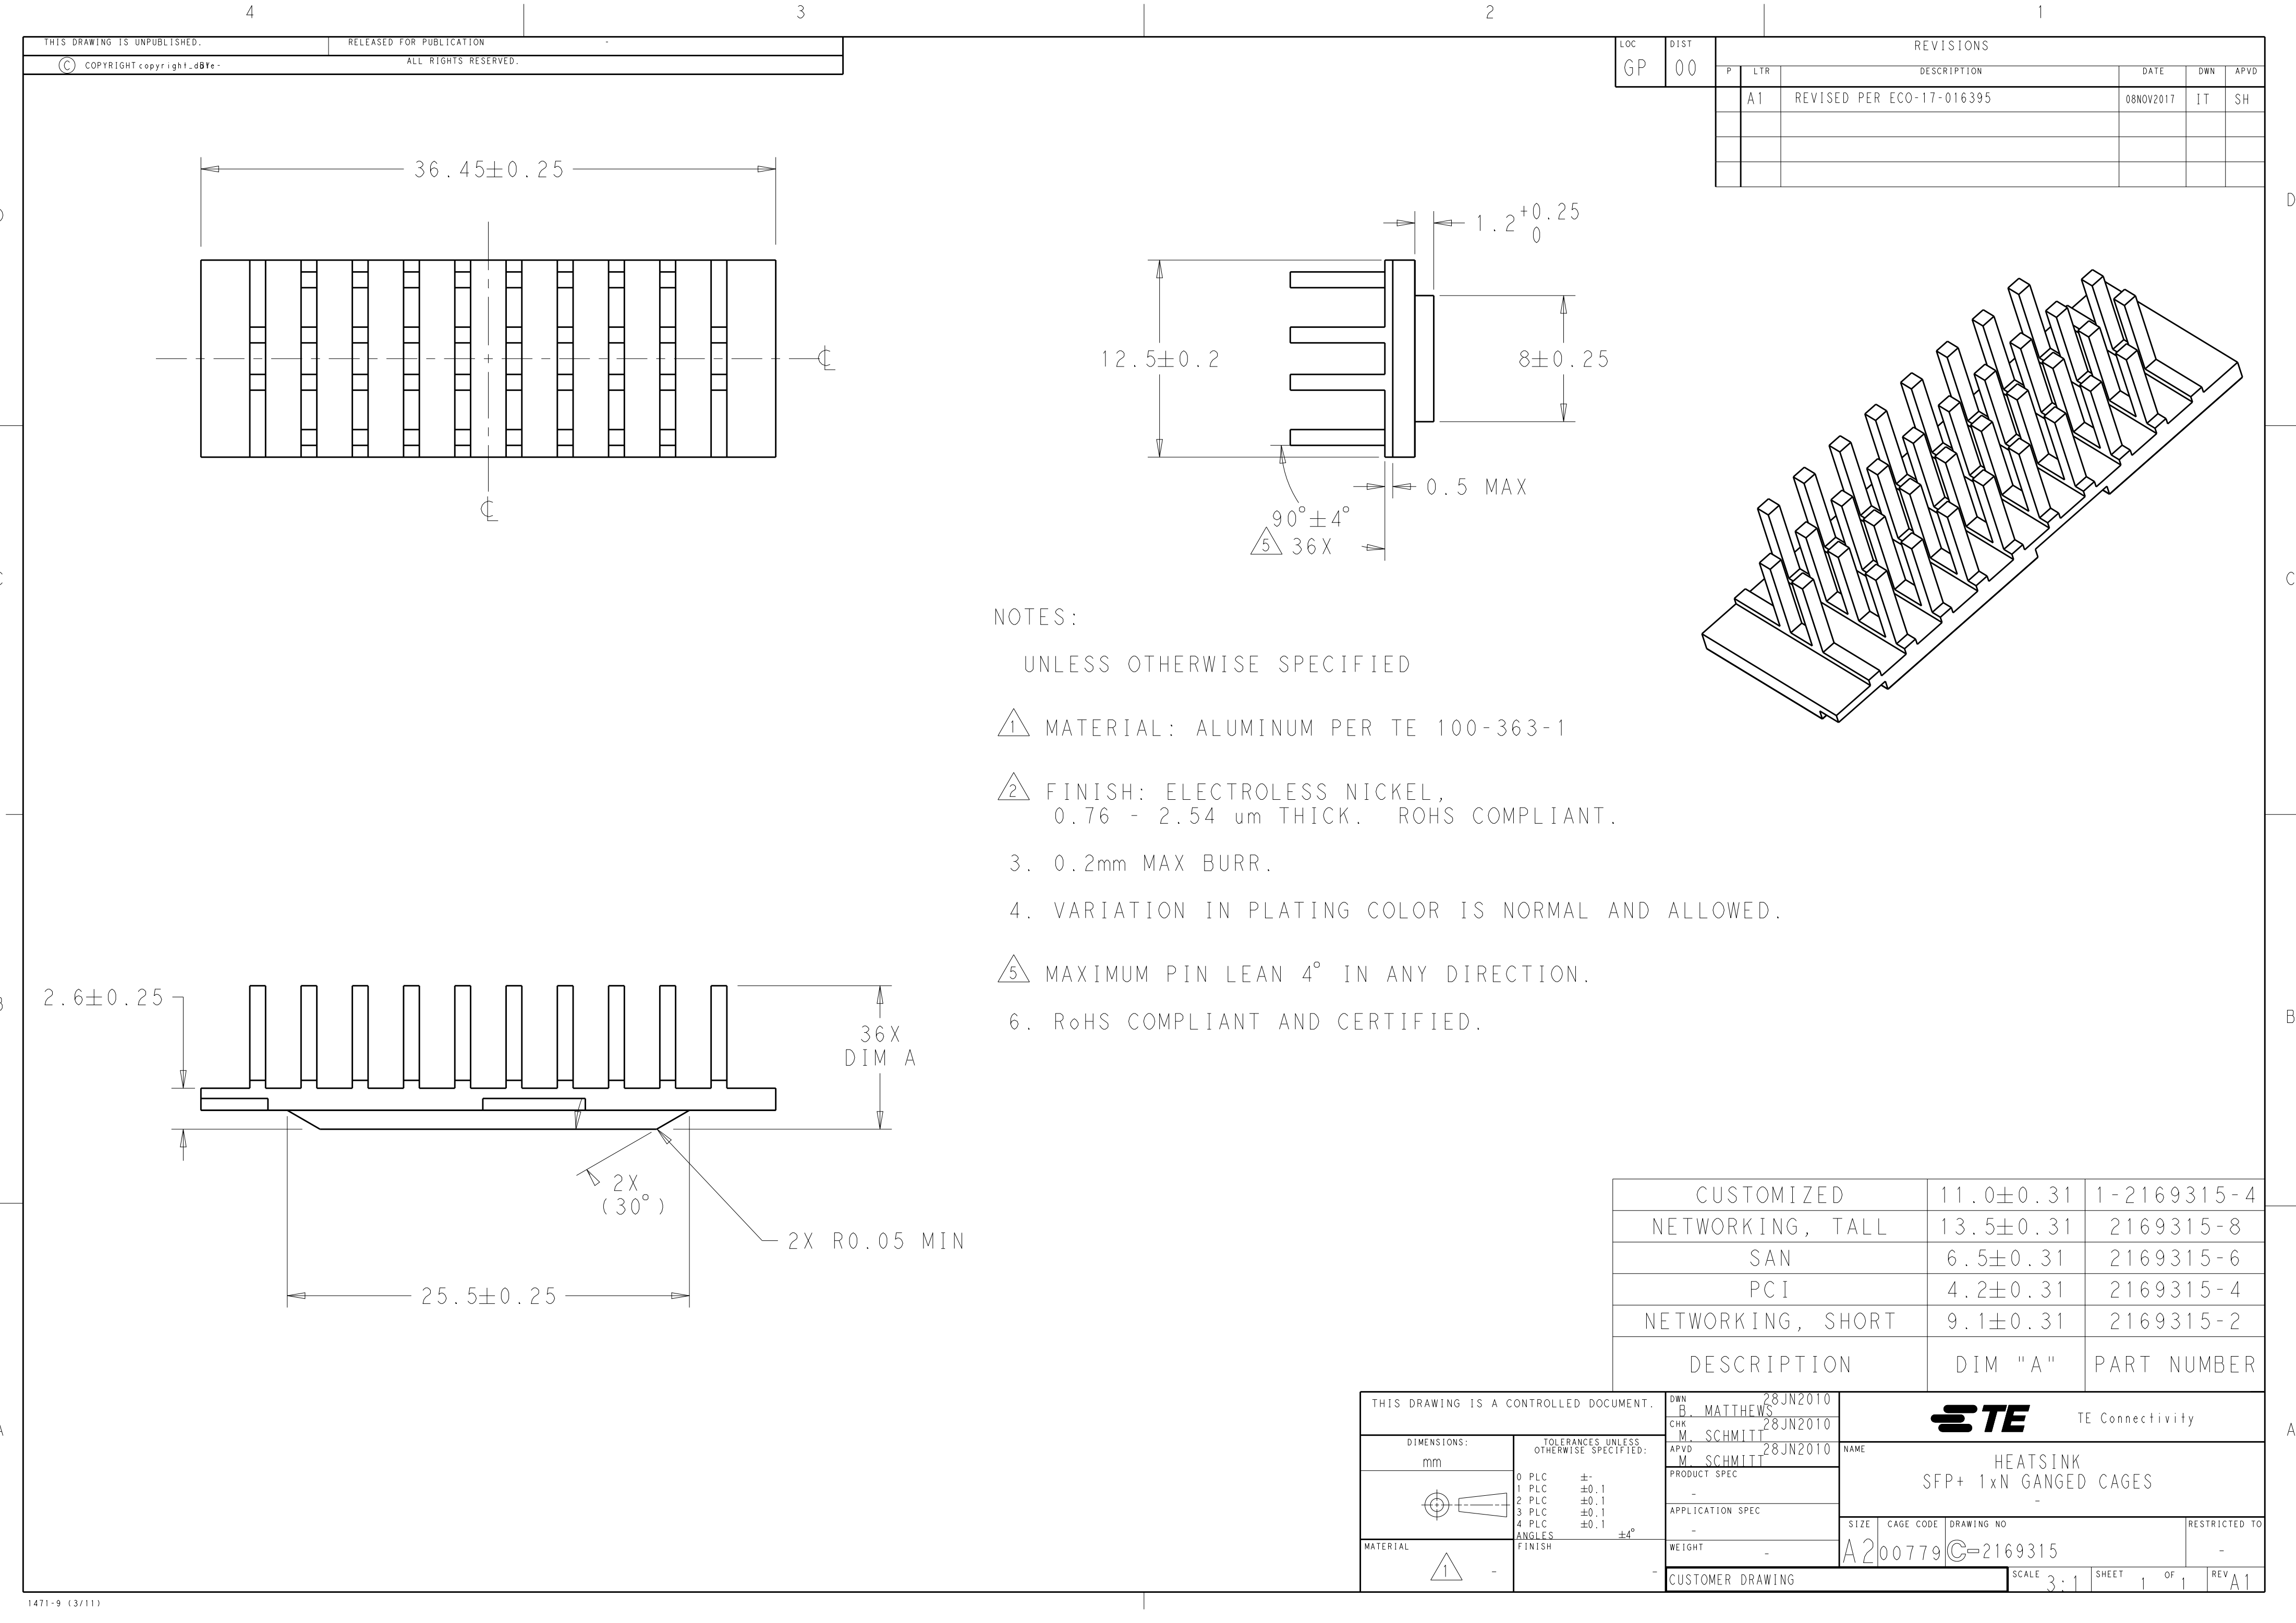

NOTES:

UNLESS OTHERWISE SPECIFIED

1 MATERIAL: ALUMINUM PER TE 100-363-1

2 FINISH: ELECTROLESS NICKEL,
0.76 - 2.54 μ m THICK. ROHS COMPLIANT.

3. 0.2mm MAX BURR.

4. VARIATION IN PLATING COLOR IS NORMAL AND ALLOWED.

5 MAXIMUM PIN LEAN 4° IN ANY DIRECTION.

6. RoHS COMPLIANT AND CERTIFIED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED PER ECO-17-016395	08NOV2017	IT	SH

CUSTOMIZED	11.0±0.31	1-2169315-4
NETWORKING, TALL	13.5±0.31	2169315-8
SAN	6.5±0.31	2169315-6
PCI	4.2±0.31	2169315-4
NETWORKING, SHORT	9.1±0.31	2169315-2
DESCRIPTION	DIM "A"	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MATTHEWS 28JUN2010	TE Connectivity			
DIMENSIONS: mm		CHK M. SCHMITT 28JUN2010				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. SCHMITT 28JUN2010	NAME HEATSINK SFP+ 1xN GANGED CAGES			
0 PLC ± 1 PLC ±0.1 2 PLC ±0.1 3 PLC ±0.1 4 PLC ±0.1		PRODUCT SPEC -	SIZE A200779			
MATERIAL 1 -		APPLICATION SPEC -	CAGE CODE C-2169315			
		WEIGHT -	DRAWING NO -			
		CUSTOMER DRAWING	RESTRICTED TO -			
			SCALE 3:1			
			SHEET 1 OF 1			
			REV A1			