



Connectors > PCB Connectors > PCB Headers & Receptacles > DYNAMIC 1900D HDR ASSY



Connector System: Wire-to-Board

Number of Positions: 30

Number of Rows: 2

Centerline (Pitch): 3.5 mm [ .137 in ]

PCB Mount Orientation: Horizontal

[All DYNAMIC 1900D HDR ASSY \(9\)](#)

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| Connector System                  | Wire-to-Board         |
| Header Type                       | Fully Shrouded        |
| Sealable                          | No                    |
| Connector & Contact Terminates To | Printed Circuit Board |
| PCB Connector Assembly Type       | PCB Mount Header      |

Configuration Features

|                       |            |
|-----------------------|------------|
| Number of Positions   | 30         |
| Number of Rows        | 2          |
| PCB Mount Orientation | Horizontal |

Body Features

|                       |       |
|-----------------------|-------|
| Primary Product Color | Black |
|-----------------------|-------|

Contact Features

|                                                |                |
|------------------------------------------------|----------------|
| Contact Mating Area Plating Material Thickness | .38 μm[15 μin] |
|------------------------------------------------|----------------|



|                                      |      |
|--------------------------------------|------|
| Contact Mating Area Plating Material | Gold |
| Contact Type                         | Pin  |
| Contact Current Rating (Max)         | 1 A  |

Termination Features

|                           |                       |
|---------------------------|-----------------------|
| Termination Method to PCB | Through Hole - Solder |
|---------------------------|-----------------------|

Mechanical Attachment

|                          |               |
|--------------------------|---------------|
| Mating Alignment Type    | Keyed         |
| Mating Retention         | With          |
| PCB Mount Retention Type | Retention Leg |
| Connector Mounting Type  | Board Mount   |
| Mating Alignment         | With          |
| PCB Mount Alignment      | Without       |
| PCB Mount Retention      | With          |

Housing Features

|                    |                  |
|--------------------|------------------|
| Housing Material   | Polyester GF     |
| Centerline (Pitch) | 3.5 mm [.137 in] |

Usage Conditions

|                             |                             |
|-----------------------------|-----------------------------|
| Operating Temperature Range | -30 – 105 °C [-22 – 221 °F] |
|-----------------------------|-----------------------------|

Operation/Application

|                     |                |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

|                  |           |
|------------------|-----------|
| Packaging Method | Box, Tube |
|------------------|-----------|

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                              |
|-----------------------------------------------|----------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                    |
| EU ELV Directive 2000/53/EC                   | Compliant                                    |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold      |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241) |



Candidate List Declared Against: JUNE 2024 (241)  
Does not contain REACH SVHC

|                           |                                                |
|---------------------------|------------------------------------------------|
| Halogen Content           | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Wave solder capable to 265°C                   |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 2-1871946-5  
DYNAMIC 1900D REC HSG CRIMP  
TYPE 30p

## Also in the Series | Dynamic 1000 Series




Connector Contacts(40)



Connector Hardware(3)



Insertion & Extraction Tools(2)

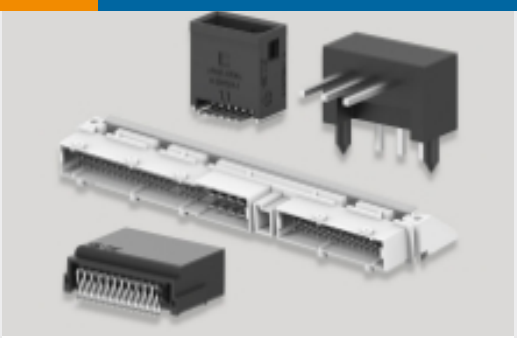

PCB Headers & Receptacles(173)



Rectangular Connector Housings(2)

Standard Rectangular Connectors(4)

Wire-to-Board Connector Assemblies & Housings(159)

Customers Also Bought

TE Part #1-2273107-1  
M12 Y conn Male to 2xM12 Female A

TE Part #T4162124005-001  
M12 A-Code Male Straight to Female Double Ended Cable

TE Part #6116075-1  
INV MJ,1X1,SHIELDED,LED (G/Y)

TE Part #174966-2  
040 MLC PLUG HSG 4P BLACK

TE Part #173682-1  
MULTILOCK, RECEPTACLE AND TAB

TE Part #1981556-1  
ME M D1100 24P-R TAB HSG ASSY

TE Part #1981560-1  
ME M D1100 24P-R PLUG CASE ASSY

Documents

Product Drawings

DYNAMIC 1900D HDR ASSY H-TYPE 30P

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2-1871935-5\_D\_c-2-1871935-5-d.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2-1871935-5\_D\_c-2-1871935-5-d.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2-1871935-5\_D\_c-2-1871935-5-d.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



---

Datasheets & Catalog Pages

DYNAMIC SPRING CLAMP SERIES

English

DYNAMIC SPRING CLAMP SERIES

Japanese

---

Product Specifications

Product Specification

Japanese

---

Agency Approvals

UL Report

English