


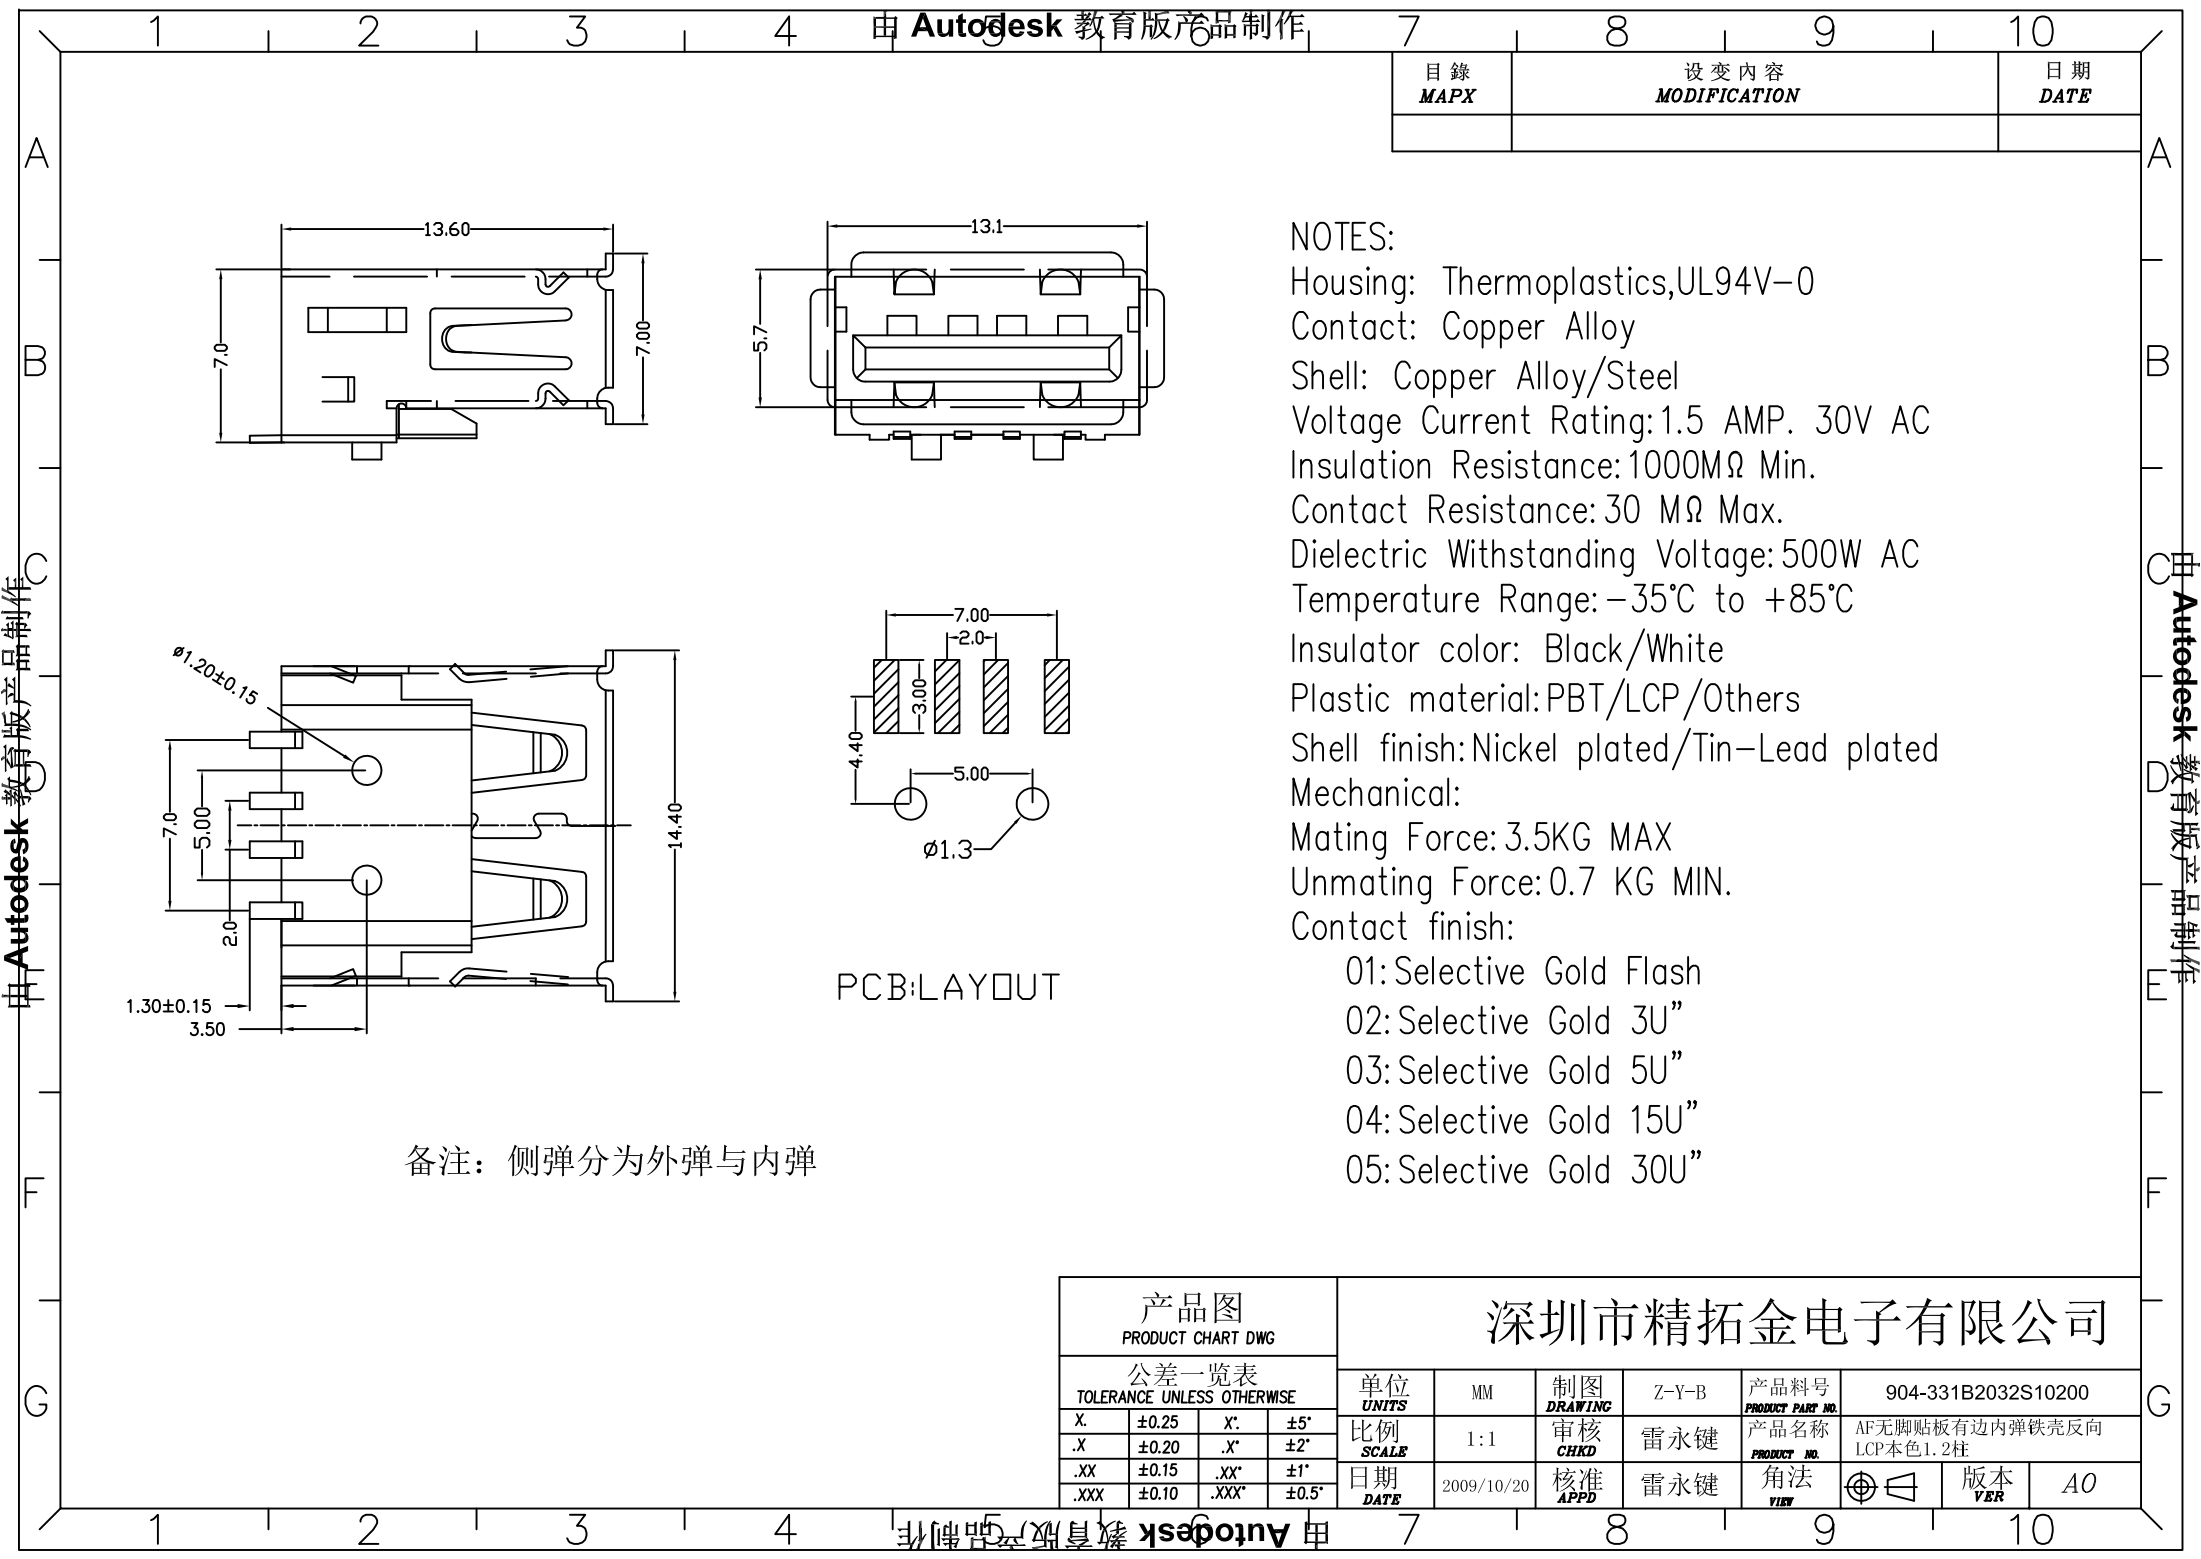

|            |                      |            |
|------------|----------------------|------------|
| 目錄<br>MAPX | 设变内容<br>MODIFICATION | 日期<br>DATE |
|            |                      |            |

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance:30 MΩ Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-35℃ to +85℃

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force:3.5KG MAX

Unmating Force:0.7 KG MIN.

Contact finish:

01:Selective Gold Flash

02:Selective Gold 3U"

03:Selective Gold 5U"

04:Selective Gold 15U"

05:Selective Gold 30U"

|                                     |       |              |       |               |            |                          |                    |
|-------------------------------------|-------|--------------|-------|---------------|------------|--------------------------|--------------------|
| 产品图<br>PRODUCT CHART DWG            |       | 深圳市精拓金电子有限公司 |       |               |            |                          |                    |
| 公差一览表<br>TOLERANCE UNLESS OTHERWISE |       | 单位<br>UNITS  | MM    | 制图<br>DRAWING | Z-Y-B      | 产品料号<br>PRODUCT PART NO. | 904-331B2032S10200 |
| X.                                  | ±0.25 | X'.          | ±5'   | 比例<br>SCALE   | 1:1        | 审核<br>CHKD               | 雷永键                |
| .X                                  | ±0.20 | .X'          | ±2'   | 日期<br>DATE    | 2009/10/20 | 核准<br>APPD               | 雷永键                |
| .XX                                 | ±0.15 | .XX'         | ±1'   | 角法<br>VIEW    |            | 版本<br>VER                | A0                 |
| .XXX                                | ±0.10 | .XXX'        | ±0.5' |               |            |                          |                    |