
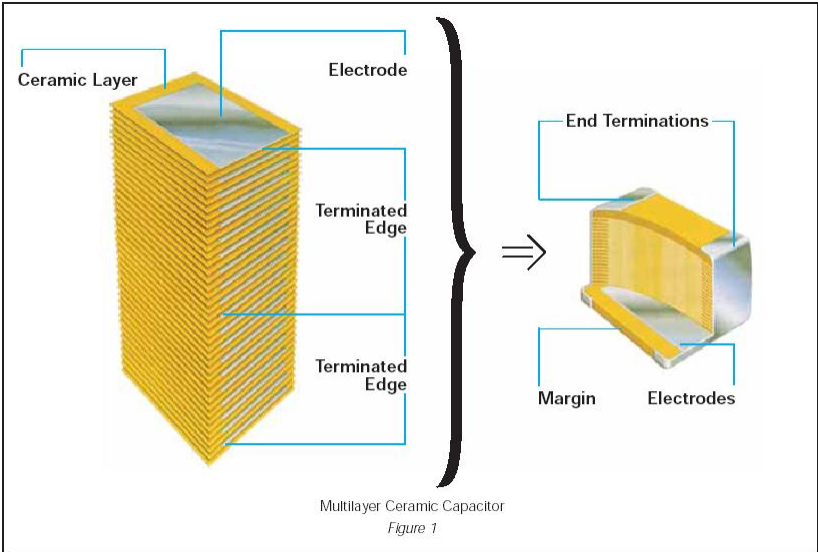


I. PART NUMBER

22207C474KAZ1A

II. MECHANICAL DIMENSION

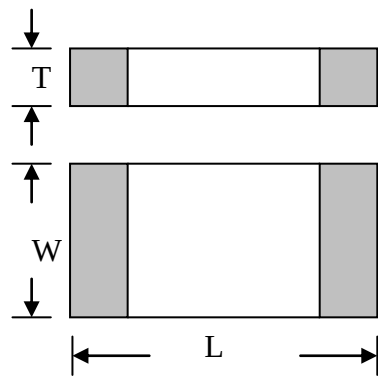

Dimension	Length (L)	Width (W)	Thickness (T)
mm	5.69 ±0.40	5.00 ±0.40	2.21 max
Inches	0.224+- .016	0.197+- .016	0.087 max

III. PERFORMANCE CHARACTERISTICS

Capacitance Value	0.47 µF
Capacitance Tolerance	K= ±10%
Dissipation Factor	2.5% max
Operating Temp. Range	-55°C to +125°C
Temperature Characteristic	± 15% (X7R)
Voltage Rating	500 VDC
Insulation Resistance	2128 MΩ min (charge device with rated voltage for 120 ±5 sec @ room temp/humidity)
Test Frequency	1.0 kHz @ 1.0 Vrms
Terminations	Flexitem, RoHS compliant