


	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		INITIAL RELEASE	2024.07.13	阿 树

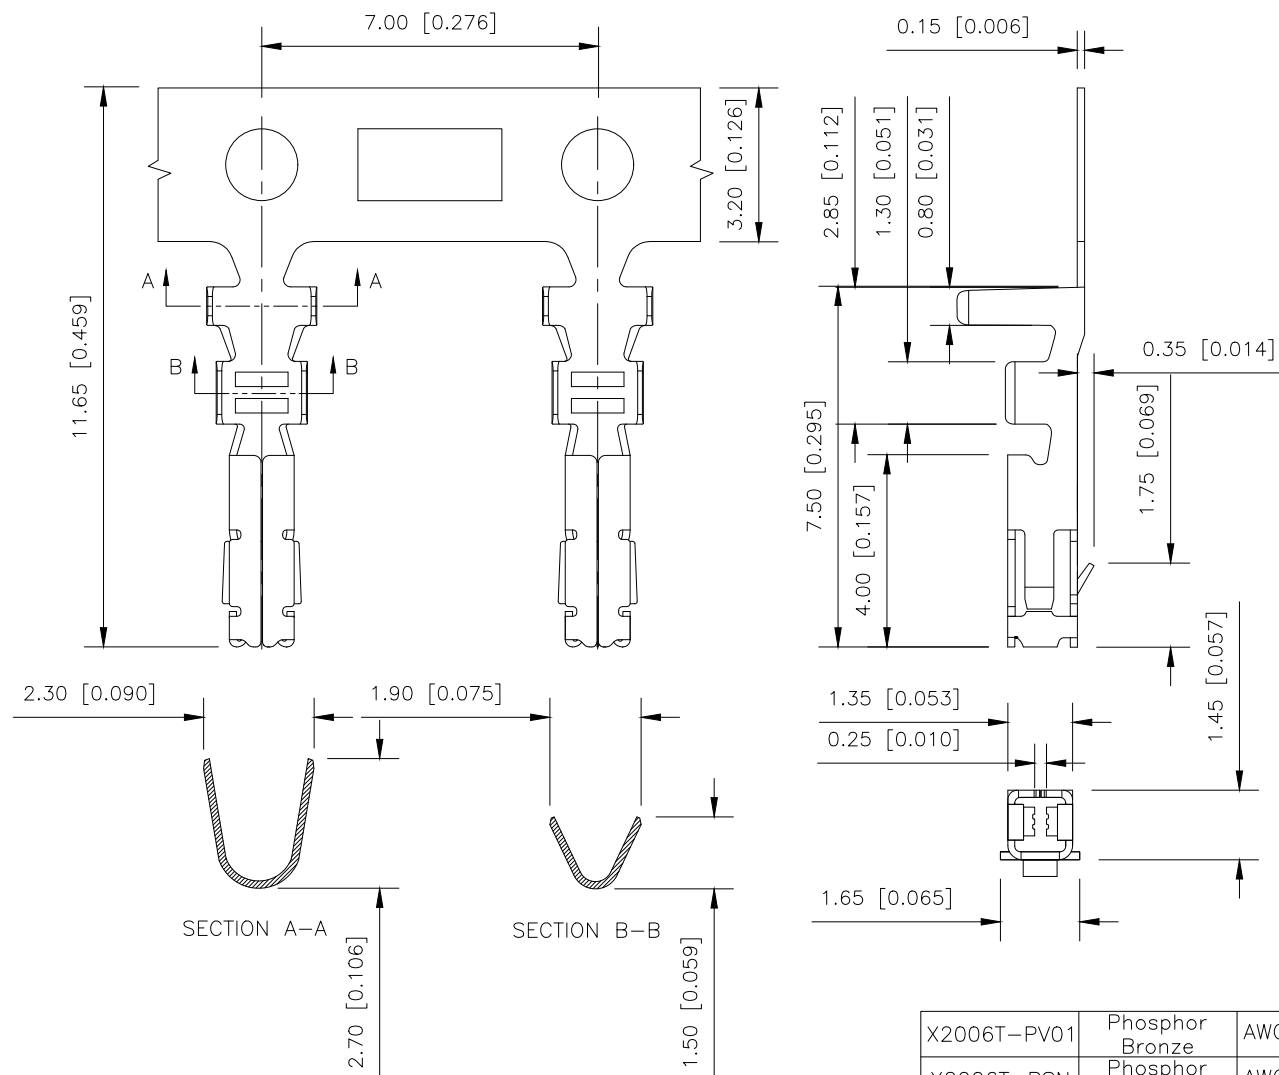

■ SPECIFICATIONS

- Voltage rating:250VAC,DC
- Current rating:3A,AC,DC
- Withstanding Voltage:1500V AC/minute
- Temperature range:−45°C+95°C
- Contact resistance:20mΩ max

PART NO.:

X2006 T-P SN
① ② ③ ④

- ① XKB Series No
- ② Category:T-Terminal
- ③ Material:Phosphor bronze
- ④ Plating Category: SN-Bright Tin
Plating V01:All Gold Flash

X2006T-PV01	Phosphor Bronze	AWG#22~28	1.5mm (Max)	Gold Flash	X2006H
X2006T-PSN	Phosphor Bronze	AWG#22~28	1.5mm (Max)	Stamping Before Pating:30u”Ni MIN;70”Sn MIN	X2006H
PART NO	Material	Wire Range	Insulation OD	Finish	Suitable XKB Housing

ANGULAR	±5°		DESIGN	阿 树	VIEW: 	MODEL TYPE: 1.5mm Crimp Style Connector		
X.	±0.40		CHECKED		UNIT: mm/in	PART NO.: X2006T-PSN		
X.x	±0.30		APPROVED		SIZE: A4	DWG NO.:		
X.xx	±0.20							
X.xxx	±0.15							
UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				SCALE N/A	PAGE 1/1	REVISION A1