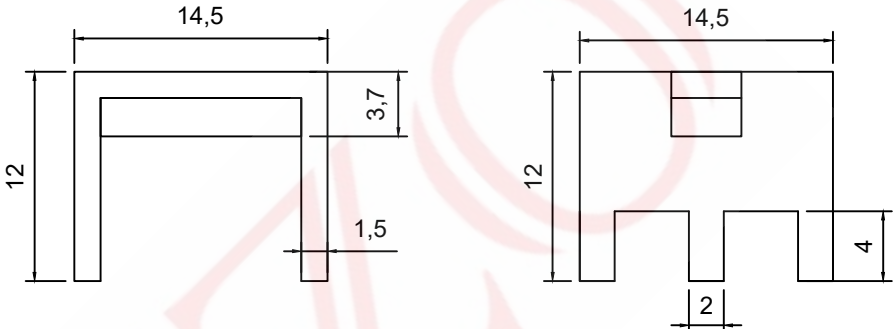
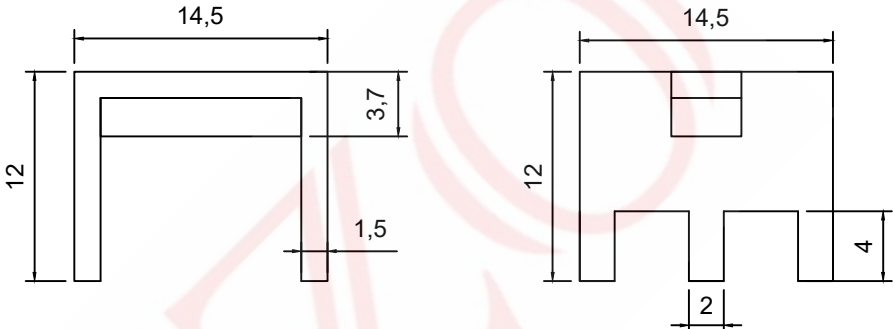


1		2		3		4		5		6		7		8							
SAMZO		REAC/ROHS								REV		ECN NO		DESRIPTION		DESIGN		APPROVAL		DATE	
										A1		NEW		Replace frame						2013.02.12	
E		技术要求: Technical requirements: 1.打铜底0.5-1UM,镍底2-2.5UM,哑锡3-5UM。 Copper base 0.5 - 1 UM, nickel base 2 - 2.5 UM, matte tin 3 - 5 UM. 2.不得有脚变形, 毛刺等缺陷。 There shall be no defects such as pin deformation and burrs. 3.插脚尖部符合可焊性要求。 The tip of the insertion pin shall meet the solderability requirements. 4.螺纹需符合通止规要求。 The thread shall meet the requirements of the go and no-go gauge. 5.材质: 紫铜T2。 Material: Red copper T2. 6.过载电流: 150A Overload current:150A 7.牙孔规格 M6 The specification of the threaded hole M6 8.未标注尺寸公差值按GB/T1184-1996H级 Unmarked dimensional tolerance values are in accordance with Grade H of GB/T1184-1996 9.螺丝扭力: 2.4Nm Screw torque: 2.4Nm 10.盐雾试验: 48小时 Salt spray test: 48H																			
D																					
C																					
B		