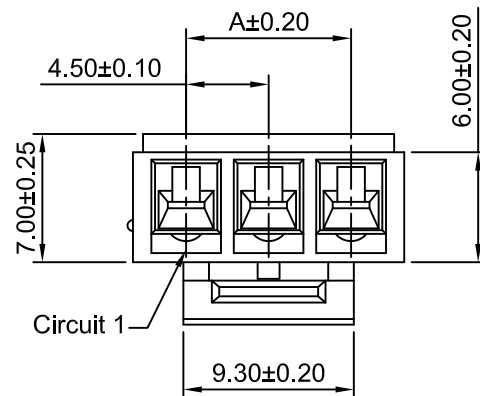



Ordering Information:

C4501HF-XP - **
1 2


1.Part NO.

2.Material:


(Blank):Nylon 66,UL94V-0(White)

V2:Nylon 66,UL94V-2(Natural)



GWT:Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

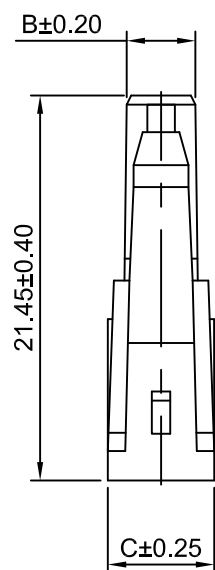

1P

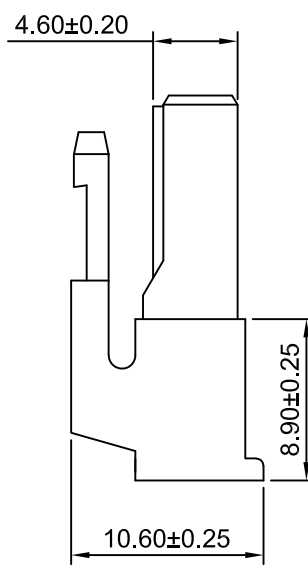

2P~3P

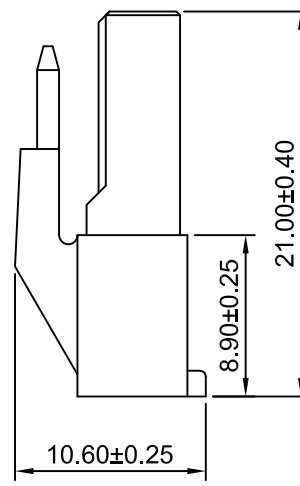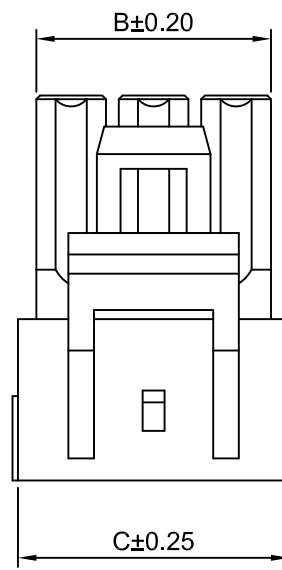

SPECIFICATIONS:

Current Rating: 10A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 7mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
1P	---	3.80	5.80	3P	9.00	12.80	14.80
2P	4.50	8.30	10.30				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

	Unit	Scale	Sheet	TITLE 4.50MM PITCH HOUSING
	mm	2.5:1	1 of 1	
2	DRWN	CHK'D	APPR	
8	Wenmin Luo	Diankui Wan	Jack Yin	
7	General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C4501HF-XP
6	x, x±0.25			
	x, xxx±0.20			
4	x, xxx±0.15			
	ANGLES ±1°			
				REV A4

REV	DESCRIPTION	DATE
A4	CHANGE THE DRAWING	2022.06.22
A3	CHANGE THE DRAWING	2022.04.08
A2	CHANGE THE DRAWING	2021.11.17
A1	CHANGE THE DRAWING	2021.04.06
A0	NEW RELEASE	2015.04.14