

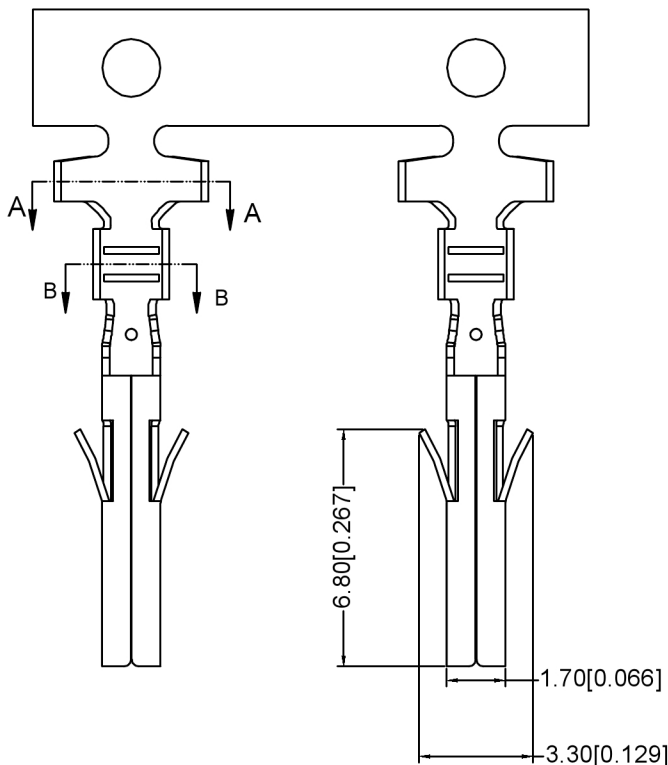


A-A



B-B

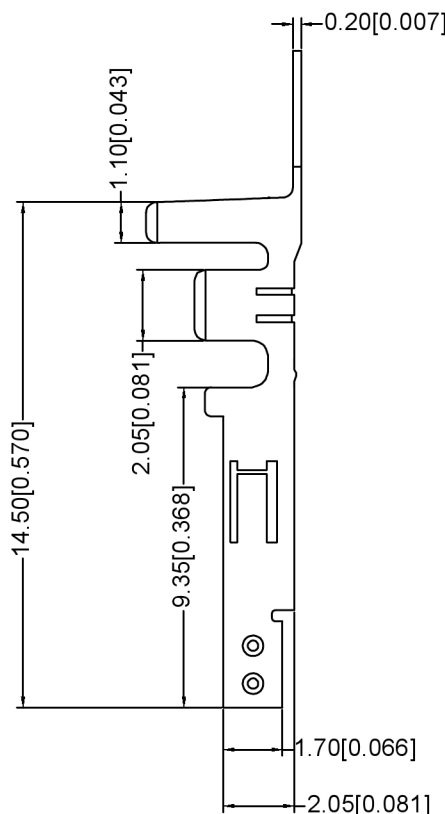

Specifications:

规格:

Voltage rating: 600V AC/DC

额定电压: 600V AC/DC

Current rating: 9A AC/DC

额定电流: 9A AC/DC

Withstanding voltage: 1500V AC/minute

耐受电压: 1500V AC/分钟

Temperature range: -25°C ~ +85°C

温度范围: -25°C ~ +85°C

Insulation resistance: ≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance: ≤10mΩ

接触电阻: ≤10mΩ

After environmental testing: ≤20mΩ

环境测试后: ≤20兆欧

X9357 T F -X SN X-H
01 02 03 04 05 06 07

01 Series Number

02 Category: T-terminal

03 Shape: F-Female

04 Material: B-Brass; P-Phosphor Bronze

05 Plating style: SN-Bright tin plating

06 Plating method:

Blank-Stamping before plating;

07 Special No: H-High Leads

X9357TF-PSN-H	Phosphor Bronze	AWG#16-24	3.10mm(Max)	Stamping Before Plating :30u" MIN.	X9357HM
X9357TF-BSN-H	Brass			Ni70u"Sn MIN.	
PART NO	Material	Wire Range	Insulation O.D	Finish	Suitable XKB

广东星坤科技股份有限公司	
姓名	日期
ΔX	ΔX
ΔX	ΔX
MARK	DESCRIPTION
文件工程章	
REVISIONS	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn	

					ANGULAR	±5°
					L ≤ 4	±0.2
					4 < L ≤ 16	±0.3
					16 < L ≤ 63	±0.4
					L > 63	±0.5
					UNSPECIFIED TOLERANCES	

XKLB

XKB INDUSTRIAL PRECISION CO., LIMITED

DSND		SCALE: N/A	MODEL TYPE: 4.2mm Crimp Style Connector
DWN		VIEW:	PART NO.: X9357TF-BSN-H
CHKD		UNIT: mm/in	DWG NO.: X-X9357TF-BSN-H
APPD		SIZE: A4	
		WEIGHT	SHEET
			1/1
		REVISION	A0