




Connectors > Automotive Connectors > Automotive Housings > Timer Connector Housing

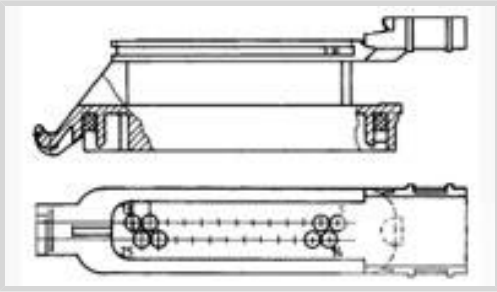

Connector System: **Wire-to-Board, Wire-to-Device**

Number of Positions: **25**

Connector & Housing Type: **Housing for Male Terminals**

Centerline (Pitch): **5 mm [.197 in]**

Sealable: **Yes**

[All Timer Connector Housing \(515\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Board, Wire-to-Device
Connector & Housing Type	Housing for Male Terminals
Sealable	Yes
Primary Locking Feature	On the Terminal

Configuration Features

Number of Positions	25
Number of Rows	2

Electrical Characteristics

Operating Voltage	24 VDC
Nominal Voltage Architecture	12 V, 24 V

Body Features

Cable Exit Angle	90°
Primary Product Color	Black

Contact Features

Contact Size	2.8mm
--------------	-------



Mechanical Attachment

Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PA GF
Centerline (Pitch)	5 mm [.197 in]

Dimensions

Connector Height	39.6 mm [1.559 in]
Product Width	25 mm [.984 in]
Product Length	100.3 mm [3.949 in]
Row-to-Row Spacing	5.7 mm [.224 in]

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C [158 °F] [167 °F] [176 °F] [185 °F] [194 °F] [212 °F] [221 °F]
Operating Temperature Range	-30 – 105 °C [-22 – 221 °F]

Industry Standards

Degree of Protection	IP54K
----------------------	-------

Packaging Features

Packaging Method	Box
------------------	-----

Other

Serviceable	No
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	



Current ECHA Candidate List: JUNE 2024
(241)
Candidate List Declared Against: JAN 2024
(240)
Does not contain REACH SVHC

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 281812-1
COVER FOR 25W. SPLASH PROOF CO



TE Part # 826777-1
SEALING




TE Part # CAT-LMPH9507
Low & Medium Power Header




TE Part # 281811-2
25W. SPL. PROOF CONN. HOUSING


Also in the Series | Junior Timer




Automotive Housings(55)

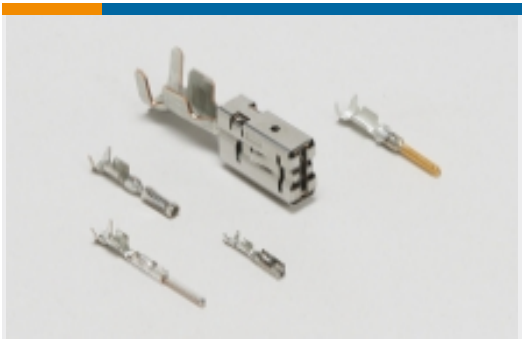

Automotive Terminals(15)




Busbars & Terminals(1)



Connector Seals & Cavity Plugs(1)

Customers Also Bought



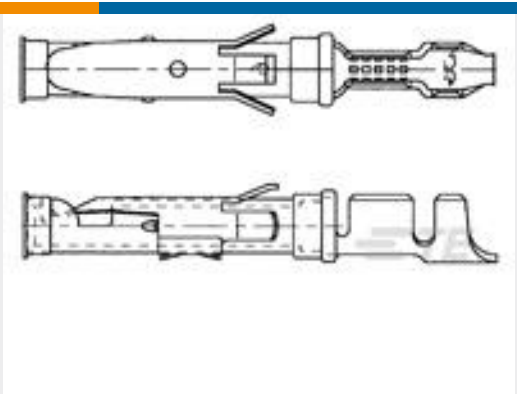

TE Part #163084-2
062 SOC.ASS. TYP3+




TE Part #1-967626-4
Timer Connector Housing



TE Part #770377-1
UMNL II KEYING PLUG



TE Part #40725
RING 190(4.82MM)TERMINAL 18-14
AWG TPBR

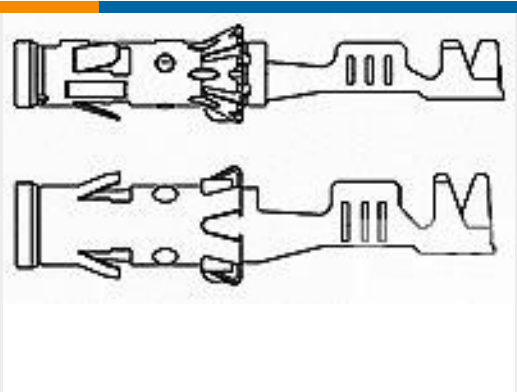

TE Part #929989-1
1,5MM SOCK CONTACT



TE Part #2278598-1
12POS MQS REC



TE Part #1333206-8
ANVIL, COMBINATION (.100)



TE Part #794939-1
04P MINI UMNL CAP HSG

Documents

Product Drawings

JUNIOR TIMER WIRE SEAL CO

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_281810-1_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_281810-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_281810-1_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Product Specification

English

2-7-15 WAY SPLASE-PROOF CONNECTORS

English