


Countersunk head Tap-Fix screws - PoziDriv®

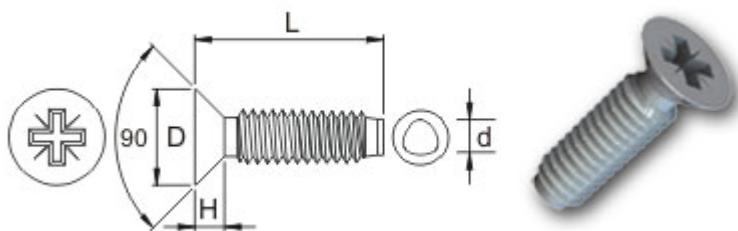

For metals
Three-lobed threadform

Materials and Finishes

Case hardened steel/Zinc & clear de-embrittled

Dimensions

d	M2.5	M3	M3.5	M4	M5	M6
D	4.7	5.6	6.5	7.5	9.2	11
H	1.5	1.65	1.93	2.2	2.5	3
Recess - min	1.22	1.48	1.34	1.6	2.05	2.46
Penetration - max	1.47	1.73	1.8	2.06	2.51	2.92
Recess No.	1	1	2	2	2	3

Preferred Lengths

		Thread (d)					
		M 2.5	M 3	M 3.5	M 4	M 5	M 6
Length (L)	5						
	6	ST	ST				
	8	ST	ST		ST		
	10	ST	ST		ST	ST	
	12		ST		ST	ST	ST
	16				ST	ST	ST
	20				ST	ST	ST
	25				ST	ST	ST
	30				ST	ST	ST
	35						ST
	40						ST
	50						

ST - Steel, Zinc & clear

A2 - Stainless steel