

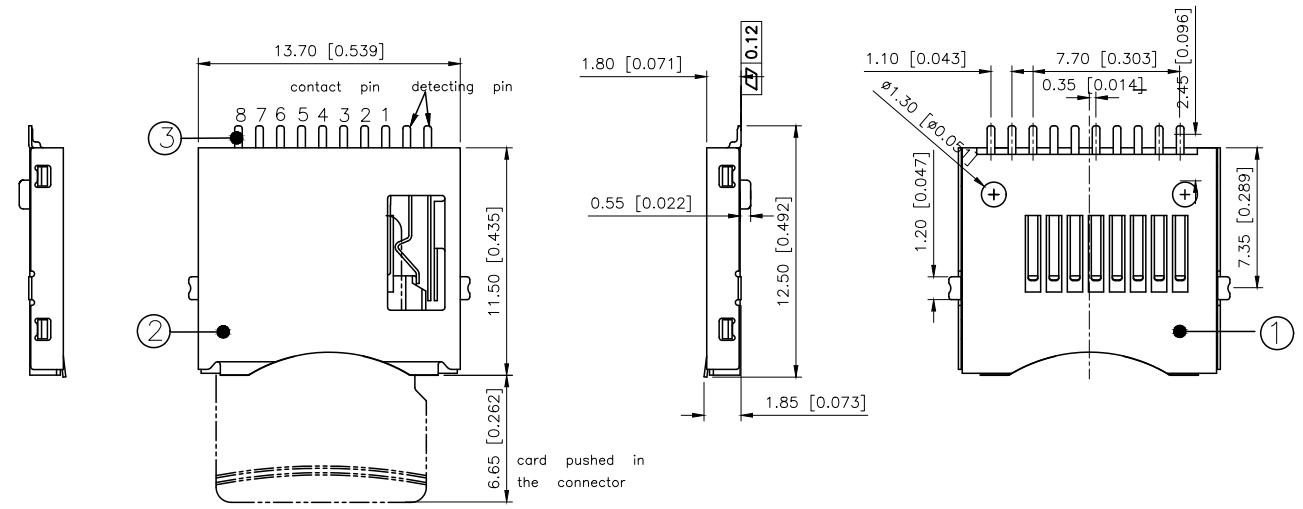
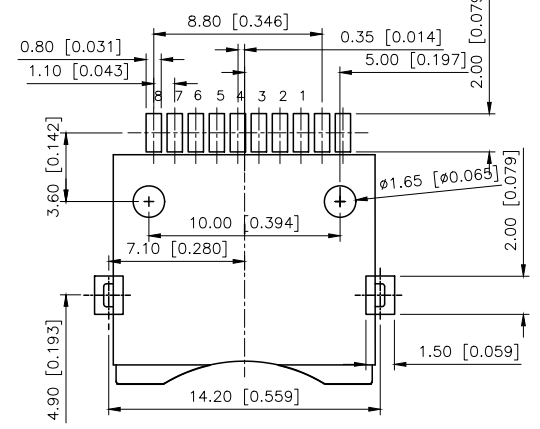



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.05.16	阿树

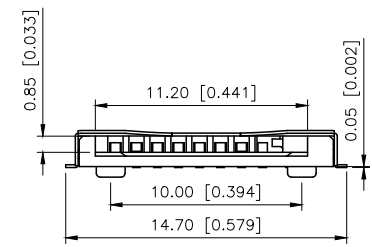

1. ELECTRICAL CHARACTERISTICS
1-1. CONTACT RESISTANCE: 50 milliohms MAX.
1-2. INSULATION RESISTANCE: 1.000 Megohms MIN.
1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
2-1. RETENTION FORCE: MIN. 100gf/PIN
2-2. RoHS 2002/95/EC COMPLIANT.
3. RESISTANCE TO REFLOW SOLDERING HEAT: 260°C Max

WITHOUT CARD, SWITCH OPENED IN THE CONNECTOR;
WHEN CARD PUSHED-IN, SWITCH WAS CLOSED

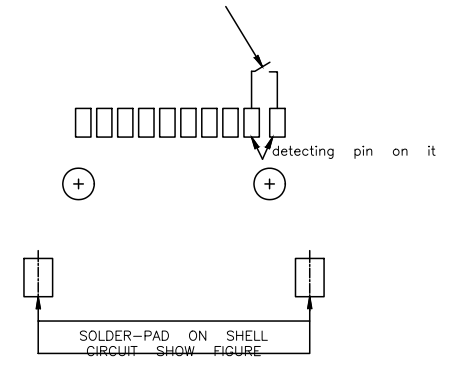

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
GENERAL TOLERANCE ±0.05

Pin No.	NAME	TYPE
1	DAT 2	I/O/PP
2	CD/DAT 3	I/O/PP
3	CMD	PP
4	VDD	S
5	CLK	I
6	VSS	S
7	DAT0	I/O/PP
8	DAT1	I/O/PP

ITEM	PAPT	NAMF	QTY	MATERIAL	FINISHING
③	Shell	1	BRASS		
②	Terminal	10	BRASS		
①	Housing	1	LCP UL 94V-0	BLACK	

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE: TF CARD CONN
CHECKED		UNIT: mm/in	PART NO.: XKTF-005
APPROVED		SIZE: A4	DWG NO.: