

https://www.phoenixcontact.com/us/products/1049503



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Flange, with screw-on fixing, depth: 17.7 mm, width: 7.7 mm, height: 21.6 mm, color: gray, mounting type: Screw mounting

Your advantages

· Easy marking options

Commercial data

| Item number | 1049503 |
|--------------------------------------|---------------------|
| Packing unit | 30 pc |
| Minimum order quantity | 30 pc |
| Sales key | BE09 |
| Product key | BEAZ11 |
| Catalog page | Page 428 (C-1-2019) |
| GTIN | 4055626661087 |
| Weight per piece (including packing) | 1.65 g |
| Weight per piece (excluding packing) | 1.6 g |
| Customs tariff number | 85369010 |
| Country of origin | PL |



https://www.phoenixcontact.com/us/products/1049503



Technical data

Product properties

| Product type | Mounting material |
|------------------------|-------------------|
| Data management status | |
| Article revision | 00 |

Connection data

| Tightening torque | 0.2 Nm |
|-------------------|--------|

Dimensions

| Dimensional drawing | 9,55 |
|---------------------|---------|
| Width | 7.7 mm |
| Height | 21.6 mm |
| Depth | 17.7 mm |
| Hole diameter | 4.7 mm |

Material specifications

| Color | gray (RAL 7042) |
|--|-----------------|
| Material | PA |
| Flammability rating according to UL 94 | V0 |

Environmental and real-life conditions

Ambient conditions

| Ambient temperature (operation) | -60 °C 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
|--|--|
| Ambient temperature (storage/transport) | -25 °C 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C 70 °C |
| Ambient temperature (actuation) | -5 °C 70 °C |
| Permissible humidity (operation) | 20 % 90 % |
| Permissible humidity (storage/transport) | 30 % 70 % |

Mounting


| • | | |
|---------------|----------------|--|
| Mounting type | Screw mounting | |

1049503


https://www.phoenixcontact.com/us/products/1049503



Drawings

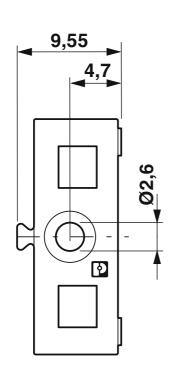

Dimensional drawing





https://www.phoenixcontact.com/us/products/1049503



Classifications

ECLASS

| ECLASS-11.0 | 27370419 |
|-------------|----------|
| ECLASS-12.0 | 27370419 |
| ECLASS-13.0 | 27250302 |
| ETIM | |
| ETIM 9.0 | EC001041 |
| LINEDCO | |

UNSPSC



https://www.phoenixcontact.com/us/products/1049503



Environmental product compliance

EU RoHS

| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--|
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com