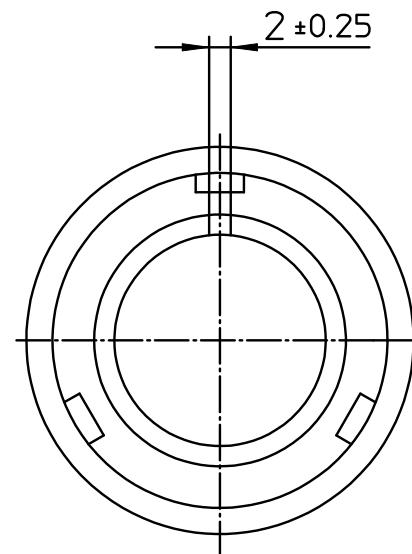
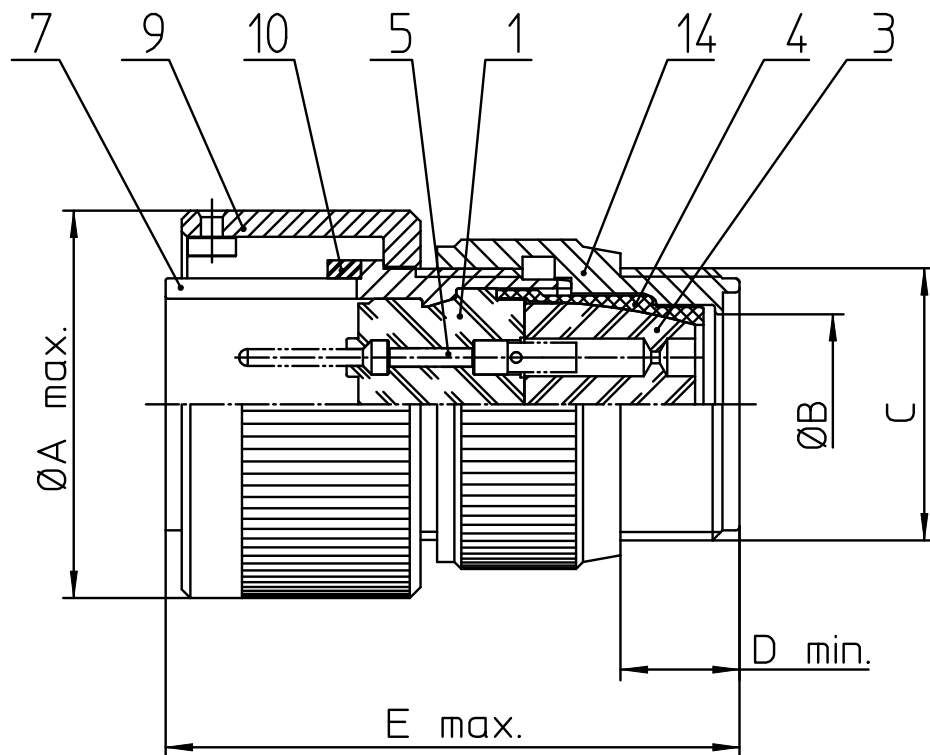


| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 29.2              |
| B   | 11.1              |
| C   | 3/4-20UNEF-2A     |
| D   | 9.5               |
| E   | 45                |

| NO. | BESCHREIBUNG / DESCRIPTION           |
|-----|--------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN  |
| 3   | DICKTKÖRPER / GROMMET                |
| 4   | ENDRING / ENDRING                    |
| 5   | KONTAKTSTIFT/ CONTACT PIN            |
| 7   | ZYLINDERGHÄUSE / BARREL              |
| 9   | ÜBERWURFMUTTER / COUPLING NUT        |
| 10  | DICHTRING FRONT / FRONT SEALING RING |
| 14  | F-ENDGEHÄUSE / F-ENDBELL             |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.  
 Specification and Dimensions subject to change  
 Drawings illustrate normal insulator positioning

|                                                              |
|--------------------------------------------------------------|
| <b>Material Specification:</b>                               |
| Shell Material: Aluminium alloy                              |
| Shell Plating: Olive drab chromate over cadmium (conductive) |
| Insulator Material: CR-Elastomere                            |
| Contact Material: Copper alloy                               |
| Contact Plating: Hard silver                                 |

all dimensions are in mm  
 Dimensions without tolerance indications are general tolerances in acc. with DIN7168m  
 drawing for  
 CUSTOMER



description CA3106F14S-5P-B  
 Plug, straight  
 Endbell for flex tube  
 Solder Cup / Pin / Layout: 14S-5

© All rights reserved. Reproduction or issue to third in any form  
 whatever is only permitted with written authorization of ITT Cannon



page 1/1  
 revision 3765 3. Sep 24