





Series E1.20 | Snap-open along outer radius | Lids open reciprocally


Snap-open along outer radius	<i>Bi</i> [mm]	<i>Ba</i> [mm]	<i>R</i> Bending radii [mm]	Weight [kg/Segment]
E1.20.015. <i>R</i> .0	15	22	028	≈ 0,0443

Supplement Part No. with required radius (*R*). Example: E1.20.15.028.0

Dimensions

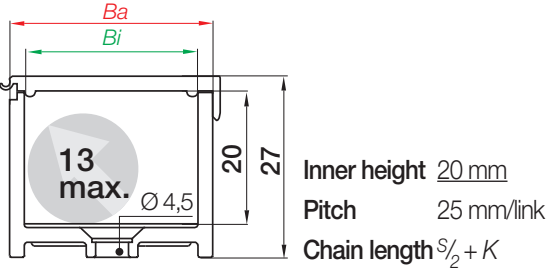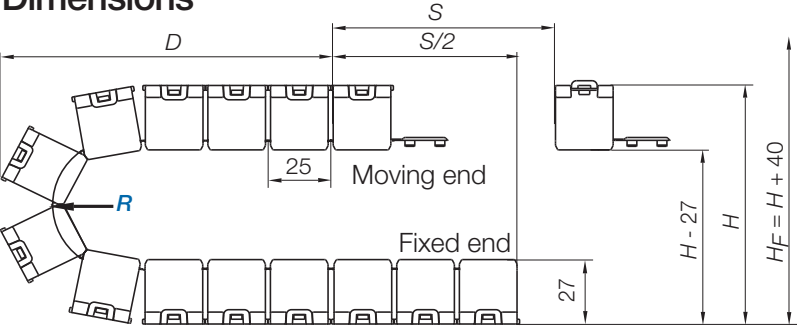

Series	Segment length Dim. A [mm]	No. of links/Segment	No. of Segments/m
E1.20.015. <i>R</i> .0	250	10	4 (1000 mm)



<i>R</i>	028
<i>H</i>	92
<i>D</i>	76
<i>K</i>	120

The required clearance height: $H_F = H + 40 \text{ mm}$

More radii available upon request,
please consult igus® for delivery time!