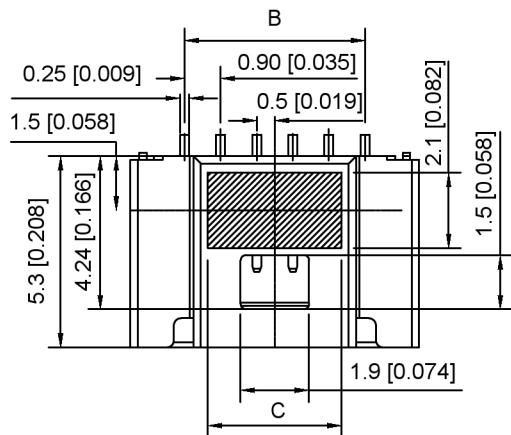


Specifications:

规格:

Voltage rating:100V AC/DC

额定电压: 100V AC/DC

Current rating:1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage:300V AC/minute

耐受电压: 300V AC/分钟

Temperature range:-40℃~+105℃

温度范围: -40℃~+105℃

Insulation resistance:≥100MΩ

绝缘电阻: ≥100MΩ







Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

X1004 W R S - XX A HF - 4T SW

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- 1.Series No
- 2.Category:W-Wafer
- 3.Welding Board Angle: R-Stright 90°
- 4.Welding Way:S-SMT
- 5.Row No.Pin No:XX-02-15 Pin
- 6.Special No:A-Inner Lock
- 7.HF-Halogen Free
- 8.Material:4T-PA4T UL94V-0
- 9.Plating:SW-Matte Tin Plating 100u" Min.overall, Ni 50u"Min.under Plating V01-Gold Flash overall,Ni 50u Min under Plating

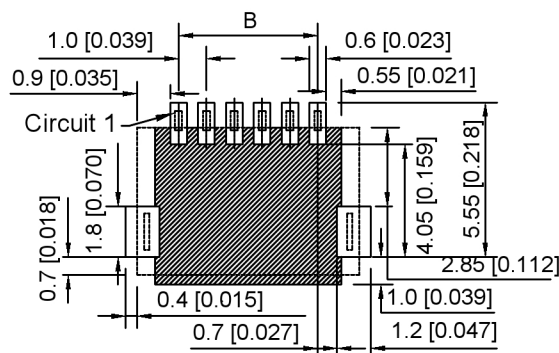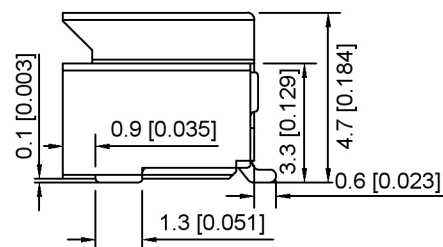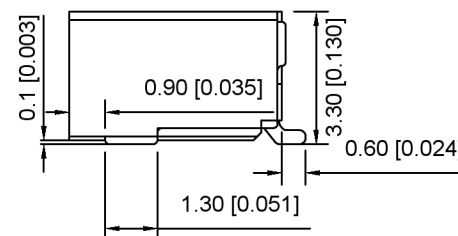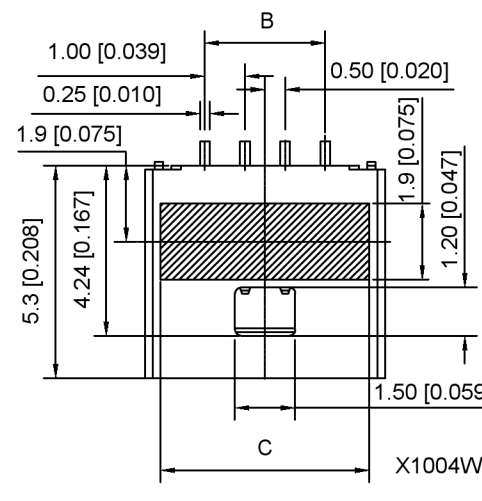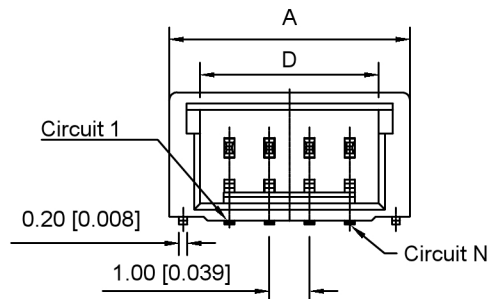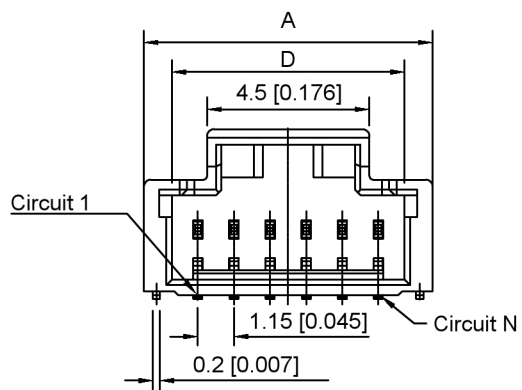

Poles	Dimensions(mm)			
	A	B	C	D
02	4.00	1.00	3.20	2.45
03	5.00	2.00	4.20	3.45
04	6.00	3.00	5.20	4.45
05	7.00	4.00	6.20	5.45
06	8.00	5.00	3.70	6.45
07	9.00	6.00		7.45
08	10.00	7.00		8.45
09	11.00	8.00		9.45
10	12.00	9.00		10.45
11	13.00	10.00		11.45
12	14.00	11.00		12.45
13	15.00	12.00		13.45
14	16.00	13.00		14.45
15	17.00	14.00		15.45

X1004WRS-XXAHF-4TSW	PA4T	Phosphor Bronze	X1004H-A
PART NO	Material	Material(Pin)	Suitable XKB Housing

Recommended PCB Layout:±0.05

X1004WRS-XXAHF-4T SW

06-15Pin

广东星坤科技股份有限公司

文件工程章

MARK DESCRIPTION REVISIONS DATE REVISED APPROVED

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5
UNSPECIFIED TOLERANCES	

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND	SCALE: N/A	MODEL TYPE: 1.0mm Crimp Style Connector
DWN	VIEW: ④	PART NO.: X1004WRS-XXAHF-4TSW
CHKD	UNIT: mm/in	DWG NO.: X-X1004WRS-XXAHF-4TSW
APPD	SIZE: A4	WEIGHT SHEET REVISION
		1/1 A0