



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: **Disconnect**

Modular Terminal Block Product Type: **PI-Spring Terminal Block**

Primary Product Color: **Gray**

Product Spacing: **5.2 mm [.205 in]**

Number of Positions: **2**

Features

Product Type Features

Modular Terminal Block Product Type	PI-Spring Terminal Block
-------------------------------------	--------------------------

Configuration Features

Gauge Type	A2 / 2.3 mm Dia.
Number of Levels	1
Number of Circuits	1
Block Function	Disconnect
Number of Positions	2

Electrical Characteristics

Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	300 V
Impulse Withstanding Voltage Rating (IEC)	6000 V
Voltage Rating (CSA)	300 V
Current Rating (CSA)	14 A
Power Loss	1.6 W
Short-Time Withstanding Current Rating @ 1s	300 A



Voltage Rating (IEC)	630 V
Current Rating (UL)	20 A
Current Rating (IEC)	20 A
Operating Voltage	300 VAC

Body Features

Product Weight	8.1 g[.319 oz]
Primary Product Color	Gray

Termination Features

Termination Method to Wire & Cable	Spring Terminal
------------------------------------	-----------------

Mechanical Attachment

DIN Rail Mounting Type	TH35-15, TH35-7.5
Terminal Block Disconnect Type	Blade
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide
------------------	-----------

Dimensions

Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp	.2 – 4 mm²
Main Circuit Capacity - Twin Ferrule per Spring Clamp	.22 – .5 mm²
Wire Stripping Length	11 mm[.433 in]
Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp	.22 – 2.5 mm²
Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp	26 – 14 AWG
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.22 – 2.5 mm²
Tool Size	3.5 mm[.138 in]
Product Depth	44.2 mm[1.74 in]
Product Length	44.2 mm[1.74 in]
Product Height	65.3 mm[2.571 in]
Product Spacing	5.2 mm[.205 in]
Wire Size	2.5 mm²

Usage Conditions

Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]



Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

IP Rating	IP20
UL Flammability Rating	UL 94V-0

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer








This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


1SNK705310R0000

Disconnect, PI-Spring Terminal Block, Gray, Product Spacing 5.2 mm [.205 in], 2 Position, Spring Terminal, ENTRELEC SNK, Modular Terminal Blocks

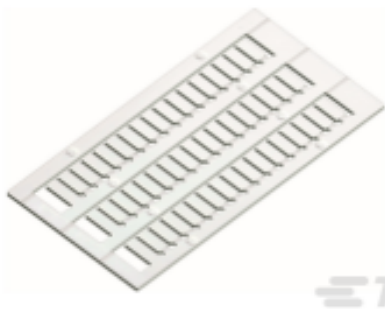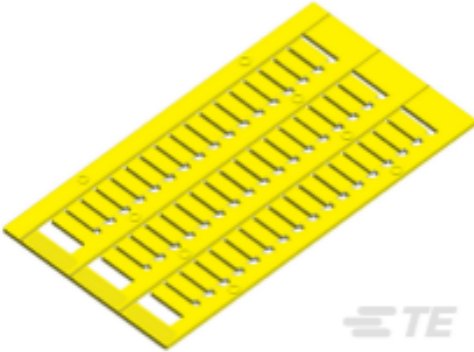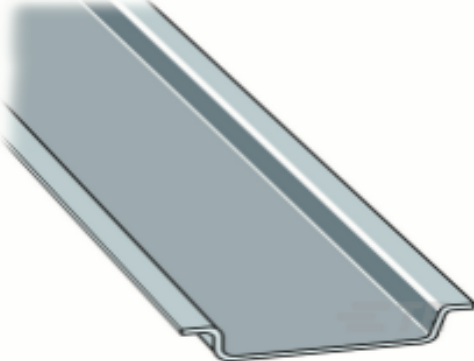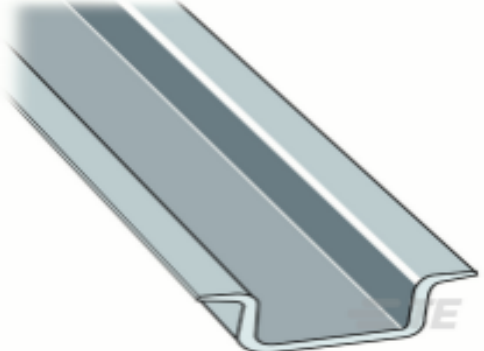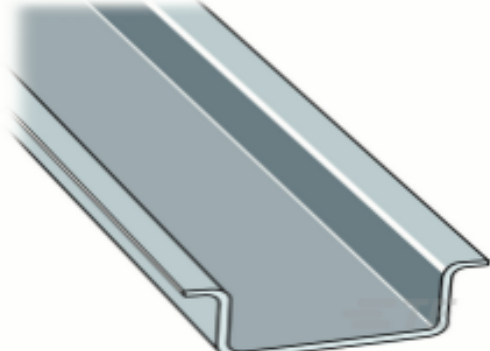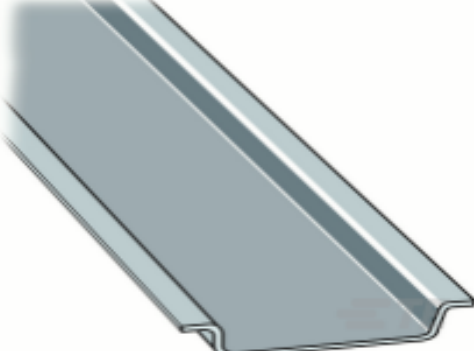

 TE Part # 1SNK140000R0000 MC512	 TE Part # 1SNK140004R0000 MC512-YL	 TE Part # 1SNK705911R0000 EK2.5-3P	 TE Part # 1SNK900001R0000 BAM4
 TE Part # 1SNK900002R0000 BAZ1	 TE Part # 1SNK900102R0000 BAZH1	 TE Part # 1SNK900107R0000 CS-R3	 TE Part # 1SNK900200R0000 TC5
 TE Part # 1SNK900203R0000 TP2	 TE Part # 1SNK900205R0000 TP4	 TE Part # 1SNK900601R0000 SHBP	 TE Part # 1SNK900606R0000 LH-J
 TE Part # 1SNK905302R0000 JB5-2	 TE Part # 1SNK905303R0000 JB5-3	 TE Part # 1SNK905305R0000 JB5-5	 TE Part # 1SNA164800R0300 PR3.G2
 TE Part # 1SNA168500R1200 PR4	 TE Part # 1SNA168700R2200 PR5	 TE Part # 1SNA173220R0500 PR30	 TE Part # 1SNA174300R1700 PR3.Z2

Also in the Series | ENTRELEC SNK

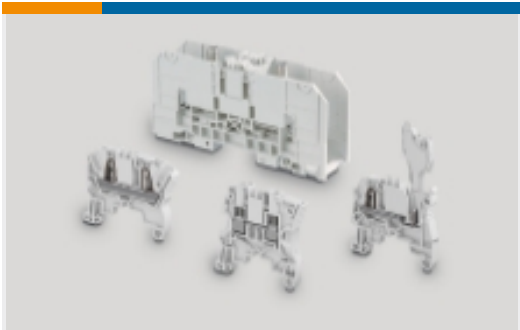

Modular Terminal Blocks(320)



Terminal Block & Strip Conducting Accessories(67)



Terminal Block & Strip Insulating Accessories(31)

Customers Also Bought



TE Part #34151
PG R 22-16 COMM 22-18 MIL 5/16



TE Part #1SNK705910R0000
EK2.5



TE Part #1SNK705960R0000
EK2.5-D2




TE Part #1SNA163350R1500
PRH2R




TE Part #1SNA193251R2500
SCH1



TE Part #1SNA179726R0200
AJS9

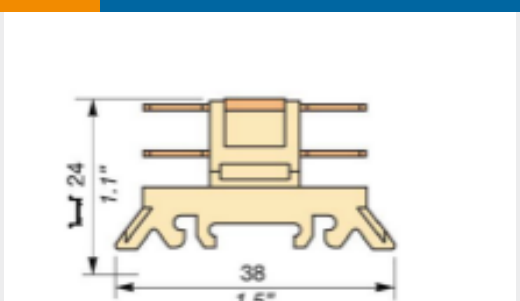

TE Part #1SNA192856R1300
H6/10.2G.2G



TE Part #1SNA399787R0500
CPBP2



TE Part #1SNA193151R1100
FJH32



TE Part #1SNA197312R1600
CPM

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK705310R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK705310R0000_A.3d_igs.zip

1SNK705310R0000

Disconnect, PI-Spring Terminal Block, Gray, Product Spacing 5.2 mm [.205 in], 2
Position, Spring Terminal, ENTRELEC SNK, Modular Terminal Blocks



English

Customer View Model

[ENG_CVM_CVM_1SNK705310R0000_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[ENTRELEC Terminal Block - Master Catalog](#)

[ENTRELEC Terminal Block - Master Catalog](#)

English

[ZK2.5-S](#)

English

[SNK SERIES TERMINAL BLOCKS](#)

English

[ENTRELEC Terminal Blocks Catalogue \(RUS\)](#)

[Essential Entrelec Terminal Blocks](#)

French

[Essential Entrelec Terminal Blocks](#)

English

[Essential Entrelec Terminal Blocks](#)

Japanese

Agency Approvals

[Bureau Veritas Marine and Offshore Certificate](#)

English