
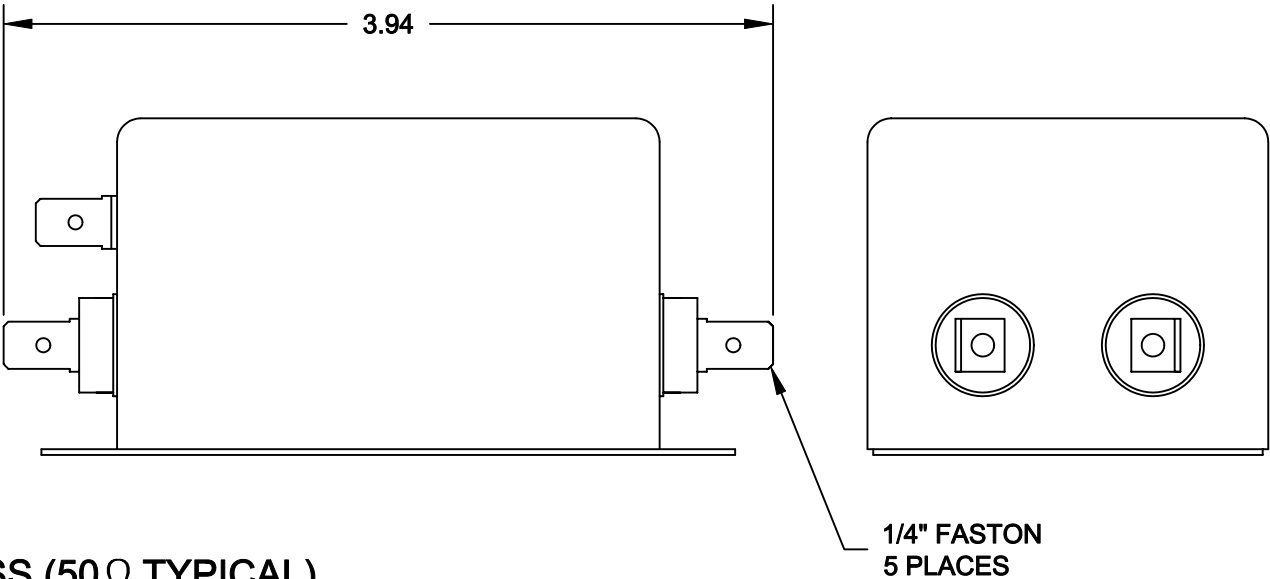
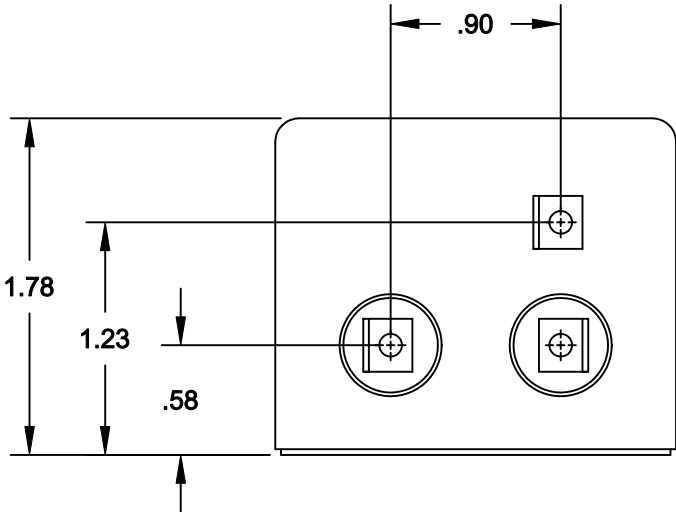


SPECIFICATIONS


- 1. CASE:
22 GA. (.030) CRS, TIN PLATED
- 2. RATED CURRENT:
10A
- 3. RATED VOLTAGE:
250VAC, 50/60Hz
- 4. TEST VOLTAGE:
LINE TO LINE: 1.7KVDC
LINE TO GROUND: 2.2KVDC
- 5. LEAKAGE CURRENT:
.8mA @250VAC, 50 Hz

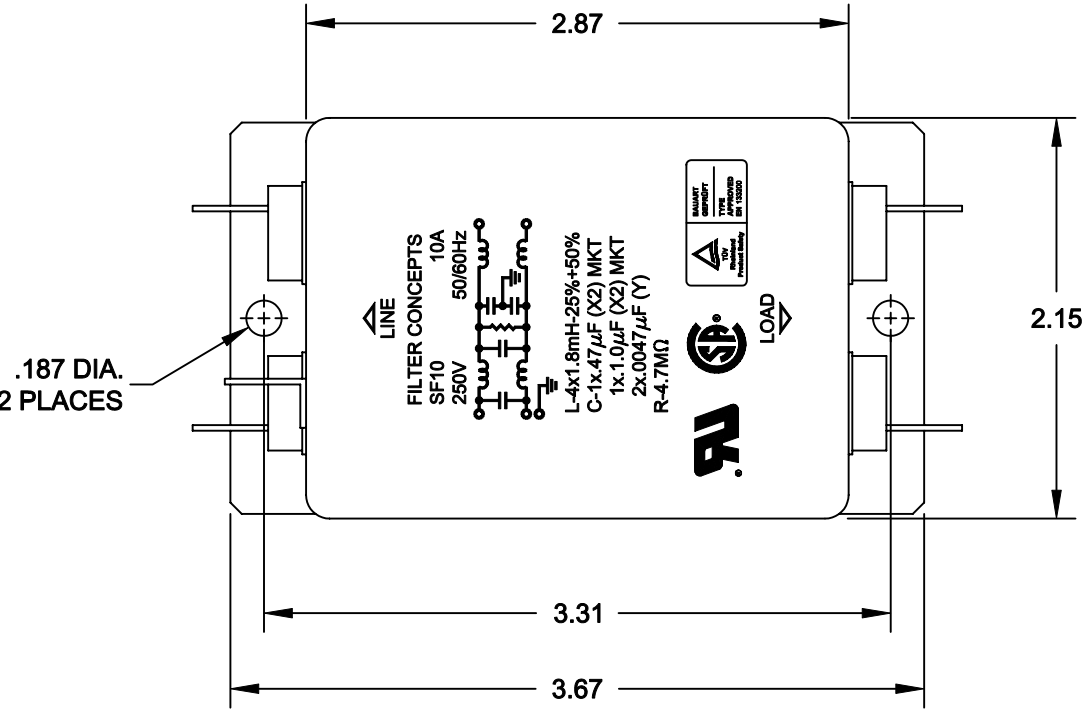

INSERTION LOSS (50Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	20 MHz
L/L	18 db	45 db	50 db	60 db	65 db	60 db
L/G	6 db	45 db	65 db	65 db	65 db	60 db

SCHEMATIC

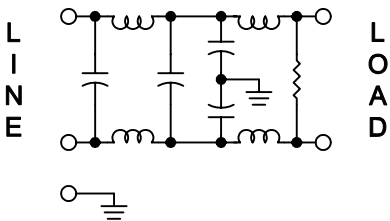

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± .XXX ±.010	CONTRACT NO.		FILTER CONCEPTS INC.		
	APPROVALS	DATE			
	DRAWN GIANG TRINH	04-08-02	APPLICATION DRAWING SF10 FILTER		
	CHECKED DANNIEL VUONG	04-08-02			
	MATERIAL		SIZE B	CODE IDENT NO.	DRAWING NO. 7252
FINISH			SCALE 1/1		SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Astrodyne TDI:](#)

[SF10](#)