

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE31410403~05	2014-01-09	Tony_leng	Change Ball No. & Wire Length

8-04PFFS-SH7AXX 

XX: 150~1500mm

15: 150mm




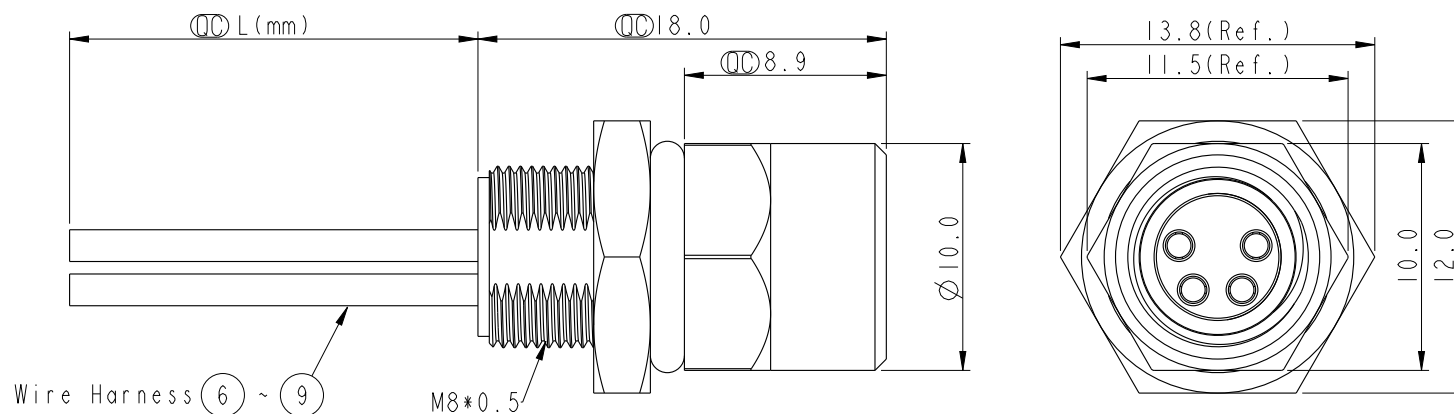

30: 300mm

50: 500mm

A0: 1000mm

A5: 1500mm

Wire Length(L): 150~1500mm

Pin Assignment
Front ViewRecommended
Panel Cut-Out

4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

Note:

- *  Important Dimension.
- * Waterproof Rate: IP67
- * Connector: Nylon+GF, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Shield: Zinc Alloy, Nickel Plated
- * Nut: Copper Alloy, Nickel Plated
- * O-Ring1: VITON, Green
- * O-Ring2: EPDM, Black
- * Wire Harness: UL1007, 24AWG
- * For Panel Thickness Max 4.5mm
- * Nut Torque: 4-6 kgf.cm
- * Wire harness Tolerance: 150~300±15mm
301~1000±20mm
Over1000 ±40mm



UNIT:mm						TITLE M8 Panel With Wire Harness		ITEM NO 8-04PFFS-SH7AXX		DRAWN BY Tony_leng		DATE 2014-01-09	
TOLERANCE		SCALE 1:1		SIZE A4		SHEET 1 OF 1		DWG NO 8-04PFFS-SH7AXX		CHECKED BY jimmy		DATE 2014-01-09	
.X ±0.25		REV. B		WC-REV. B.2		Circled I: Inspection item		CUSTOMER ALTW		APPROVED BY Jerry		DATE 2014-01-09	
.XX ±0.1													
.XXX ±0.05													
ANGLES ±1°													

Amphenol LTW
安費諾亮泰企業股份有限公司

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[8-04PFFS-SH7AA0](#) [8-04PFFS-SH7A50](#) [8-04PFFS-SH7AA5](#) [8-04PFFS-SH7A15](#) [8-04PFFS-SH7A30](#)