
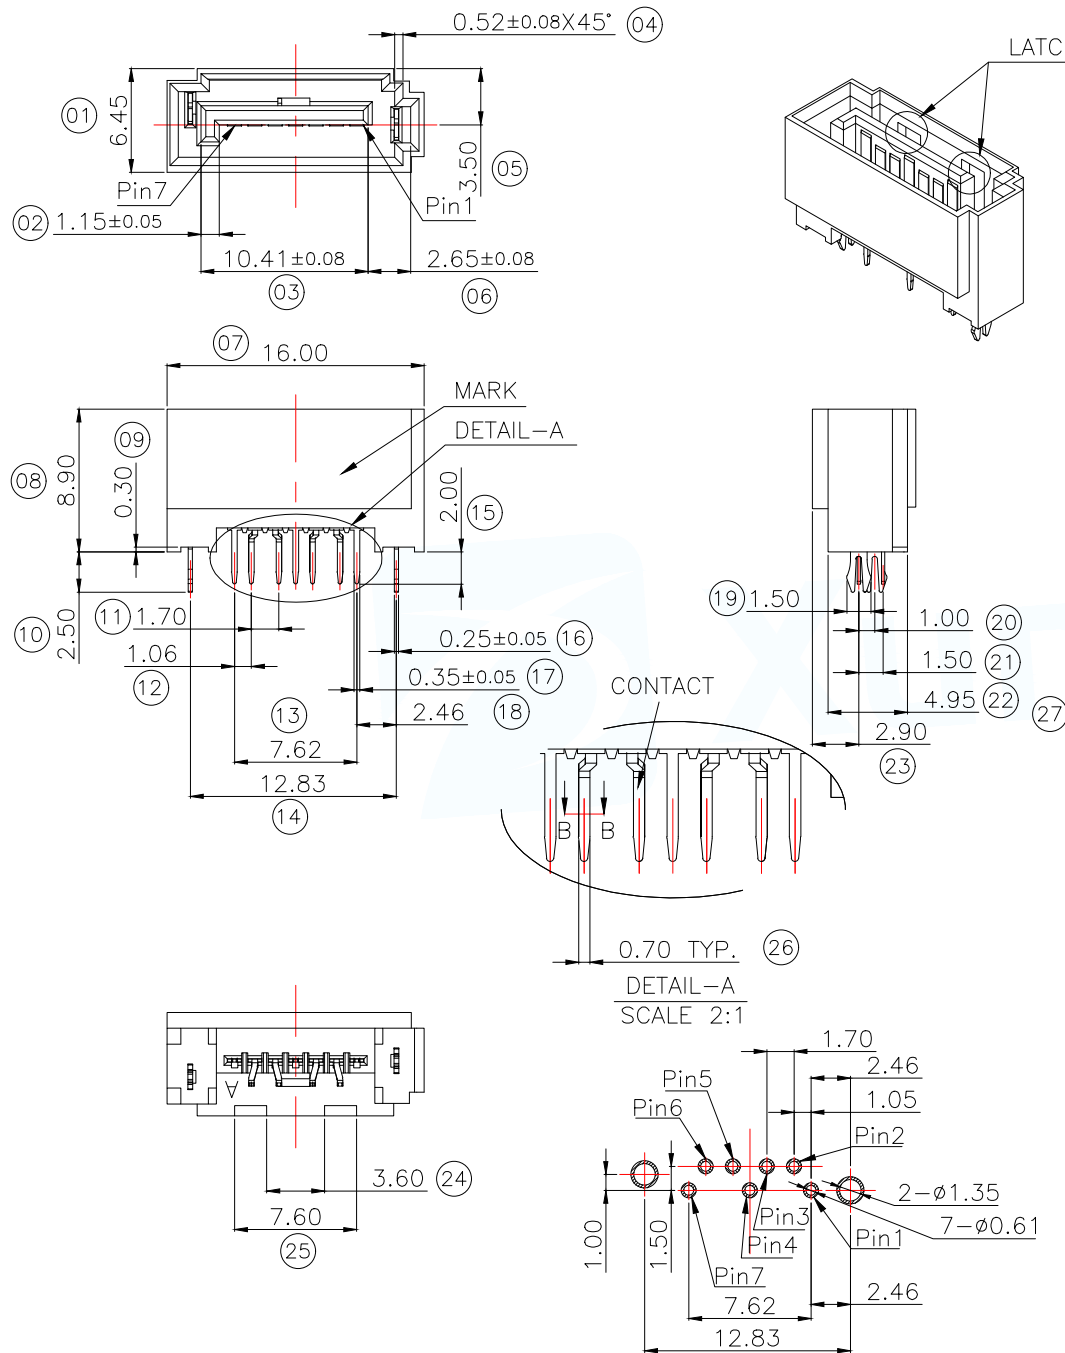




LATCHING FEATURE


- 1.MATERIAL SPECIFICATION,
1-1.HOUSING:PA66;
1-2.CONTACT:BRASS C2680;
1-3.HOOK:BRASS C2680;
- 2.PLATING SPECIFICATION,
2-1.CONTACT:
UNDER PLATING:Ni 50u" Min PLATED OVER ALL;
CONTACT AREA: SEE TABLE;
SOLDER TAIL: MATTE TIN 100u" Min PLATED ;
2-2.HOOK: MATTE TIN 100u" Min PLATED OVER Ni 50u" Min.
- 3.MECHANICAL PERFORMANCE,
3-1.INSERTION FORCE:45N Max
3-2.REMOVAL FORCE:10N Min
3-3.DURABILITY:50 CYCLES
- 4.ELECTRICAL PERFORMANCE,
4-1.CURRENT RATING:1.5A Max
4-2.INSULATION RESISTANCE:1000 MEGAOHMS Min.
4-3.DIELECTRIC WITHSTAND VOLTAGE:500VRMS AT SEA LEVEL
- 5.RoHS OR HF COMPLIANT.

SECTION B-B
SCALE 5:1

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: SATA 7Pin CONN 固定扣脚
			PAR SATA-501-M07S1BY-A
DECIMALS:	ANGLES:		DWN
X.±0.35	X.*±10°		CHKD
X.X±0.30	X.X*±5°	CUSTOMER COPY	APVD
X.XX±0.20	X.XX*±2°		SCALE N:A
		SIZE:A4	UNIT:MM
		SHEET:1F1	REV:A

3.Put the 30 trays of products into a water-repellent film,then put all of them into a carton.

4.Packed the carton,and the seal lppks like "I" shape.

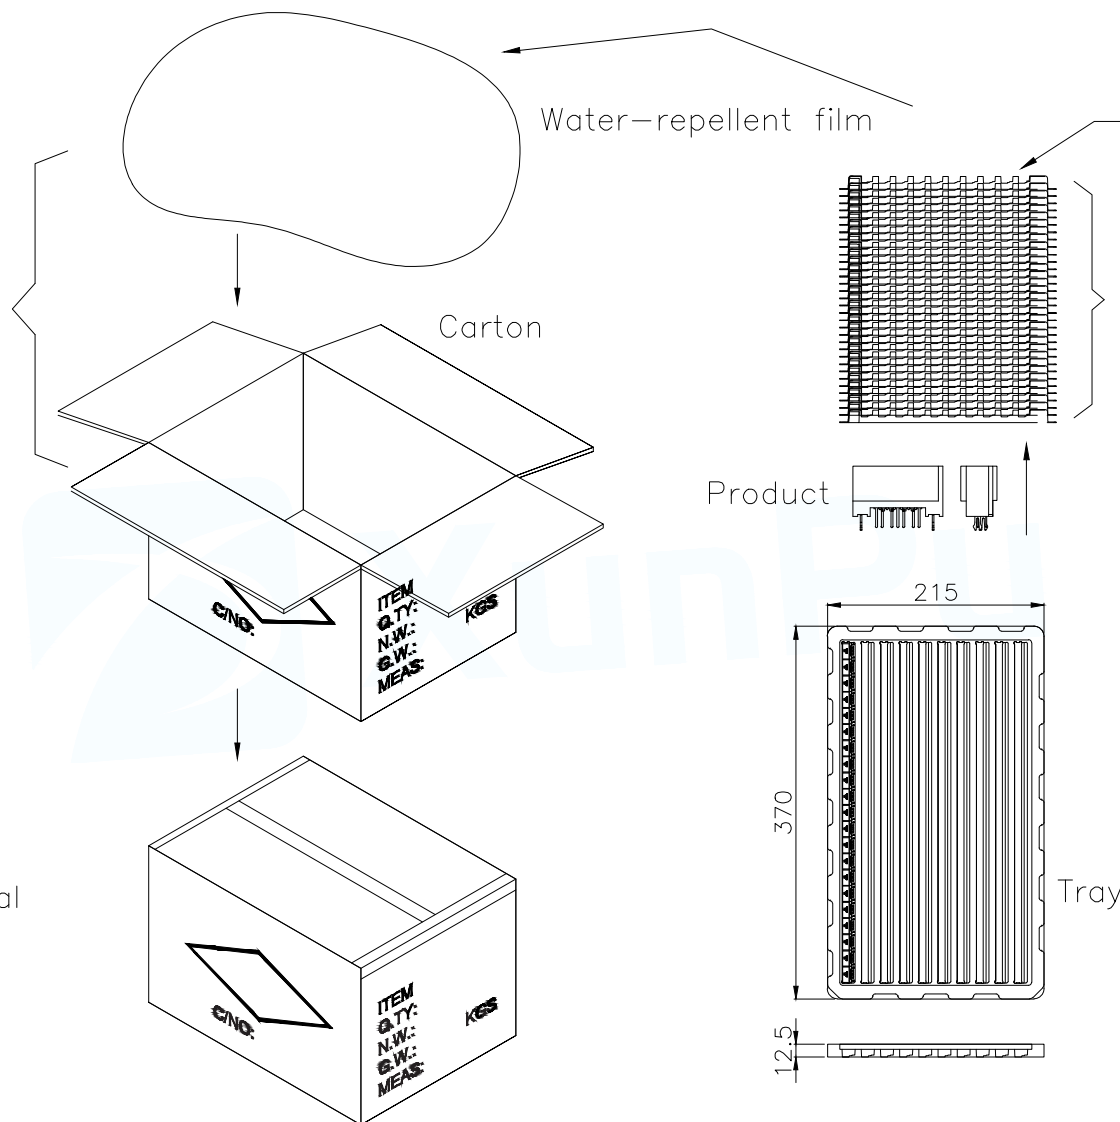

An empty tray on the top

2.Each 30 trays of products puts together,one tray over another one,like the picture shows,6300pcs products in all.

1.Put the good products which had inspected into the tray,210pcs per tray.

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: SATA 7Pin CONN	
			PAR	SATA-501-M07S1BY-A
			DWN	
			CHKD	
DECIMALS:	ANGLES:		APVD	
X.±0.35	X.'±10°		SCALE N:A	UNIT:MM
X.X±0.30	X.X'±5°		SIZE:A4	SHEET:1F1
X.XX±0.20	X.XX'±2°		CUSTOMER COPY	REV:A