

A/F无后盖无边弯脚/SMT (5. 85)

目錄
MAPX设变内容
MODIFICATION日期
DATE

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000M Ω Min.Contact Resistance: 30 M Ω Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-35°C to +85°C

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force: 3.5KG MAX

Unmating Force:0.7 KG MIN.

Contact finish:





01: Selective Gold Flash

02: Selective Gold 3U"

03: Selective Gold 5U"

04: Selective Gold 15U"

05: Selective Gold 30U"

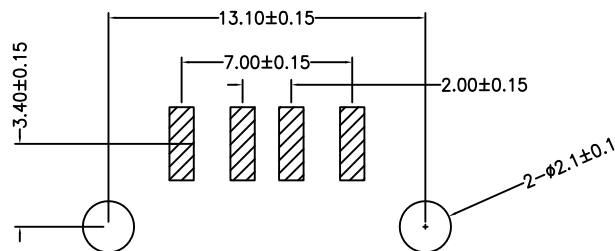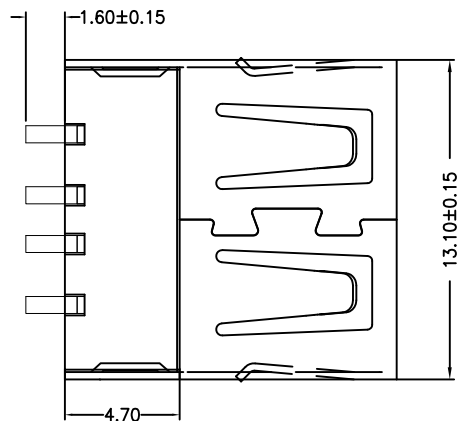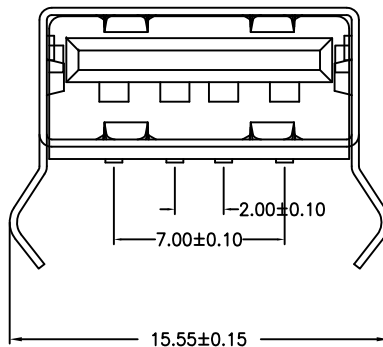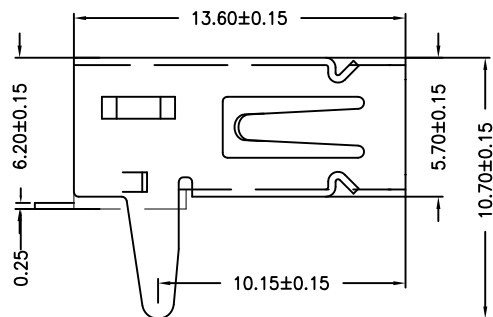

RBCOMMENDBD P.C.B PATTBRN LAYD UT

备注：侧弹分为外弹与内弹

产品图
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.35	X'.	±5'
.X	±0.25	.X'	±2'
.XX	±0.15	.XX'	±1'
.XXX	±0.10	.XXX'	±0.5'

单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	903-141A1014S10200
比例 SCALE	1:1	审核 CHKD	雷永键	产品名称 PRODUCT NO.	AF无后盖弯脚无边内弹改模后铁壳 一型5.85PBT白胶SMT 高6.2
日期 DATE	2014/05/24	核准 APPD	雷永键	角法 VIEW	版本 VER
					A0