


SN54LS113A, SN54S113, SN74LS113A, SN74S113A DUAL J-K NEGATIVE-EDGE-TRIGGERED FLIP-FLOPS WITH PRESET

D2661, APRIL 1982 — REVISED MARCH 1988

- Fully Buffered to Offer Maximum Isolation from External Disturbance
- Package Options Include Plastic "Small Outline" Packages, Ceramic Chip Carriers and Flat Packages, and Plastic and Ceramic DIPs
- Dependable Texas Instruments Quality and Reliability

SN54LS113A, SN54S113 ... J OR W PACKAGE
SN74LS113A, SN74S113A ... D OR N PACKAGE

(TOP VIEW)



description

These devices contain two independent J-K negative-edge-triggered flip-flops. A low level at the preset input sets the outputs regardless of the levels of the other inputs. When preset ($\overline{\text{PRE}}$) is inactive (high), data at the J and K inputs meeting the setup time requirements are transferred to the outputs on the negative-going edge of the clock pulse. Clock triggering occurs at a voltage level and is not directly related to the rise time of the clock pulse. Following the hold time interval, data at the J and K inputs may be changed without affecting the levels at the outputs. These versatile flip-flops can perform as toggle flip-flops by tying J and K high.


The SN54LS113A and SN54S113 are characterized for operation over the full military temperature range of -55°C to 125°C . The SN74LS113A and SN74S113A are characterized for operation from 0°C to 70°C .

FUNCTION TABLE (each flip-flop)

INPUTS				OUTPUTS	
$\overline{\text{PRE}}$	CLK	J	K	Q	$\overline{\text{Q}}$
L	X	X	X	H	L
H	$\downarrow$	L	L	Q_0	$\overline{\text{Q}}_0$
H	$\downarrow$	H	L	H	L
H	$\downarrow$	L	H	L	H
H	$\downarrow$	H	H	TOGGLE	TOGGLE
H	H	X	X	Q_0	$\overline{\text{Q}}_0$


SN54LS113A, SN54S113 ... FK PACKAGE

(TOP VIEW)



NC — No internal connection

logic symbol†



† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

Pin numbers shown are for D, J, N, and W packages.

2

TTL Devices

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

Copyright © 1982, Texas Instruments Incorporated


2-343

SN54LS113A, SN54S113, SN74LS113A, SN74S113A
DUAL J-K NEGATIVE-EDGE-TRIGGERED
FLIP-FLOPS WITH PRESET

logic diagrams (positive logic)



2

TTL Devices

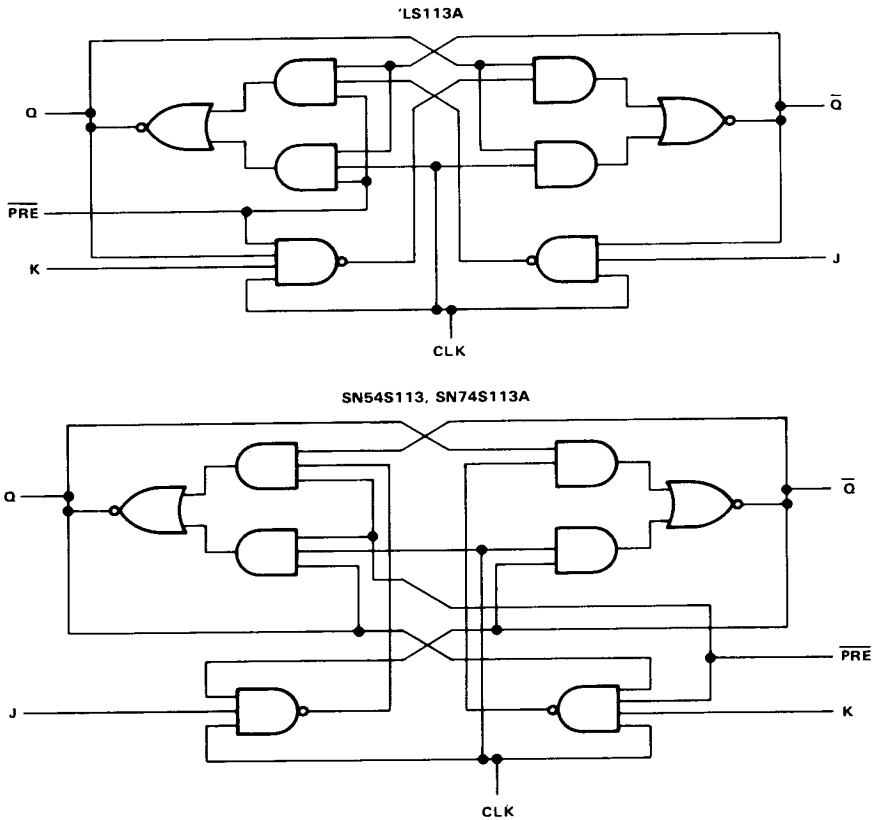

**SN54LS113A, SN74LS113A, SN54S113, SN74S113A
DUAL J-K NEGATIVE-EDGE-TRIGGERED
FLIP-FLOPS WITH PRESET**

schematics of inputs and outputs

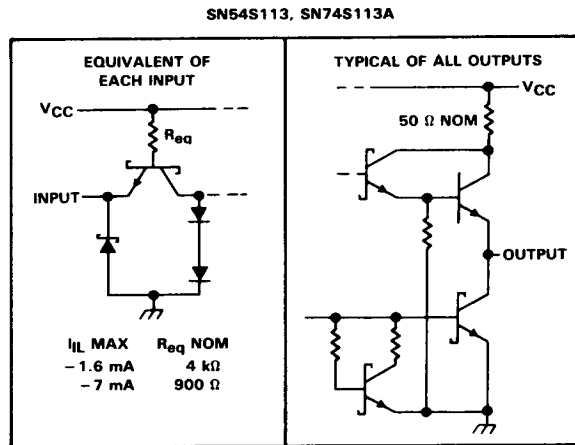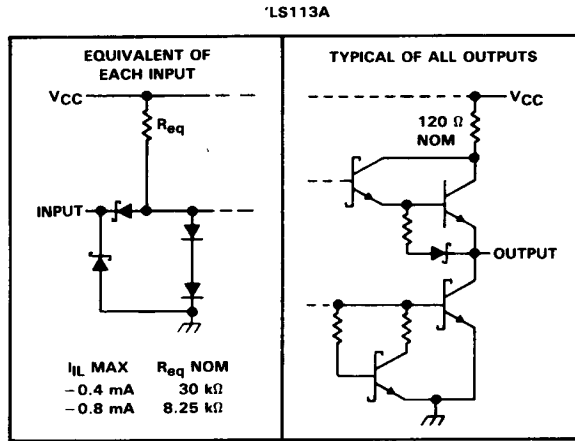

2

TTL Devices

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC} (see Note 1)	7 V
Input voltage: 'LS113A	7 V
SN54S113, SN74S113A	5.5 V
Operating free-air temperature range: SN54'	-55°C to 125°C
SN74'	0°C to 70°C
Storage temperature range	-65°C to 150°C

NOTE 1: Voltage values are with respect to network ground terminals.

SN54LS113A, SN74LS113A **DUAL J-K NEGATIVE-EDGE-TRIGGERED** **FLIP-FLOPS WITH PRESET**

recommended operating conditions

			SN54LS113A			SN74LS113A			UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage		4.5	5	5.5	4.75	5	5.25	V
V _{IH}	High-level input voltage		2			2			V
V _{IL}	Low-level input voltage				0.7			0.8	V
I _{OH}	High-level output current				-0.4			-0.4	mA
I _{OL}	Low-level output current				4			8	mA
f _{clock}	Clock frequency		0		30	0		30	MHz
t _w	Pulse duration	CLK high	20			20			ns
		PRE or CLR low	25			25			
t _{su}	Set up time-before CLK↓	Data high or low	20			20			ns
		PRE inactive	20			20			
t _h	Hold time-data after CLK↓		0			0			ns
T _A	Operating free-air temperature		-55			125			°C

2

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†			SN54LS113A			SN74LS113A			UNIT
					MIN	TYP‡	MAX	MIN	TYP‡	MAX	
V _{IK}		V _{CC} = MIN, I _I = -18 mA			-1.5			-1.5			V
V _{OH}		V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = MAX, I _{OH} = -0.4 mA			2.5	3.4		2.7	3.4		V
V _{OL}		V _{CC} = MIN, V _{IL} = MAX, V _{IH} = 2 V, I _{OL} = 4 mA			0.25		0.4	0.25		0.4	V
		V _{CC} = MIN, V _{IL} = MAX, V _{IH} = 2 V, I _{OL} = 8 mA						0.35		0.5	
I _I	J or K	V _{CC} = MAX, V _I = 7 V			0.1			0.1			mA
	PRE				0.3			0.3			
	CLK				0.4			0.4			
I _{IH}	J or K	V _{CC} = MAX, V _I = 2.7 V			20			20			µA
	PRE				60			60			
	CLK				80			80			
I _{IL}	J or K	V _{CC} = MAX, V _I = 0.4 V			-0.4			-0.4			mA
	PRE or CLK				-0.8			-0.8			
I _{OS} §		V _{CC} = MAX, see Note 2			-20		-100	-20		-100	mA
I _{CC} (Total)		V _{CC} = MAX, see Note 3			4		6	4		6	mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V_{CC} = 5 V, T_A = 25°C.

§ Not more than one output should be shorted at a time, and the duration of the short-circuit should not exceed one second.

NOTES: 2. For certain devices where state commutation can be caused by shorting an output to ground, an equivalent test may be performed with V_O = 2.25 V and 2.125 V for the '54 family and the '74 family, respectively, with the minimum and maximum limits reduced to one half of their stated values.

3. With all outputs open, I_{CC} is measured with the Q and $\bar{Q}$ outputs high in turn. At the time of measurement, the clock input is grounded.

SN54LS113A, SN74LS113A
DUAL J-K NEGATIVE-EDGE-TRIGGERED
FLIP-FLOPS WITH PRESET

switching characteristics, $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$ (see Note 4)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
f _{max}			R _L = 2 kΩ, C _L = 15 pF	30	45		MHz
t _{PLH}	PRE or CLK	Q or Q̄			15	20	ns
t _{PHL}					15	20	ns

NOTE 4: Load circuits and voltage waveforms are shown in Section 1.

2

TTL Devices



POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

2-347

SN54S113, SN74S113A **DUAL J-K NEGATIVE-EDGE-TRIGGERED** **FLIP-FLOPS WITH PRESET**

recommended operating conditions

		SN54S113			SN74S113A			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
V _{IH}	High-level input voltage	2			2			V
V _{IL}	Low-level input voltage			0.8			0.8	V
I _{OH}	High-level output current			-1			-1	mA
I _{OL}	Low-level output current			20			20	mA
t _w	Pulse duration	CLK high	6		6			ns
		CLK low	6.5		6.5			
		PRE low	8		8			
t _{su}	Set up time-before CLK↓	Data high or low	7		7			ns
t _h	Hold time-data after CLK↓		0		0			ns
T _A	Operating free-air temperature	-55	125		0	70		°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†			SN54S113			SN74S113A			UNIT
					MIN	TYP‡	MAX	MIN	TYP‡	MAX	
V _{IK}		V _{CC} = MIN,	I _I = -18 mA				-1.2			-1.2	V
V _{OH}		V _{CC} = MIN,	V _{IH} = 2 V, V _{IL} = 0.8 V, I _{OH} = -1 mA		2.5	3.4		2.7	3.4		V
V _{OL}		V _{CC} = MIN,	V _{IH} = 2 V, V _{IL} = 0.8 V, I _{OL} = 20 mA				0.5			0.5	V
I _I		V _{CC} = MAX,	V _I = 5.5 V				1			1	mA
I _{IH}	J or K	V _{CC} = MAX,	V _I = 2.7 V				50			50	µA
	PRE or CLK						100			100	
I _{IL}	J or K	V _{CC} = MAX,	V _I = 0.5 V				-1.6			-1.6	mA
	PRE [§]						-7			-7	
	CLK [§]						-4			-4	
I _{OS} [¶]		V _{CC} = MAX			-40	-100		-40	-100		mA
I _{CC} [#]		V _{CC} = MAX,	see Note 3		15	25		15	25		mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V_{CC} = 5 V, T_A = 25°C.

§ Clear is tested with preset high and preset is tested with clear high.

¶ Not more than one output should be shorted at a time, and the duration of the short-circuit should not exceed one second.

Values are average per flip-flop.

NOTE 3: With all outputs open, I_{CC} is measured with the Q and $\bar{Q}$ outputs high in turn. At the time of measurement, the clock input is grounded.

switching characteristics, V_{CC} = 5 V, T_A = 25°C (see Note 4)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
f _{max}			R _L = 280 Ω, C _L = 15 pF	80	125		MHz
t _{PLH}	PRE	Q or Q̄			4	7	ns
t _{PHL}	PRE (CLK high)	Q̄ or Q			5	7	ns
	PRE (CLK low)				5	7	
t _{PLH}	CLK	Q or Q̄			4	7	ns
t _{PHL}					5	7	ns

NOTE 4: Load circuits and voltage waveforms are shown in Section 1.