

由Autodesk教育版产品制作

由Autodesk教育版产品制作

由Autodesk教育版产品制作



由Autodesk教育版产品制作

RoHS




MAPX

MODIFICATION

DATE

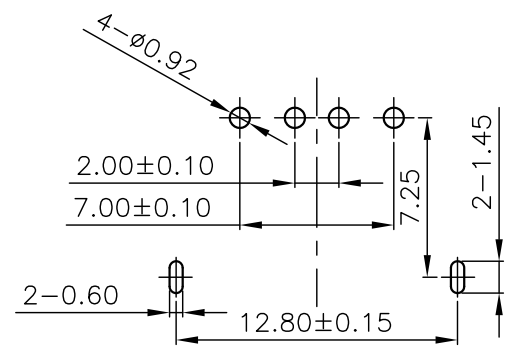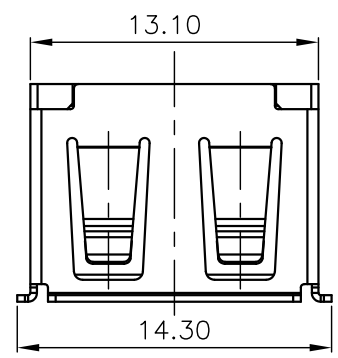

FRONT EDGE OF CONNECTOR
PCB LAYOUT

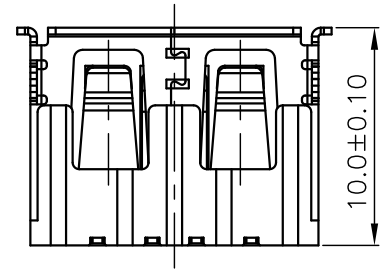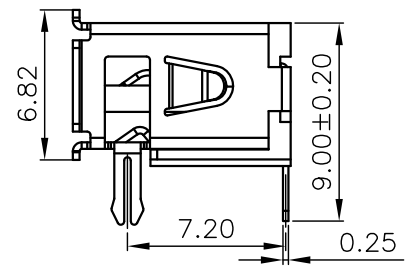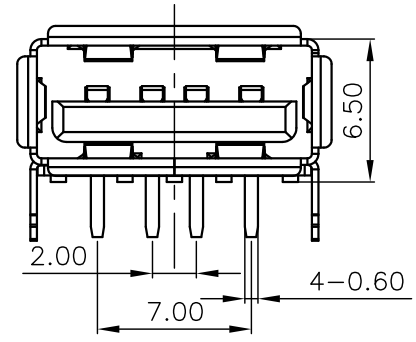

- Note:
- 1. Material:
 - 1.1, Housing: High temperature thermoplastic with/black G/F, UL94v-0
 - 1.2, Contact: copper alloy, t=0.25mm
 - 1.3, Shell: copper/Ferroalloy alloy, t=0.30mm
 - 2. Specification:
 - 2.1, Current rating: 1.5A Max.
 - 2.2, Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - 2.3, Contact resistance: 30 mΩ Max.
 - 2.4, Insulation resistance: 100 MΩ Min.
 - 2.5, Total mating force: 3.57 Kgf Max.
 - 2.6, Total unmating force: 1.0 Kgf Min.
 - 3. Finish:
 - 3.1, Contact: Plated Gold in Mating Area: Tin On Solder Tails
 - Shell: Nickel Plating
 - 4. Environmental:
 - 4.1, Temperature range: -55°C~85°C

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司							
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	许榕强	制图料号 PRODUCT PART NO.	910-151B1017D10100		
X.	±0.35	X.	±5.°	比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF10. 0C款前两脚有边铁壳反向PBT白胶6.5DIP		
.X	±0.20	.X	±2.°	日期 DATE	2016-09-09	核准 APPD	黄国荣	角法 VIEW		版本 VER	A0
.XX	±0.10	.XX	±1.°								
.XXX	±0.05	.XXX	±0.5°								