

由Autodesk 教育版产品制作

由Autodesk 教育版产品制作








RoHS

MAPX

MODIFICATION

DRW

DATE

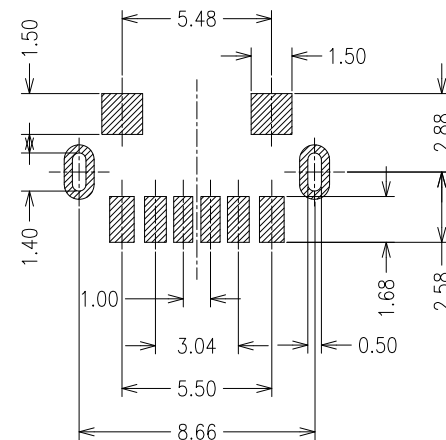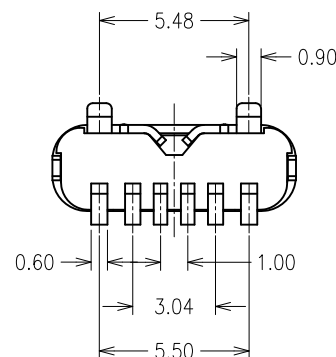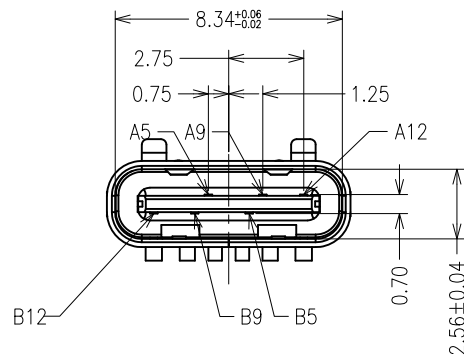

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm


SPECIFICATION

1. ELECTRICAL CHARACTERISTICS:

- 1-1. VOLTAGE&CURRENT RATING:DC 30V MAX&3A
- 1-2. CONTACT RESISTANCE: 40mΩ MAX INITIAL.
- 1-3. INSULATION RESISTANCE:
1000MΩ MIN FOR VOLTAGE 100VDC.
- 1-4. DIELECTRIC WITHSTAND: 100V AC for 1 MINUTE
- 1-5. OPERATING TEMPERATURE: -25°C~+85°C

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERT FORCE: 5-20N Max
- 2-2. WITHDRAW FORCE: 5-20N Min
- 2-3. LIFE TEST :3,000 CYCLES

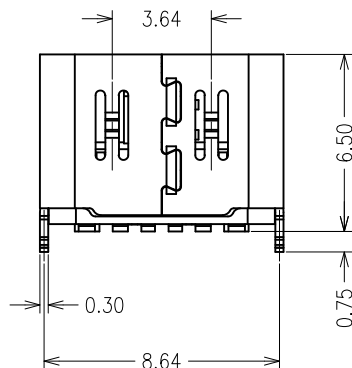

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

A5	CC1	B12	GND	X.	±0.25	X.	±5.°
A9	VBUS	B9	VBUS	.X	±0.20	.X	±2.°
A12	GND	B5	CC2	.XX	±0.15	.XX	±1.°
PIN	SIGNAL NAME	PIN	SIGNAL NAME	.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	XZQ	制图料号 PRODUCT PART NO.	918-418K2022Y40008
比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NO.	TYPE C3.1母座直立式两插两贴不锈钢 6.5/8.64端子SMT有弹 6PIN
日期 DATE	2016-09-09	核准 APPD	黄国荣	角法 VIEW	版本 VER
					A0

由Autodesk 教育版产品制作