
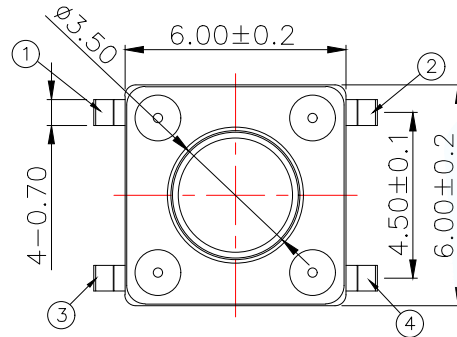

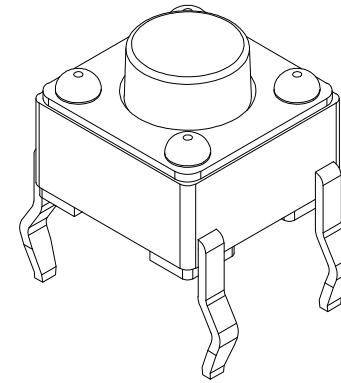
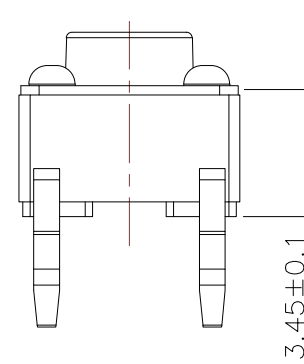


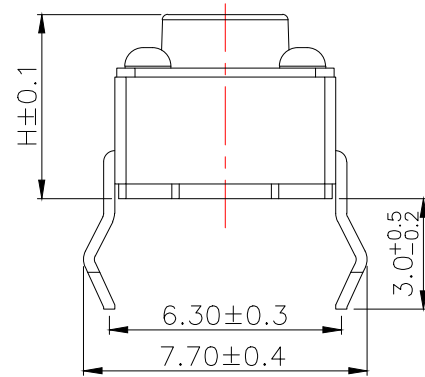

H
4.3
4.5
4.8
5.0
.....
18.0

TS-1002-

--	--	--	--	--	--	--	--	--	--

弹片:

A:不锈钢

B:覆磷铜

定位柱:

R:无柱

高度:

043:4.3H

045:4.5H

048:4.8H

050:5.0H


055:5.5H

...

力度:

16:160g


26:260g

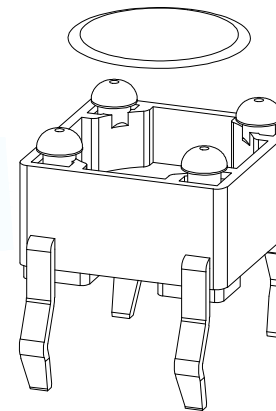

主要技术参数、性能


The Main Thchnology Performance

额定电流、电压 Rate voltage,current	50mA DC12V
接触电阻 Contact resistance	≤100mΩ
按力 Operating force	±50gf
行程 travel	0.2±0.1mm
绝缘电阻 Insulated resistance	≥100MΩ
介电强度 Dielectric strength	≥250VAC/1min
电气寿命 Electrical Life	≥100.000 Cycles



电路图

CIRCUIT DIAGRAM



PCB.焊接图

PCB.WELDING DRAWING

E	按钮	PPA	1	黑色
D	盖板	铜盖板	1	镀铜锡
C	弹片	不锈钢	1	镀银
B	本体	PPA	1	黑色
A	卡件	黄铜	1	镀银
项目 ITEM	名称 DESCRIPTION	材质 MATERIAL	数量 QTY	表面处理/颜色 FINSH/COLOR
MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: 0.5~2±0.10 2~5±0.25 5~10±0.30		ANGLES: ±0.5°		TITLE: TACT SWITCH PAR TS-1002-AR05026-ZM DWN CHKD APVD SCALE:1:1 SIZE:A4
CUSTOMER COPY		UNIT:MM SHEET:1F1		REV:A