

2200932

https://www.phoenixcontact.com/us/products/2200932

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Press-drawn section housings, Basic profile front plate, width: 71.8 mm, length: 991.3 mm, depth: 2 mm, recommended for UM-ALU 4-..COVER PA.. lateral elements



Your advantages

- · Aluminum extruded profile
- · Variety of connection technology
- · Can be mounted on the DIN rail
- Available in lengths from 42.5 mm ... 990 mm, can be cut to any length
- · Available in overall widths of 75 mm and 105 mm
- EMC protection

Commercial data

Item number	2200932
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	ACHDFC
Catalog page	Page 744 (C-1-2013)
GTIN	4046356720878
Weight per piece (including packing)	386 g
Weight per piece (excluding packing)	386 g
Country of origin	DE



2200932

https://www.phoenixcontact.com/us/products/2200932

Technical data

Product properties

Product type	Component housing cover
Housing type	Press-drawn section housings
Housing series	UM-ALU
Product family	UM-ALU 4-72
Туре	Basic profile front plate
Ventilation openings present	no

Dimensions

Width	71.8 mm
Depth	2 mm
Length	991.3 mm

Material specifications

Color (Housing)	aluminum
Housing material	Aluminum
Surface characteristics	anodized

Environmental and real-life conditions

Ambient conditions

Max. IP code to attain	IP40
Ambient temperature (operation)	-40 °C 100 °C (depending on power dissipation)
Ambient temperature (storage/transport)	-40 °C 55 °C
Ambient temperature (assembly)	-5 °C 100 °C




https://www.phoenixcontact.com/us/products/2200932



Drawings

Schematic diagram

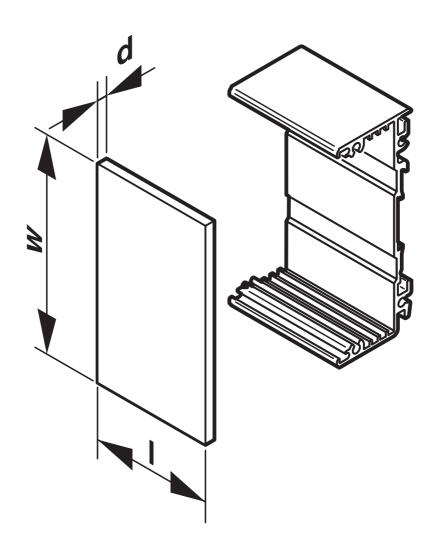



2200932

https://www.phoenixcontact.com/us/products/2200932

Classifications

ECLASS

	ECLASS-11.0	27182701
	ECLASS-13.0	27190605
ETIM		
	ETIM 9.0	EC002779
UNSPSC		
О.	101 00	
	UNSPSC 21.0	31261500



2200932

https://www.phoenixcontact.com/us/products/2200932

Environmental product compliance

Fulfills EU RoHS substance requirements	Yes, No exemptions	
China RoHS		
Environment friendly use period (EFUP)	EFUP-E	
	No hazardous substances above the limits	
EU REACH SVHC		
REACH candidate substance (CAS No.)	No substance above 0.1 wt%	



2200932

https://www.phoenixcontact.com/us/products/2200932

Mandatory accessories

UM-ALU 4-72 PROFILE 990 - Profile

2200924

https://www.phoenixcontact.com/us/products/2200924



Press-drawn section housings, Screw mounting, Basic profile, profile width (internal): 72 mm, profile width (external): 75 mm, length: 990 mm, depth: 29.4 mm

UM-ALU 4-72 COVER PA BK - Lateral element

2200934

https://www.phoenixcontact.com/us/products/2200934



Press-drawn section housings, Screw mounting, Side elements (left and right) incl. snap-on foot and screws for basic profile, width: 75.4 mm

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com