

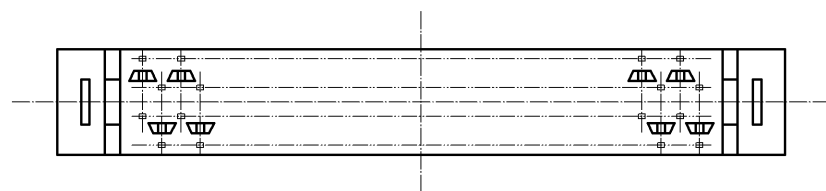
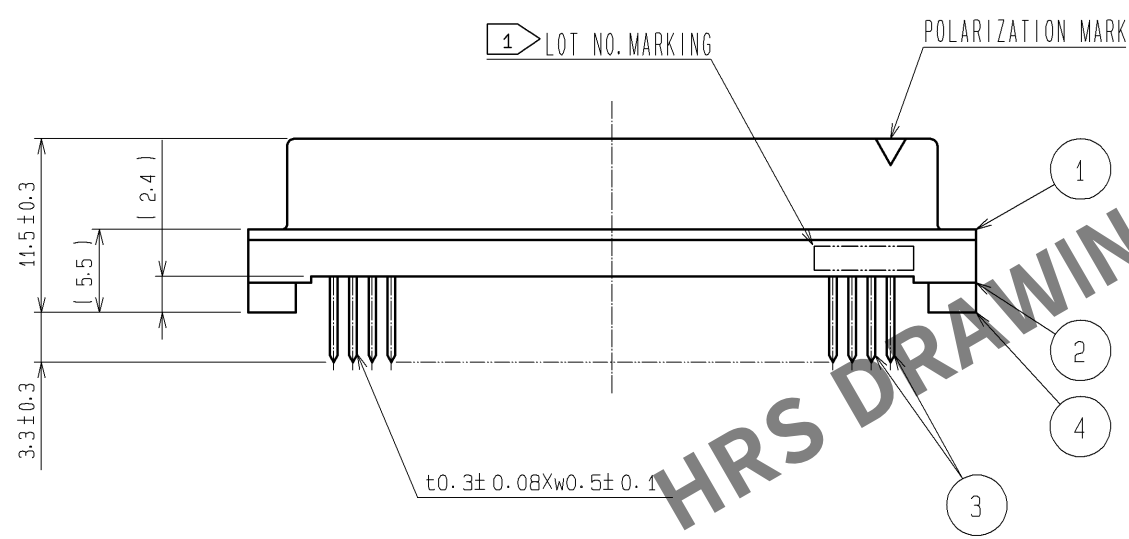
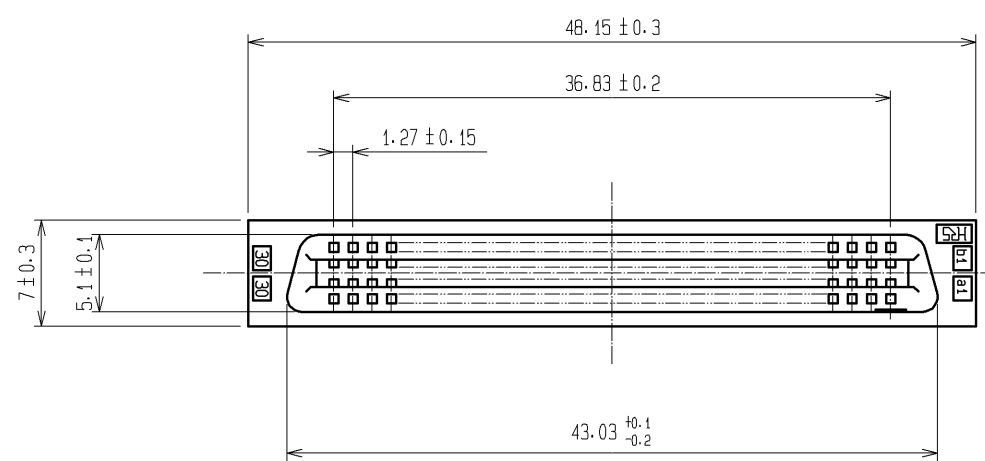



Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

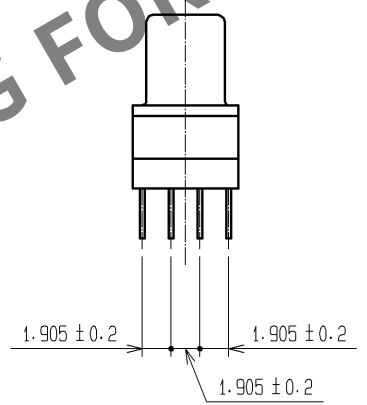

RECOMMENDED PC BOARD HOLE PATTERN
(MOUNTING SIDE) t=1.6

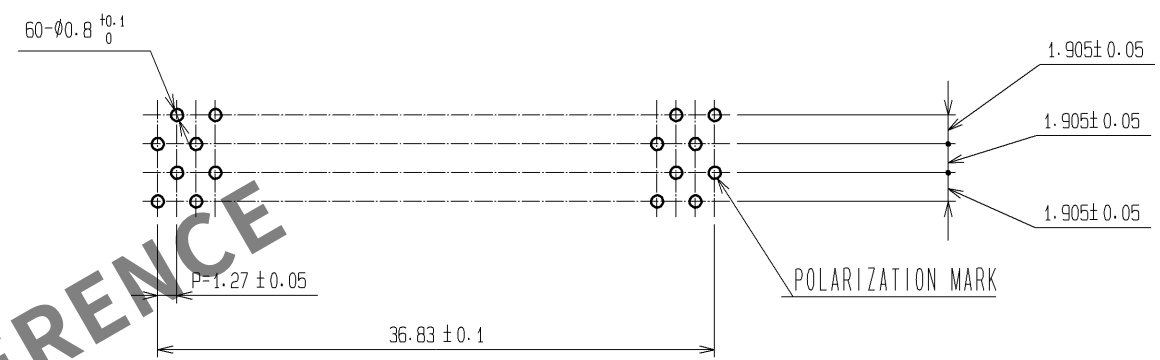

- NOTES 1 LOT NO. MARKING SIDE SHALL BE OPTIONAL.
2. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

			3		PHOSPHOR BRONZE		CONTACT AREA : GOLD 0.2μm min.			
							DIP AREA : TIN-PLATING 2μm min.			
							UNDER PLATING : NICKEL 2μm min.			
1. 2. 4	POLYAMIDE	BLACK , UL94V-0								
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE	
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		07. 08. 10	DRAWING NO.		EDC3-083215-21			
		CHECED : HS. OZAWA		07. 08. 10	PART NO.		FX2C2-60S-1. 27DSA (71)			
		DESIGNED : KY. NAKAMURA		07. 08. 10	CODE NO.		CL572-2425-5-71			
		DRAWN : TP. MATSUMOTO		07. 08. 09			 1/1			