
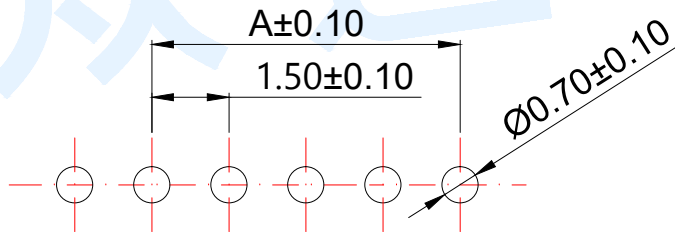
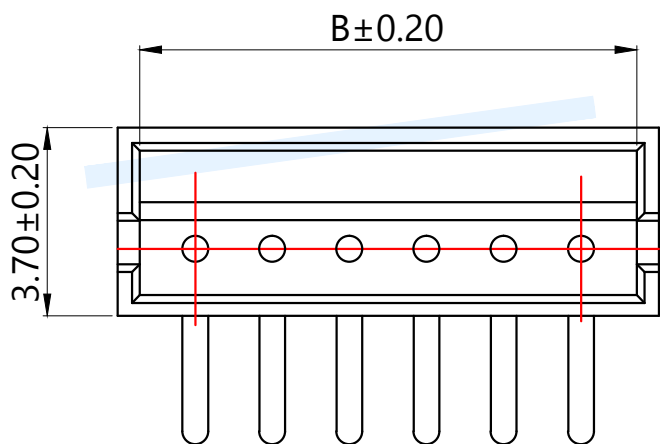
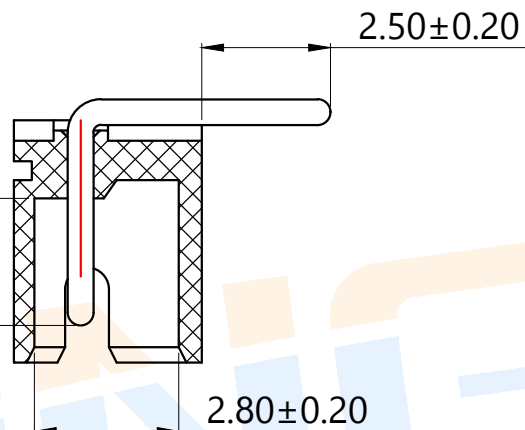


RoHS

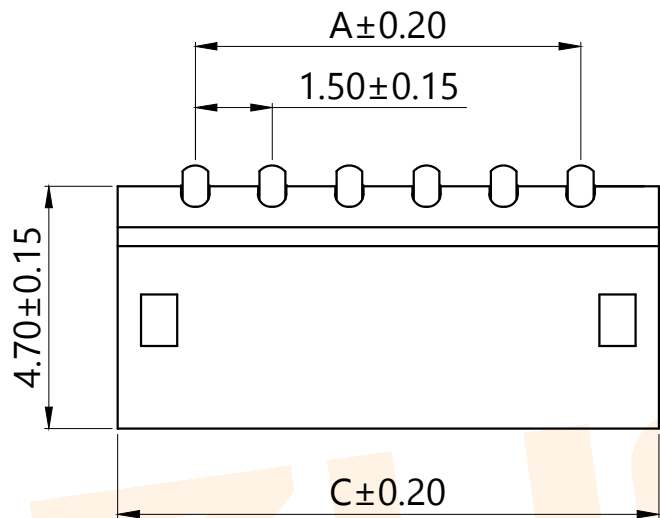

适用线路板 (PCB LAYOUT)

Model No.	Pin	A	B	C
WAFER-ZH1.5-2PWZ-W6	2	1.50	3.60	4.50
WAFER-ZH1.5-3PWZ-W6	3	3.00	5.10	6.00
WAFER-ZH1.5-4PWZ-W6	4	4.50	6.60	7.50
WAFER-ZH1.5-5PWZ-W6	5	6.00	8.10	9.00
WAFER-ZH1.5-6PWZ-W6	6	7.50	9.60	10.50
WAFER-ZH1.5-7PWZ-W6	7	9.00	11.10	12.00
WAFER-ZH1.5-8PWZ-W6	8	10.50	12.60	13.50
WAFER-ZH1.5-9PWZ-W6	9	12.00	14.10	15.00
WAFER-ZH1.5-10PWZ-W6	10	13.50	15.60	16.50
WAFER-ZH1.5-11PWZ-W6	11	15.00	17.10	18.00
WAFER-ZH1.5-12PWZ-W6	12	16.50	18.60	19.50
WAFER-ZH1.5-13PWZ-W6	13	18.00	20.10	21.00
WAFER-ZH1.5-14PWZ-W6	14	19.50	21.60	22.50
WAFER-ZH1.5-15PWZ-W6	15	21.00	23.10	24.00
WAFER-ZH1.5-16PWZ-W6	16	22.50	24.60	25.50
WAFER-ZH1.5-17PWZ-W6	17	24.00	26.10	27.00
WAFER-ZH1.5-18PWZ-W6	18	25.50	27.60	28.50
WAFER-ZH1.5-19PWZ-W6	19	27.00	29.10	30.00
WAFER-ZH1.5-20PWZ-W6	20	28.50	30.60	31.50

Specifications/技术规格:

- 1.Poles/线数: 2~20P
- 2.Wire range/适用线规: AGW 32#~26#
- 3.Applicable PC board thickness/适用PC板厚度: 0.6~1.2mm
- 4.Current rating/额定电流: 1.0A
- 5.Voltage rating/额定电压: 100V AC/DC
- 6.Insulation Resistance/绝缘电阻: 500MΩ Min
- 7.Dielectric Withstanding/ 耐电压: 500V AC/minute
- 8.Contact Resistance/ 接触电阻: 20mΩ Max
- 9.Operating Temperature/ 工作温度: -25℃ to +85℃

Ⓑ	Terminal			Brass	Plating Sn
Ⓐ	Housing		1	PA66	Off White
NO.	Name	Number	Qty	Materil	Remarks

ZHONGDI® Zhongdi Electronic Technology Co., Ltd

design	date	name	WAFER CONNECTOR
Review	date	model	WAFER-ZH1.5-□□PWZ-W6
Approved	date		

Drawing number:	Proportion	1:1	unit	mm	gaps number	A4
-----------------	------------	-----	------	----	-------------	----